

ChangeMan[®] ZDD 8.1.4

COM Programming Interface Guide

Proprietary and Confidential Information

Copyright © 2001-2017 Serena Software, Inc., a Micro Focus company. All rights reserved.

This document, as well as the software described in it, is furnished under license and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this publication may be reproduced, photocopied, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of Serena. Any reproduction of such software product user documentation, regardless of whether the documentation is reproduced in whole or in part, must be accompanied by this copyright statement in its entirety, without modification.

This document contains proprietary and confidential information, and no reproduction or dissemination of any information contained herein is allowed without the express permission of Serena Software.

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Serena. Serena assumes no responsibility or liability for any errors or inaccuracies that may appear in this document.

Trademarks

Serena, TeamTrack, StarTool, PVCS, Comparex, Dimensions, Prototype Composer, Mariner, and ChangeMan are registered trademarks of Serena Software, Inc. The Serena logo and Version Manager are trademarks of Serena Software, Inc. All other products or company names are used for identification purposes only, and may be trademarks of their respective owners.

U.S. Government Rights

Any Software product acquired by Licensee under this Agreement for or on behalf of the U.S. Government, its agencies and instrumentalities is "commercial software" as defined by the FAR. Use, duplication, and disclosure by the U.S. Government is subject to the restrictions set forth in the license under which the Software was acquired. The manufacturer is Serena Software, Inc., 2345 NW Amberbrook Drive, Suite 200, Hillsboro, OR 97006 USA

Publication date: September 2017

Table of Contents

	Welcome to ChangeMan ZDD	7
	Guide to ChangeMan ZDD Documentation	8
	Documentation Suite	9
	Related Documents	10
	Using the Manuals	10
	Accessing Online Help	11
	Viewing Help Topics	12
	Viewing Context-Sensitive Help	12
	Accessing Help for the ChangeMan Utilities	12
<i>Chapter 1</i>	Introduction	13
	What is ChangeMan ZDD?	13
	What is Automation?	13
	Security	14
	Compatibility	15
	PC Requirements	15
	Mainframe Server Requirements	15
	Changes	16
<i>Chapter 2</i>	Using the Programming Interface	19
	Naming Conventions	19
	Connecting to ChangeMan ZDD	20
	Object Model	20
	Collections	24
	ZosNetwork	25
	ZosNetwork Properties	25
	ZosServers	28
	ZosServers Properties	28
	ZosServers Methods	28
	ZosServer	30
	ZosServer Properties	30

ZosServer Methods	32
ZosFileExtensionMappings.	34
ZosFileExtensionMappings Properties.	34
ZosFileExtensionMappings Methods	34
ZosFileExtensionMapping	35
ZosFileExtensionMapping Properties	35
ZosFileFormatMappings	35
ZosFileFormatMappings Properties	35
ZosFileFormatMappings Methods.	36
ZosFileFormatMapping	37
ZosFileFormatMapping Properties	37
ZosLibypeMappings	38
ZosLibypeMappings Properties	38
ZosLibypeMappings Methods.	39
ZosLibypeMapping	40
ZosLibypeMapping Properties	40
ZosDataSetProfiles.	41
ZosDataSetProfiles Properties.	41
ZosDataSetProfiles Methods	41
ZosDataSetProfile	43
ZosDataSetProfile Properties	43
ZosJobFolders	44
ZosJobFolders Properties	44
ZosJobFolders Methods	44
ZosJobFolder.	45
ZosJobFolder Properties	46
ZosDataSetFolders.	47
ZosDataSetFolders Properties	47
ZosDataSetFolders Methods	47
ZosDataSetFolder	48
ZosDataSetFolder Properties.	48
ZosChangeManInstances	49
ZosChangeManInstances Properties.	49
ZosChangeManInstances Methods.	49
ZosChangeManInstance	49
ZosChangeManInstance Properties	50
ZosChangeManInstance Methods	50
ZosNameFilters	51

	ZosNameFilters Properties	51
	ZosNameFilters Methods	51
	ZosPrefixMappings	52
	ZosPrefixMappings Properties	52
	ZosPrefixMappings Methods.	52
	ZosPrefixMapping	53
	ZosPrefixMapping Properties	53
<i>Chapter 3</i>	Examples	55
	Overview	55
	Logging on to a Server	56
	In VBScript	56
	In JScript	58
	Submitting JCL to a Server	60
	In VBScript	61
	In JScript	62
	Configuring ChangeMan ZDD for a New User	63
	In VBScript	64
	In JScript	70
	Using Windows Task Scheduler.	76
	Index.	77

Welcome to ChangeMan ZDD

ChangeMan ZDD is a network file system that operates on a PC networked with a z/OS[®] operating system. From your PC, you can access data sets, job output, and ChangeMan[®] ZMF components that reside on a z/OS server.

See the Readme file for the latest updates and corrections for this manual. The Readme file is available through the Micro Focus SupportLine website at <https://supportline.microfocus.com/productdoc.aspx>.

Before You Begin	<p>The COM programming interface documented in this manual is still supported in ChangeMan ZDD 8.1.4; however, a new .NET programming interface was introduced with the 6.1 release. It is recommended that you use the .NET programming interface for new programs and scripts, for the following reasons:</p> <ul style="list-style-type: none">■ The .NET interface contains more functionality than the COM interface.■ The .NET framework provides a more powerful programming environment.
Audience and scope	<p>Refer to the new <i>ChangeMan ZDD .NET Programming Interface Guide</i> for information on how to use the .NET interface.</p> <p>This manual is intended for System Administrators or any other users who want to perform ChangeMan ZDD operations from their own programs and scripts that support COM (Component Object Model) objects.</p> <p>By accessing the functionality of ChangeMan ZDD, you can simplify some common tasks, such as:</p> <ul style="list-style-type: none">■ Automating configuration tasks for setting up ChangeMan ZDD on multiple desktops.■ Logging on to a z/OS server from your program or script.■ Submitting JCL to a z/OS server from your program or script.
Changes to this manual	<p>Substantive changes to this manual in this release are marked with change bars in the left margin.</p>

Manual Organization This manual is organized as follows:

This chapter...	Contains this information...
1	Overview of ChangeMan ZDD and the Automation interface.
2	Description of the ChangeMan ZDD object model and how to use the Automation interface to access ChangeMan ZDD functions.
3	Examples of how to use ChangeMan ZDD functions from VBScript and JScript®.
Index	Index of ChangeMan ZDD subjects.

Guide to ChangeMan ZDD Documentation

The following sections provide basic information about ChangeMan ZDD documentation. These manuals are available through the Micro Focus SupportLine website at <https://supportline.microfocus.com/productdoc.aspx>.

Documentation Suite

The ChangeMan ZDD documentation set includes the following manuals in PDF format.

Manual	Description
ChangeMan ZDD User's Guide	Explains how to: <ul style="list-style-type: none"> ■ Install and configure the client components on your PC ■ Access and perform operations on mainframe data from your desktop
ChangeMan ZDD .NET Programming Interface Guide	Describes how to use the .NET programming interface to access ChangeMan ZDD functionality from your own programs and scripts.
ChangeMan ZDD COM Programming Interface Guide	Describes how to access ChangeMan ZDD functionality, using COM Automation, from your own programs and scripts.
ChangeMan ZDD Tools Guide	Describes the following tools that you can use to assist in your development: <ul style="list-style-type: none"> ■ ChangeMan Edit ■ ChangeMan Diff These tools use the Template Manager to control how your code is displayed.
ChangeMan ZDD Server Installation Guide	Instructions for installing the server components of ChangeMan ZDD on the mainframe.
ChangeMan ZDD Edit Reference Card	Provides a summary of keyboard shortcuts that you can use with ZDD editing facilities.
SER10TY User's Guide	Instructions for applying licenses to enable ChangeMan ZDD servers on the mainframe.

Related Documents

The following documents provide additional information that may be useful to ChangeMan ZDD users.

Manual	Description
ChangeMan ZMF User's Guide	Provides instructions for using functions and facilities of ChangeMan ZMF to manage changes to application software. Many of these functions are available through ChangeMan ZDD.
ChangeMan ZMF Messages Guide	Provides explanations for informational, warning, and error messages for ChangeMan ZMF. These messages may be displayed when accessing ChangeMan ZMF through ChangeMan ZDD.
ChangeMan ZMF: XML Services User's Guide	Describes how to use XML Services, an XML programming interface to ChangeMan ZMF.

Using the Manuals

The ChangeMan ZDD manuals use the Adobe Portable Document Format (PDF). To view PDF files, use Adobe® Reader®, which is freely available from www.adobe.com.



TIP

Be sure to download the *full version* of Reader. The more basic version does not include the search feature.

This section highlights some of the main Reader features. For more detailed information, see the Adobe Reader online help system.

The PDF manuals include the following features:

- **Bookmarks.** All of the manuals contain predefined bookmarks that make it easy for you to quickly jump to a specific topic. By default, the bookmarks appear to the left of each online manual.

- **Links.** Cross-reference links within a manual enable you to jump to other sections within the manual and to other manuals with a single mouse click. These links appear in blue.
- **Printing.** While viewing a manual, you can print the current page, a range of pages, or the entire manual.
- **Advanced search.** Starting with version 6, Adobe Reader includes an advanced search feature that enables you to search across multiple PDF files in a specified directory. (This is in addition to using any search index created by Adobe Catalog—see step 3 below.)

To search within multiple PDF documents at once, perform the following steps (requires Adobe Reader version 6 or higher):

- 1 In Adobe Reader, select Edit | Search (or press CTRL+F).
- 2 In the text box, enter the word or phrase for which you want to search.
- 3 Select the **All PDF Documents in** option, and browse to select the folder in which you want to search.
- 4 Optionally, select one or more of the additional search options, such as **Whole words only** and **Case-Sensitive**.
- 5 Click the **Search** button.



NOTE Optionally, you can click the **Use Advanced Search Options** link near the lower right corner of the application window to enable additional, more powerful search options. (If this link says **Use Basic Search Options** instead, the advanced options are already enabled.) For details, see Adobe Reader's online help.

Accessing Online Help

The online help is the primary source of information about ChangeMan ZDD. The online help includes:

- Overviews of key elements within the application
- Detailed procedures for completing tasks
- Context-sensitive descriptions of fields and buttons


Viewing Help Topics

You can Help topics by clicking the Help button in the dialog box in which you are working. From there, you can do the following:

To	Do This
View a list of topics in the Contents	Click Contents .
Locate a topic in the Index	Click Index .
Locate an overview or procedure by searching on a word or words	Click Search .

Viewing Context-Sensitive Help

To view field-level help for an item in a dialog box:

- Click  and then click the field or button for which you want a description.
- or
- Position the cursor in the field and press F1.

Accessing Help for the ChangeMan Utilities

When you are using the ChangeMan Edit and ChangeMan Diff utilities, you can open the online Help by:

- Pressing F1 from anywhere in the screen.
- Holding the left or right mouse button down on a toolbar icon or menu command and pressing F1.

Chapter 1

Introduction

What is ChangeMan ZDD?

ChangeMan ZDD is a software infrastructure technology that simulates a network file system. It provides seamless access to data sets, jobs, and ChangeMan ZMF[®] components on a z/OS[®] system, from a Windows[®] platform. No special execution environment or programming interface is required. Data sets, job output, and ChangeMan ZMF components are accessed as though they were local files on your PC or files on a Windows network.

For a more detailed introduction to ChangeMan ZDD, see the *Serena[®] ChangeMan[®] ZDD User's Guide*.

What is Automation?

Automation is a technology that allows you to access the functionality of an application, such as ChangeMan ZDD, and use it in your own programs or scripts. Automation is based upon the *Component Object Model* (COM). COM is a standard software architecture that separates code into self-contained objects or components.

Using Automation, ChangeMan ZDD exposes its functionality as a set of programmable *objects*. Each object can be programmatically examined and controlled. Examples of ChangeMan ZDD objects are: *network*, *servers*, and *folders*.

Each object exposes a set of *properties* and *methods*. A *property* is an attribute of an object that can be set or retrieved. A *method* is a function that performs some action on an object. For a server object, examples of properties are *server name* or *IP address*; examples of methods are *logon* or *logoff*.

A special type of object is a *collection* object, which contains a set of other objects. A *servers* object is a collection of *server* objects, and a *folders* object is a collection of *folder* objects.

The ChangeMan ZDD Automation interface allows ChangeMan ZDD operations to be performed from Visual Basic®, C++, VBScript, JScript®, or any other language that supports COM objects. Following are some typical operations you can perform from a program or script:

- Configure ChangeMan ZDD for a new user (see ["Configuring ChangeMan ZDD for a New User" on page 63](#)).
- Submit JCL to a server (see ["Submitting JCL to a Server" on page 60](#)).
- Log on to a server (see ["Logging on to a Server" on page 56](#)).

In this document, examples are shown in both VBScript and JScript. Other languages may be used as well, but examples are not given.

Security

ChangeMan ZDD is compatible with RACF®, CA-ACF2®, and CA-Top Secret®.

Access to mainframe objects and functions is granted through your mainframe security system. You are required to provide your user ID and password in ChangeMan ZDD to connect to the mainframe.

The operation of ChangeMan ZDD does not affect the existing operation of either mainframe-based applications or PC network operations.

Compatibility

PC Requirements

- Windows® operating system (refer to the Readme for the supported versions)
- 10 megabytes (MB) of available disk space
- CD-ROM drive or access to a CD-ROM over a network
- VGA or higher-resolution display adapter
- Microsoft® Mouse or compatible pointing device

Mainframe Server Requirements

- ChangeMan ZDD server installed on the mainframe LPARs to be accessed by ChangeMan ZDD on your PC.
- IBM® z/OS® operating system (any version supported by IBM).
- TCP/IP must be installed and running.

ChangeMan ZMF Requirements

One of the following releases are required for accessing ChangeMan ZMF functionality from your program or script:

- ChangeMan ZMF 8.1 - any release
- ChangeMan ZMF 7.1 - any release
- ChangeMan ZMF 6.1 - any release

NOTE When using ChangeMan ZDD with earlier releases of ChangeMan ZMF, only the functionality supported within that ChangeMan ZMF release will be available.

Changes

A number of class names in ZDD's COM programming interface have been renamed so that they are now consistent with the .NET programming interface. This has been a source of confusion in the past.

These class names are primarily used to describe the ZDD COM interface in the documentation.

This has no impact on customer scripts or Visual Basic because these names are not used in scripting languages. The names would only need to be changed if you write a C++ program to invoke the COM interface.

The following class names have been renamed:

- ZosChangeManFolder --> ZosChangeManInstance
- ZosChangeManFolders --> ZosChangeManInstance
- ZosFileExtension --> ZosFileExtensionMapping
- ZosFileExtensions --> ZosFileExtensionMappings
- ZosDataType --> ZosFileFormatMapping
- ZosDataTypes --> ZosFileFormatMappings
- ZosFilters --> ZosNameFilters
- ZosLibType --> ZosLibypeMapping
- ZosLibTypes --> ZosLibTypeMappings
- ZosPrefix --> ZosPrefixMapping
- ZosPrefixes --> ZosPrefixMappings

In the event that someone is actually using C++ to invoke the COM interface, then they can either change the names above, or simply add the following definitions to the program:

```
#define ZosChangeManFolder ZosChangeManInstance
#define ZosChangeManFolders ZosChangeManInstance
#define ZosFileExtension ZosFileExtensionMapping
#define ZosFileExtensions ZosFileExtensionMappings
#define ZosDataType ZosFileFormatMapping
#define ZosDataTypes ZosFileFormatMappings
#define ZosFilters ZosNameFilters
#define ZosLibType ZosLibypeMapping
```



```
#define ZosLibTypes ZosLibTypeMappings  
#define ZosPrefix ZosPrefixMapping  
#define ZosPrefixes ZosPrefixMappings
```


Chapter 2

Using the Programming Interface

This chapter describes the ChangeMan ZDD object model and how to access ChangeMan ZDD functionality, using the Automation interface, from your own programs and scripts. Examples are shown in both VBScript and JScript.

See ["What is Automation?" on page 13](#) for more information.

Naming Conventions

The examples in this document use variable name prefixes to indicate the type of variable, as follows:

Prefix	Variable
obj	Object
str	String
var	Variant
n	Integer
b	Boolean

Connecting to ChangeMan ZDD

Connecting to ChangeMan ZDD is similar to connecting to any COM or ActiveX object:

For . . .	You would use . . .
Visual Basic or VBScript	CreateObject
JScript	new ActiveXObject
Visual C++	CoCreateInstance

For examples of connecting to ChangeMan ZDD, see ["ZosNetwork" on page 25](#).

Object Model



The following table summarizes the types of objects available in the ChangeMan ZDD object model:

Object	Description
ZosNetwork	Entire Serena™ Network. See "ZosNetwork" on page 25 .
ZoServers	Collection of all servers in the network. See "ZoServers" on page 28 .
ZosServer	A server. See "ZosServer" on page 30 .
ZosFileExtensionMappings	Collection of all file extension definitions for a server. See "ZosFileExtensionMappings" on page 34 .
ZosFileExtensionMapping	A file extension definition. See "ZosFileExtensionMapping" on page 35 .

Object	Description
ZosFileFormatMappings	Collection of file format mappings for a server or ChangeMan instance. See "ZosFileExtensionMappings" on page 34.
ZosFileFormatMapping	A file format mapping. See "ZosFileExtensionMapping" on page 35.
ZosLibypeMappings	Collection of all library type definitions for a server. See "ZosLibypeMappings" on page 38.
ZosLibypeMapping	A library type definition. See "ZosLibypeMapping" on page 40.
ZosDataSetProfiles	Collection of all data set profiles for a server. See "ZosDataSetProfiles" on page 41.
ZosDataSetProfile	A data set profile. See "ZosDataSetProfile" on page 43.
ZosJobFolders	Collection of all job folders with the same parent folder. See "ZosJobFolders" on page 44.
ZosJobFolder	A job folder. See "ZosJobFolder" on page 45.
ZosDataSetFolders	Collection of all data set folders with the same parent folder. See "ZosDataSetFolders" on page 47.
ZosDataSetFolder	A data set folder. See "ZosDataSetFolder" on page 48.
ZosChangeManInstances	Collection of all ChangeMan ZMF folders on the same server. See "ZosChangeManInstances" on page 49.
ZosChangeManInstance	A ChangeMan ZMF folder. See "ZosChangeManInstance" on page 49.
ZosNameFilters	Collection of all filters for a folder. See "ZosNameFilters" on page 51.

Object	Description
ZosPrefixMappings	Collection of all data set name prefix definitions for a folder. See "ZosPrefixMappings" on page 52.
ZosPrefixMapping	A data set name prefix definition. See "ZosPrefixMapping" on page 53.

The ChangeMan ZDD object model is illustrated in the following diagrams. The *ZosNetwork* object is always the starting point. All of the other objects are obtained as properties of another object. The arrows show how each object is obtained from another object.

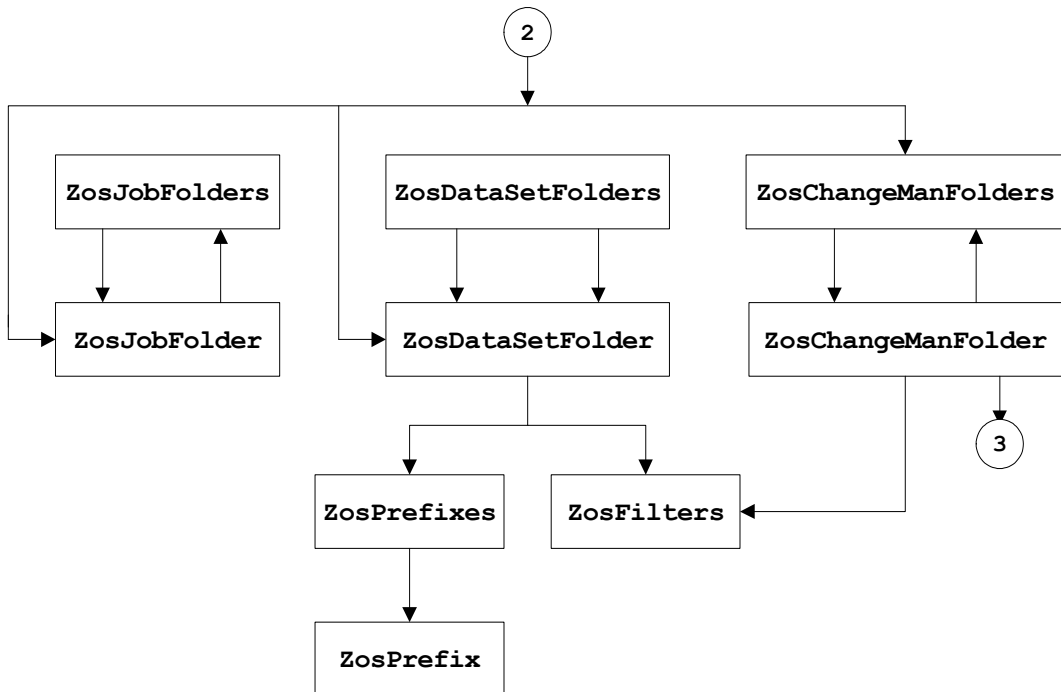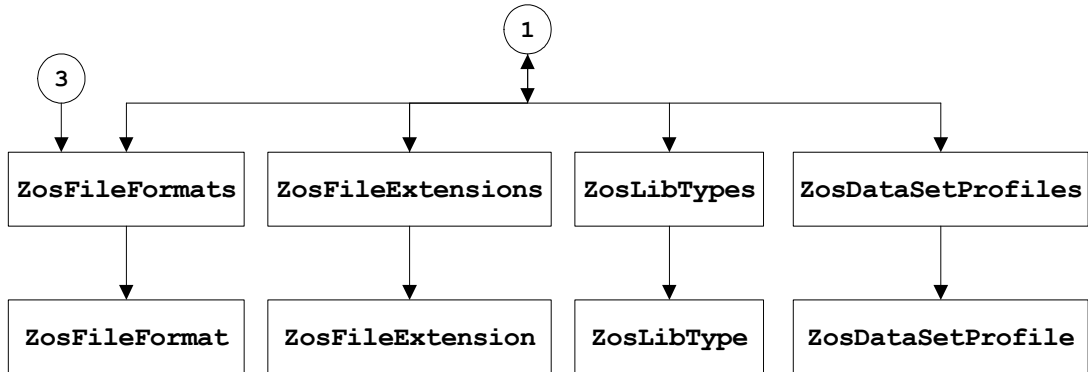

Collections

You can iterate through any of the collection objects in Visual Basic or VBScript using the "For Each...Next" statement, or in JScript using the "Enumerator" object:

Visual Basic or VBScript:

```
Dim objServers
  Dim objServer
  For Each objServer in objServers
    ...
  Next
```

JScript:

```
var objServers;
var objServer;
var objEnum;
objEnum = new Enumerator(objServers);
for (; !objEnum.atEnd(); objEnum.moveNext())
{
  objServer = objEnum.item();
  ...
}
```


ZosNetwork

The ZosNetwork object represents the overall Serena Network. ZosNetwork is always the starting point for ChangeMan ZDD Automation. It is created as follows:

Visual Basic or VBScript:

```
Dim objNetwork
    Set objNetwork = CreateObject("ZosCom.ZosNetwork")
```

JScript:

```
var objNetwork;
    objNetwork = new ActiveXObject("ZosCom.ZosNetwork");
```

The COM program ID used to access ChangeMan ZDD has changed to **ZosCom.ZosNetwork**. For backward compatibility, the old program ID of **ZosShell.Network** will still work. However, **ZosShell.ZosNetwork** has been deprecated, and you should begin using **ZosCom.ZosNetwork** instead.

ZosNetwork Properties

ZosNetwork exposes the following properties:

Property	Type	R/W	Description
Servers	Object (IZosServers)	R	Collection of all servers.
Server (strName)	Object (IZosServer)	R	Server with specified name.
CacheFolder	String	R/W	Name of folder used to store cached files.
CacheDays	Integer (long)	R/W	Number of days to keep cached files.

NotifyPort	Integer (long)	R/W	TCP/IP port number used to receive notification messages from the server. This port number should be unblocked on your local machine in the Windows firewall or other firewall software.
NotifyDelay	Integer (long)	R/W	Time delay, in seconds, before a message box is displayed. The time delay allows messages to accumulate so that several messages can be displayed in a single message box.
NotifyMessage Box	Boolean	R/W	Display message box for notify messages.
AsciiCodePage	Integer (long)	R/W	Windows code page number.
TimeOut	Integer (long)	R/W	Network timeout interval, in minutes. Network operations are aborted if no response is received after this period of time. Must be in the range 3 - 30 minutes.
KeepAlive	Integer (long)	R/W	TCP/IP keep alive time interval, in minutes. TCP/IP keep alive packets are sent after this many minutes of inactivity to detect lost connections.
MaxUploadSize	Integer (long)	R/W	Maximum upload file size, in megabytes. Setting this value too high can exhaust virtual storage and cause S878 abends in the server. Must be in the range 16 - 256 megabytes.

Examples of getting or setting network properties:

Visual Basic or VBScript:

```
Dim objNetwork
  Dim objServers
  Dim objServer
  Set objServers = objNetwork.Servers
  Set objServer = objNetwork.Server("SYSA")
  objNetwork.CacheFolder = "C:\Temp"
  objNetwork.CacheDays = 3
  objNetwork.NotifyPort = 4000
  objNetwork.NotifyDelay = 60
  objNetwork.NotifyMessageBox = True
  objNetwork.AsiiCodePage = 1252
```

JScript:

```
var objNetwork;
  var objServers;
  var objServer;
  objServers = objNetwork.Servers;
  objServer = objNetwork.Server("SYSA")
  objNetwork.CacheFolder = "C:\\Temp";
  objNetwork.CacheDays = 3;
  objNetwork.NotifyPort = 4000;
  objNetwork.NotifyDelay = 60;
  objNetwork.NotifyMessageBox = true;
  objNetwork.AsiiCodePage = 1252
```

ZoServers

The ZoServers object is a collection of all servers in the Serena Network. This object is obtained using the Servers property of the ZosNetwork object.

ZoServers Properties

ZoServers exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosServer)	R	Server with specified name or index.
Count	Integer (long)	R	Number of objects in collection.

ZoServers Methods

ZoServers exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (strName, strAddress, nPort, strDescription, nMaxSessions, bPasswordPhrase, bSecure)	Object (IZosServer)	Adds a new server. If you specify port number 0, the port will be disabled. The "DataSets", "Jobs", and "Unix" folders are not available if the port is disabled. If you specify bSecure, TLS security will be enabled for all ports, including ChangeMan ports
Remove (strName)		Deletes a server.

Examples of using ZosServers:

Visual Basic or VBScript:

```
Dim objServers
Dim objServer
Dim nCount
nCount = objServers.Count
Set objServer = objServers.Item("SYSA")
objServers.Add "Server1", "199.90.90.9", 5000,
"Description1"
objServers.Remove "Server1"
```

JScript:

```
var objServers;
var objServer;
var nCount;
nCount = objServers.nCount;
objServer = objServers. Item("SYSA")
objServers.Add("Server1", "199.90.90.9", 5000,
"Description1");
objServers.Remove("Server1");
```

ZosServer

The ZosServer object represents a single server. This object can be obtained using the Server property of ZosNetwork or the Item property of ZosServers.

ZosServer Properties

ZosServer exposes the following properties:

Property	Type	R/W	Description
Name	String	R	Name of the server.
Description	String	R/W	Server description (volume label).
Address	String	R/W	I/P address or DNS name.
Port	Integer (long)	R/W	XCH port number of server.
Secure	Boolean	R/W	Enables TLS security for all ports on this server, including ChangeMan ports.
PasswordPhrase	Boolean	R/W	Indicates whether password phrases (long passwords) are allowed.
DisablePort	Boolean	R/W	Disables XCH port. If the port is disabled, the "DataSets", "Jobs", and "Unix" folders are hidden and unavailable.
MaxSessions	Integer (short)	R/W	Maximum number of concurrent sessions.
User	String	R	User ID of currently logged on user.
DataSetFolder (strPath)	Object (IZosDataSetFolder)	R	Data set folder with specified path name (relative to "DataSets" share name).

Property	Type	R/W	Description
JobFolder (strPath)	Object (IZosJobFolder)	R	Job folder with specified path name (relative to "Jobs" share name).
ChangeManInstance (strName)	Object (IZosChangeManInstance)	R	ChangeMan ZMF folder with specified name.
EbcdicCodePage	Integer (long)	R/W	Server code page number.
ChangeManInstances	Object (IZosChangeManInstances)	R	Collection of all ChangeMan ZMF folders for server.
LibTypes	Object (IZosLibypeMappings)	R	Collection of all library types for server.
FileExtensions	Object (IZosFileExtensionMappings)	R	Collection of file extensions for server.
DataSetFileFormats	Object (IZosFileFormatMappings)	R	Collection of file format mappings for data sets
UnixFileFormats	Object (IZosFileFormatMappings)	R	Collection of file format mappings for Unix files. This property is available on version 7.1+ servers only.
DataSetProfiles	Object (IZosDataSetProfiles)	R	Collection of all data set profiles for server.
ChangeManFolder (strName)	Object (IZosChangeManInstance)	R	<i>Deprecated.</i> Use ChangeManInstance instead.
ChangeManFolders	Object (IZosChangeManInstances)	R	<i>Deprecated.</i> Use ChangeManInstances instead.
DataTypes	Object (IZosFileExtensionMappings)	R	<i>Deprecated.</i> Use DataSetFileFormats instead.

ZosServer Methods

ZosServer exposes the following methods:

Function	Returns	Description
Logon (strUserId, strPassword, strNewPassword)		Log on to server.
Logoff ()		Log off from server.
NotifyChange (strDataSetName, strMemberName)		Notifies file system driver that a data set or member has been created or deleted by an external process.
SubmitJcl (strFileName, bSuppressMessage, bNotify)		<p>Submit JCL to server.</p> <p>The bSuppressMessage parameter is optional. It is used to indicate whether message boxes should be suppressed. It is useful for running scripts in an automated tool where there is nobody present to press the OK button on a message box.</p> <p>To suppress message boxes, specify: bSuppressMessage = true</p> <p>To display message boxes, specify: bSuppressMessage = false</p> <p>If this parameter is not specified, it defaults to false and message boxes will be displayed normally.</p> <p>The bNotify parameter is optional. If bNotify is set to true, a notify job step will be added to the submitted job. The notify step will send you a message listing the return code for the job.</p>

Examples of using ZosServer:

Visual Basic or VBScript:

```
Dim objServer
  Dim strUser
  strUser = objServer.User
  objServer.Address = "199.90.90.9"
  objServer.Logon "USR001", "password"
  objserver.NotifyChange "USR001.NEW.DATA", "MEMBER1"
  objServer.SubmitJcl "C:\JCL\Print.jcl"
```

JScript:

```
var objServer;
  var strUser;
  strUser = objServer.User
  objServer.Address = "199.90.90.9";
  objServer.Logon("USR001", "password");
  objserver.NotifyChange("USR001.NEW.DATA", "MEMBER1");
  objServer.SubmitJcl("C:\JCL\Print.jcl");
```

ZosFileExtensionMappings

The ZosFileExtensionMappings object is a collection of all file extension definitions for a server. This object is obtained using the FileExtensions property of the ZosServer object.

ZosFileExtensionMappings Properties

ZosFileExtensionMappings exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosFileExtension Mapping)	R	File extension definition with specified index or data set name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosFileExtensionMappings Methods

ZosFileExtensionMappings exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (nIndex, strDataSetName, strFileExtension)	Object (IZosFileExtension Mapping)	Adds a new file extension definition. Index indicates position for new item. Specify -1 to insert at end.
Remove (varIndex)		Deletes a file extension, specified by index or data set name pattern.
Move (nIndexTo, nIndexFrom)		Changes the order of file extension definitions.

ZosFileExtensionMapping

The ZosFileExtensionMapping object represents a single file extension definition. This object can be obtained using the Item property of ZosFileExtensionMappings.

ZosFileExtensionMapping Properties

ZosFileExtensionMapping exposes the following properties:

Property	Type	R/W	Description
DataSetName	String	R	Data set name pattern.
FileExtension	String	R	File extension.

ZosFileFormatMappings

The ZosFileFormatMappings object is a collection of file format definitions for a server or ChangeMan instance. This object is obtained using the DataSetFileFormats property or the UnixFileFormats property of the ZosServer object. For ChangeMan instances, it can be obtained using the FileFormats property of the ZosChangeManInstance object.

ZosFileFormatMappings Properties

ZosFileFormatMappings exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosFileFormat Mapping)	R	File format definition with specified index or name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosFileFormatMappings Methods

ZosFileFormatMappings exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (nIndex, strName, strFileFormat)	Object (IZosFileFormatMapping)	Adds a new file format definition. File format can be: "AT" (ASCII Text) "AD" (ASCII Data) "ET" (EBCDIC Text) "ED" (EBCDIC Data) "UT" (UNICODE Text) "VT" (UTF-8 Text) "B" (Binary) "BT" (Binary CRLF) Index indicates position for new item. Specify -1 to insert at end.
Remove (varIndex)		Deletes a file format, specified by index or name pattern.
Move (nIndexTo, nIndexFrom)		Changes the order of file format definitions.

Examples of using ZosFileFormatMappings:

Visual Basic or VBScript:

```
Dim objFileFormats
objFileFormats.Add -1, "**.BINARY", "B"
objFileFormats.Remove "**.TRASH"
objFileFormats.Move 4,2
```

JScript:

```
var objFileFormats;
objFileFormats.Add(-1, "**.BINARY", "B");
objFileFormats.Remove("**.TRASH");
objFileFormats.Move(4,2);
```

ZosFileFormatMapping

The ZosFileFormatMapping object represents a single file format definition. This object can be obtained using the Item property of ZosFileFormatMappings.

ZosFileFormatMapping Properties

ZosFileFormatMapping exposes the following properties:

Property	Type	R/W	Description
Name	String	R	Name pattern.
FileFormat	String	R	File format: "AT" (ASCII Text) "AD" (ASCII Data) "ET" (EBCDIC Text) "ED" (EBCDIC Data) "UT" (UNICODE Text) "VT" (UTF-8 Text) "B" (Binary) "BT" (Binary CRLF)
DataSetName	String	R	<i>Deprecated</i> : Use Name property.
DataType	String	R	<i>Deprecated</i> : Use FileFormat property.

Examples of using ZosFileFormatMapping:

Visual Basic or VBScript:

```
Dim objFileFormat
  Dim strName
  Dim strDataType
  strName = objFileFormat.DataSetName
  strDataType = objFileFormat.DataType
```

JScript:

```
var objFileFormat;
  var strName;
  var strDataType;
  strName = objFileFormat.DataSetName;
  strDataType = objFileFormat.DataType;
```

ZosLibypeMappings

The ZosLibypeMappings object is a collection of all library type definitions for a server. This object is obtained using the LibTypes property of the ZosServer object. Library types only need to be defined if you are using Librarian or Panvalet libraries.

ZosLibypeMappings Properties

ZosLibypeMappings exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosLibypeM apping)	R	Library type definition with specified index or data set name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosLibypeMappings Methods

ZosLibypeMappings exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (nIndex, strDataSetName, strDataType)	Object (IZosLibypeMapping)	Adds a new library type definition. Library type can be "S" (Standard), "L" (Librarian), or "P" (Panvalet). Index indicates position for new item. Specify -1 to insert at end.
Remove (varIndex)		Deletes a library type, specified by index or data set name pattern.
Move (nIndexTo, nIndexFrom)		Changes the order of library type definitions.

Examples of using ZosLibypeMappings:

Visual Basic or VBScript:

```
Dim objLibTypes
objLibTypes.Add -1, "**.PANVALET", "P"
ObjLibTypes.Remove "**.LIBRARY"
ObjLibTypes.Move 4,2
```

JScript:

```
var objLibTypes;
objLibTypes.Add(-1, "**.PANVALET", "P");
ObjLibTypes.Remove("**.LIBRARY");
ObjLibTypes.Move(4,2);
```

ZosLibypeMapping

The ZosLibypeMapping object represents a single library type definition. This object can be obtained using the Item property of ZosLibypeMappings.

ZosLibypeMapping Properties

ZosLibypeMapping exposes the following properties:

Property	Type	R/W	Description
DataSetName	String	R	Data set name pattern.
LibType	String	R	Library type: "S" (Standard), "L" (Librarian), or "P" (Panvalet).

Examples of using ZosLibypeMapping.

Visual Basic or VBScript:

```
Dim objLibType
  Dim strDataSetName
  Dim strLibType
  strDataSetName = objLibType.DataSetName
  strLibType = objLibType.LibType
```

JScript:

```
var objLibType;
  var strDataSetName;
  var strLibType;
  strDataSetName = objLibType.DataSetName;
  strLibType = objLibType.LibType;
```

ZosDataSetProfiles

The ZosDataSetProfiles object is a collection of all data set profiles for a server. This object is obtained using the DataSetProfiles property of the ZosServer object.

ZosDataSetProfiles Properties

ZosDataSetProfiles exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosDataSetProfile)	R	Data set profile with specified index or data set name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosDataSetProfiles Methods

ZosDataSetProfiles exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.

<p>Add (nIndex, strDataSetName, strDataSetType, strRecordFormat, nRecordLength, nBlockSize, strDataClass, strStorageClass, strManagementClass, strSpaceUnit, nPrimarySpace, nSecondarySpace, nDirectoryBlocks, strUnitName, strVolume, nPdseVersion, MaxGens)</p>	<p>Object (IZosDataSetProfile)</p>	<p>Adds a new data set profile. Data set type can be "SEQ", "PDS", or "PDSE". Space unit can be "CYL", "TRK", or "BLK". Index indicates position for new item. Specify -1 to insert at end.</p>
<p>Remove (varIndex)</p>		<p>Deletes a data set profile, specified by index or data set name pattern.</p>
<p>Move (nIndexTo, nIndexFrom)</p>		<p>Changes the order of data set profiles.</p>

ZosDataSetProfile

The ZosDataSetProfile object represents a single file extension definition. This object can be obtained using the Item property of ZosDataSetProfiles.

ZosDataSetProfile Properties

ZosDataSetProfile exposes the following properties:

Property	Type	R/W	Description
DataSetName	String	R	Data set name pattern.
DataSetType	String	R	Data set type: "SEQ", "PDS", or "PDSE".
RecordFormat	String	R	Record format.
RecordLength	Integer (short)	R	Record length.
BlockSize	Integer (short)	R	Block size.
DataClass	String	R	SMS data class.
StorageClass	String	R	SMS storage class.
ManagementClass	String	R	SMS management class.
SpaceUnit	String	R	Space unit: "CYL", "TRK", or "BLK".
PrimarySpace	Integer (long)	R	Primary space quantity.
SecondarySpace	Integer (long)	R	Secondary space quantity.
DirectoryBlocks	Integer (long)	R	PDS directory blocks.
UnitName	String	R	Unit name.
Volume	String	R	Volume serial number.

PdseVersion	Integer (short)	R	PDSE version number: 0 (default), 1, 2
MaxGens	Integer (long)	R	Maximum number of PDSE member generations

ZosJobFolders

The ZosJobFolders object is a collection of all job folders with the same parent folder. This object is obtained using the Subfolders property of the ZosJobFolder object.

ZosJobFolders Properties

ZosJobFolders exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosJobFolder)	R	Folder with specified name or index.
Count	Integer (long)	R	Number of objects in collection.

ZosJobFolders Methods

ZosJobFolders exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.

Add (strFolderName, strQueryType, strQueryArg)	Object (IZosJobFolder)	Adds a new folder. Query type can be "QN" (name), "QP" (prefix), "AP" (active prefix), "AU" (active userid), or "A" (all active). Search argument is job name, prefix, or userid. Default argument is logged-on userid.
Remove (strFolderName)		Deletes a folder.

ZosJobFolder

The ZosJobFolder object represents a single job folder. This object can be obtained using the JobFolder property of ZosServer or the Item property of ZosJobFolders.

ZosJobFolder Properties

ZosJobFolder exposes the following properties:

Property	Type	R/W	Description
Name	String	R	Name of the folder.
Path	String	R	Full path name of the folder.
Subfolders	Object (IZosJobFolders)	R	Collection of all subfolders for this folder.
QueryType	String	R/W	Type of job query. Can be "QN" (name), "QP" (prefix), "AP" (active prefix), "AU" (active userid), or "A" (all active).
QueryArgument	String	R/W	Query search argument is job name, prefix, or userid. Default argument is logged-on userid.

ZosDataSetFolders

The ZosDataSetFolders object is a collection of all data set folders with the same parent folder. This object is obtained using the Subfolders property of the ZosDataSetFolder object.

ZosDataSetFolders Properties

ZosDataSetFolders exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosDataSetFolder)	R	Folder with specified name or index.
Count	Integer (long)	R	Number of objects in collection.

ZosDataSetFolders Methods

ZosDataSetFolders exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (strFolderName)	Object (IZosDataSetFolder)	Adds a new folder.
Remove (strFolderName)		Deletes a folder.

ZosDataSetFolder

The ZosDataSetFolder object represents a single data set folder. This object can be obtained using the DataSetFolder property of ZosServer or the Item property of ZosDataSetFolders.

ZosDataSetFolder Properties

ZosDataSetFolder exposes the following properties:

Property	Type	R/W	Description
Name	String	R	Name of the folder.
Path	String	R	Full path name of the folder.
Subfolders	Object (IZosDataSetFolders)	R	Collection of all subfolders for this folder.
Filters	Object (IZosNameFilters)	R	Collection of all data set name filters for folder.
MemberFilters	Object (IZosNameFilters)	R	Collection of member name filters for libraries under this folder.
Prefixes	Object (IZosPrefixMappings)	R	Collection of all data set name prefixes for folder.

ZosChangeManInstances

The ZosChangeManInstances object is a collection of all ChangeMan ZMF folders for a server. This object is obtained using the ChangeManInstances property of the ZosServer object.

ZosChangeManInstances Properties

ZosChangeManInstances exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosChangeManInstance)	R	Folder with specified name or index.
Count	Integer (long)	R	Number of objects in collection.

ZosChangeManInstances Methods

ZosChangeManInstances exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (strName, nPort, strDescription)	Object (IZosChangeManInstance)	Adds a new ChangeMan ZMF instance folder.
Remove (strName)		Deletes a ChangeMan ZMF instance folder.

ZosChangeManInstance

The ZosChangeManInstance object represents a single ChangeMan ZMF folder. This object can be obtained using the ChangeManInstance property of ZosServer or the Item property of ZosChangeManInstances.

ZosChangeManInstance Properties

ZosChangeManInstance exposes the following properties:

Property	Type	R/W	Description
Name	String	R	Name of the folder.
Path	String	R	Full path name of the folder.
Port	Integer (long)	R/W	I/P port number for ChangeMan ZMF instance
Description	String	R/W	ChangeMan ZMF description
Filters	Object (IZosNameFilters)	R	Collection of all application name filters for folder. Default is all applications.
FileFormats	Object (IZosFileFormatMappings)	R	Collection of file format mappings for ChangeMan ZMF components

ZosChangeManInstance Methods

ZosChangeManInstance exposes the following methods:

Function	Returns	Description
SubmitXml (strInputFileName, strOutputFileName, bSuppressMessage)		<p>Submits an XML request to the XML Services processor (for ChangeMan services).</p> <p>The bSuppressMessage parameter is optional. It is used to indicate whether message boxes should be suppressed. It is useful for running scripts in an automated tool where there is nobody present to press the OK button on a message box.</p> <p>To suppress message boxes, specify: bSuppressMessage = true</p> <p>To display message boxes, specify: bSuppressMessage = false</p> <p>If this parameter is not specified, it defaults to false and message boxes will be displayed normally.</p>

ZosNameFilters

The ZosNameFilters object is a collection of all name filters for a folder. This object is obtained using the Filters property of the ZosDataSetFolder object or the Filters property of the ZosChangeManInstance object.

ZosNameFilters Properties

ZosNameFilters exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	String	R	Filter with specified index or data set name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosNameFilters Methods

ZosNameFilters exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (strDataSetName)		Adds a new file extension definition.
Remove (varIndex)		Deletes a filter, specified by index or data set name pattern.

ZosPrefixMappings

The ZosPrefixMappings object is a collection of all data set name prefix definitions for a folder. This object is obtained using the Prefixes property of the ZosDataSetFolder object.

ZosPrefixMappings Properties

ZosPrefixMappings exposes the following properties:

Property	Type	R/W	Description
Item (varIndex)	Object (IZosPrefixMapping)	R	Prefix definition with specified index or data set name pattern.
Count	Integer (long)	R	Number of objects in collection.

ZosPrefixMappings Methods

ZosPrefixMappings exposes the following methods:

Function	Returns	Description
Refresh ()		Refreshes collection.
Add (nIndex, strDataSetName, strPrefix)	Object (IZosPrefixMapping)	Adds a new prefix definition. Index indicates position for new item. Specify -1 to insert at end.
Remove (varIndex)		Deletes a prefix definition, specified by index or data set name pattern.
Move (nIndexTo, nIndexFrom)		Changes the order of prefix definitions.

ZosPrefixMapping

The ZosPrefixMapping object represents a single prefix definition. This object can be obtained using the Item property of ZosPrefixMappings.

ZosPrefixMapping Properties

ZosPrefixMapping exposes the following properties:

Property	Type	R/W	Description
DataSetName	String	R	Data set name pattern.
Prefix	String	R	Data set name prefix.

Chapter 3

Examples

Overview

Several sample scripts are included with ChangeMan ZDD that illustrate how to use the Automation interface to perform some common ChangeMan ZDD operations. They are in the *Samples* folder, under the folder where ChangeMan ZDD is installed on your PC; they are in both VBScript and JScript.

The following scripts are described in this chapter.

Script Description	Page
Logging on to a Server	56
Submitting JCL to a Server	60
Configuring ChangeMan ZDD for a New User	63

This chapter also contains an example of how to use the Windows Task Scheduler to schedule your programs and scripts to run at specified times. See "[Using Windows Task Scheduler](#)" on page 76.

Logging on to a Server

You can use the **Logon** method (function) from your program or script to log on to a z/OS server. An example of when you would use **Logon** is when your program or script is accessing a data set on a z/OS server.

The following scripts illustrate how to log on to a z/OS server.

In VBScript

```
'*****  
'*****  
' File Name: Logon.vbs  
,  
' Description: Log on to server. If userid and password  
' not specified,  
' user will be prompted.  
,  
' Usage: Logon.vbs <server> [<userid>] [<password>]  
' [<newpassword>]  
'*****  
'*****  
  
Dim strServerName  
Dim strUserId  
Dim strPassword  
Dim strNewPassword  
  
Dim objNetwork  
Dim objServer  
  
'-----  
' Get command line arguments  
'-----  
  
If WScript.Arguments.Count < 1 Then  
    WScript.Echo "Usage: Logon.vbs <server> [<userid>]  
    [<password>] _ [<newpassword>]"  
    WScript.Quit(1)
```



```
End If

strServerName = WScript.Arguments(0)

If WScript.Arguments.Count > 1 Then
    strUserId = WScript.Arguments(1)
Else
    strUserId = ""
End If

If WScript.Arguments.Count > 2 Then
    strPassword = WScript.Arguments(2)
Else
    strPassword = ""
End If

If WScript.Arguments.Count > 3 Then
    strNewPassword = WScript.Arguments(3)
Else
    strNewPassword = ""
End If
```

```
End If
```

```
'-----  
' Log on to server  
'-----
```

```
Set objNetwork = CreateObject("ZosCom.ZosNetwork")  
Set objServer = objNetwork.Server(strServerName)
```

```
objServer.Logon strUserId, strPassword, strNewPassword
```

```
WScript.Echo "Logon: Server=" & strServerName, "UserId=" &  
strUserId
```

In JScript

```
/  
*****  
*****  
* File Name: Logon.js  
*  
* Description: Log on to server. If userid and password  
* not specified,  
* user will be prompted.  
*  
* Usage: Logon.js <server> [<userid>] [<password>]  
* [<newpassword>]  
*****  
*****/  
  
var strServerName;  
var strUserId;  
var strPassword;  
var strNewPassword;  
  
var objNetwork;  
var objServer;  
  
////////////////////////////////////  
// Get command line arguments  
////////////////////////////////////
```

```
if (WScript.Arguments.Count() < 1)
{
    WScript.Echo("Usage: Logon.js <server> [<userid>
        [<password>] _[<newpassword>]");
    WScript.Quit(1);
}

strServerName = WScript.Arguments(0);

if (WScript.Arguments.Count() > 1)
{
    strUserId = WScript.Arguments(1);
}
else
{
    strUserId = "";
}

if (WScript.Arguments.Count() > 2)
{
    strPassword = WScript.Arguments(2);
}
else
{
    strPassword = "";
}

if (WScript.Arguments.Count() > 3)
{
    strNewPassword = WScript.Arguments(3);
}
else
{
    strNewPassword = "";
}
```

```
}  
  
////////////////////  
// Log on to server  
////////////////////  
  
objNetwork = new ActiveXObject("ZosCom.ZosNetwork");  
objServer = objNetwork.Server(strServerName);  
  
objServer.Logon(strUserId, strPassword, strNewPassword);  
  
WScript.Echo("Logon: Server=" + strServerName, "UserId=" +  
strUserId);
```

Submitting JCL to a Server

You can use the **SubmitJCL** method (function) from your program or script to submit JCL to a z/OS server. A situation where you might use **SubmitJCL** is when a program or script, that runs from Windows Task Scheduler, needs to submit a nightly batch job to a z/OS server.

The following scripts illustrate how to submit JCL to a z/OS server.

In VBScript

```
'*****  
'*****  
' File Name:   SubmitJcl.vbs  
' Description: Submit a JCL file to a server.  
' Usage:      SubmitJcl.vbs <server> <file.name>  
'*****  
'*****  
  
Dim strServerName  
Dim strFileName  
  
Dim objNetwork  
Dim objServer  
  
Dim bSuppressMessage  
  
'-----  
' Get command line arguments  
'-----  
  
If WScript.Arguments.Count < 2 Then  
    WScript.Echo "Usage: SubmitJcl.vbs <server>  
    <file.name>"  
    WScript.Quit(1)
```

```
End If

strServerName = WScript.Arguments(0)
strFileName = WScript.Arguments(1)

'-----
' Submit JCL
'-----

Set objNetwork = CreateObject("ZosCom.ZosNetwork")
Set objServer = objNetwork.Server(strServerName)

bSuppressMessage = False

objServer.SubmitJcl strFileName, bSuppressMessage

WScript.Echo "Jcl submitted: Server=" & strServerName, _
            "FileName=" & strFileName
```

In JScript

```
/
*****
*****
* File Name:   SubmitJcl.js
* Description: Submit a JCL file to a server.
* Usage:      SubmitJcl.js <server> <file.name>
*****
*****/

var strServerName;
var strFileName;

var objNetwork;
var objServer;

var bSuppressMessage;

////////////////////
// Get command line arguments
////////////////////
```

```
if (WScript.Arguments.Count() < 2)
{
    WScript.Echo("Usage: SubmitJcl.js <server>
                <file.name>");
    WScript.Quit(1);
}
strServerName = WScript.Arguments(0);
strFileName = WScript.Arguments(1);

//////////
// Submit JCL
//////////

objNetwork = new ActiveXObject("ZosCom.ZosNetwork");
objServer = objNetwork.Server(strServerName);

bSuppressMessage = false;

objServer.SubmitJcl(strFileName bSuppressMessage);

WScript.Echo("Jcl submitted: Server=" + strServerName,
            "FileName=" + strFileName);
```

Configuring ChangeMan ZDD for a New User

To simplify the setup of ChangeMan ZDD for multiple desktops, you can write a script to automate many of the configuration tasks. Then, a new user can configure ChangeMan ZDD for their own desktop simply by executing the script.

The following scripts illustrate how the configuration tasks can be performed.

In VBScript

```
'*****  
'*****  
' File Name:   NewConfig.vbs  
'  
' Description: Sample for creating a new configuration.  
'  
' Usage:      NewConfig.vbs <userid>  
'  
' Copyright ©2003-2011, Serena Software. Licensed  
' material. All rights reserved.  
'*****  
'*****  
  
Dim userID  
  
Dim network  
Dim servers  
Dim server  
Dim fileFormats  
Dim libTypes  
Dim fileExtensions  
Dim dsProfiles  
Dim folders  
Dim folder  
Dim subfolders  
Dim subfolder  
Dim filters  
Dim members  
Dim prefixes  
  
'-----  
' Get command line arguments  
'-----  
  
If WScript.Arguments.Count < 1 Then  
    WScript.Echo "Usage: NewConfig.vbs <userid>"  
    WScript.Quit(1)  
End If  
  
userID = WScript.Arguments(0)
```



```

'-----
' Update network properties
'-----

Set network = CreateObject("ZosCom.ZosNetwork")

network.CacheFolder = "C:\Temp"
network.CacheDays = 3
network.NotifyPort = 8000
network.NotifyMessageBox = True

'-----
' Add the new servers
'-----

Set servers = network.Servers

servers.Add "Server1", "172.20.20.1", 5000, 1140,
"Description1"
servers.Add "Server2", "172.20.20.2", 5000, 1140,
"Description2"
servers.Add "Server3", "172.20.20.3", 5000, 1140,
"Description3"

'-----
' Update the properties for each server
'-----

For Each server In servers

'-----
' Add the data type entries
'-----

Set fileFormats = server.DataSetFileFormats

fileFormats.Add -1, "**.ASCII.TEXT", "AT"
fileFormats.Add -1, "**.ASCII.DATA", "AD"
fileFormats.Add -1, "**.UNICODE.TEXT", "UT"
fileFormats.Add -1, "**.EBCDIC.TEXT", "ET"
fileFormats.Add -1, "**.EBCDIC.DATA", "ED"
fileFormats.Add -1, "**.BINARY", "BT"

```

```
'-----  
'-----  
' Add the Unix file format entries  
' This is supported on version 7.1+ servers only.  
' The lines below should be removed for back level  
servers.  
'-----  
'-----  
  
Set fileFormats = server.UnixFileFormats  
  
fileFormats.Add -1, "*.TEXT", "AT"  
fileFormats.Add -1, "*.UTEXT", "UT"  
fileFormats.Add -1, "*.BIN", "B"  
  
'-----  
' Add the library type entries  
'-----  
  
Set libTypes = server.LibTypes  
  
libTypes.Add -1, "**.LIBRARY", "L"  
libTypes.Add -1, "**.PANVALET", "P"  
  
'-----  
' Add the file extension entries  
'-----  
  
Set fileExtensions = server.FileExtensions  
  
fileExtensions.Add -1, "**.CNTL", "jcl"  
fileExtensions.Add -1, "**.COBOL", "cbl"  
fileExtensions.Add -1, "**.LIST", "txt"  
fileExtensions.Add -1, "**.WORD", "doc"  
fileExtensions.Add -1, "**.EXCEL", "xls"  
  
'-----  
' Add the profiles for new data sets  
'-----  
  
Set dsProfiles = server.DataSetProfiles  
  
dsProfiles.Add -1, "**.DATA", "SEQ", "FB", 80, 0,  
"DATACLS1", "STORCLS1", "MGMTCLS1", "TRK", 2, 1, 5,
```

```
"SYSDA", "VOL001"
dsProfiles.Add -1, "**.TEMP", "SEQ", "FB", 80, 0,
"DATACLS2", "STORCLS2", "MGMTCLS2", "CYL", 2, 1, 5,
"SYSDA", "VOL002"
dsProfiles.Add -1, "**.LIST", "SEQ", "VB", 80, 0, "",
"", "", "BLK", 500, 50, 5, "SYSDA", ""
```

```
'-----
' Add data set folders
'-----
```

```
Set folder = server.DataSetFolder
Set subfolders = folder.Subfolders
```

```
'-----
' "My DataSets" folder for all user's data sets
'-----
```

```
Set subfolder = subfolders.Add("My DataSets")
```

```
Set filters = subfolder.Filters
Set prefixes = subfolder.Prefixes
```

```
filters.Add userID & ".*"
```

```
prefixes.Add -1, "**", userID
```

```
'-----
' "My Source" folder for user's source libraries
'-----
```

```
Set subfolder = subfolders.Add("My Source")
```

```
Set filters = subfolder.Filters
Set members = subfolder.MemberFilters
Set prefixes = subfolder.Prefixes
```

```
filters.Add userID & ".*.COBOL"
filters.Add userID & ".*.ASM"
```

```
members.Add "ABC*"
members.Add "X"
```

```
prefixes.Add -1, "**", userID
```

```
'-----  
' Add job folders  
'-----  
  
Set folder = server.JobFolder  
Set subfolders = folder.Subfolders  
  
'-----  
' "My Jobs" folder for jobs owned by user  
'-----  
  
subfolders.Add "My Jobs", "QU", userID  
  
'-----  
' "ChangeMan" folder for job names prefixed with "CMN"  
'-----  
  
subfolders.Add "ChangeMan", "QN", "CMN*"  
  
'-----  
' "Active" folder for all active jobs  
'-----  
  
subfolders.Add "Active", "A"  
  
'-----  
' Add ChangeMan folders  
'-----  
  
Set folders = server.ChangeManInstances  
  
folders.Add "ChangeMan-Prod", 3000, "Production  
ChangeMan"  
folders.Add "ChangeMan-Test", 3001, "Test ChangeMan"  
  
For Each folder In folders  
  
    '-----  
    ' Add the ChangeMan file format entries  
    '-----  
  
    Set fileFormats = folder.FileFormats
```

```
fileFormats.Add -1, "SRC", "AT"  
fileFormats.Add -1, "DOC", "UT"  
fileFormats.Add -1, "BIN", "BT"
```

Next

Next

In JScript

```
/
*****
*****
* File Name:   NewConfig.js
*
* Description: Sample for creating a new configuration.
*
* Usage:      NewConfig.js <userid>
*
* Copyright ©2003-2011, Serena Software. Licensed
material. All rights reserved.
*****
*****/

var userID;

var network;
var servers;
var server;
var fileFormats;
var libTypes;
var fileExtensions;
var dsProfiles;
var folders;
var folder;
var subfolders;
var subfolder;
var filters;
var members;
var prefixes;

var enumerator;

////////////////////////////////////
// Get command line arguments
////////////////////////////////////

if (WScript.Arguments.Count() < 1)
{
    WScript.Echo("Usage: NewConfig.js <userid>");
    WScript.Quit(1);
}
```

```

}

userID = WScript.Arguments(0);

////////////////////////////////////
// Update network properties
////////////////////////////////////

network = new ActiveXObject("ZosCom.ZosNetwork");

network.CacheFolder = "C:\\Temp";
network.CacheDays   = 3;
network.NotifyPort  = 8000;
network.NotifyMessageBox = true;

////////////////////////////////////
// Add the new servers
////////////////////////////////////

servers = network.Servers;

servers.Add("Server1", "172.20.20.1", 5000, 1140,
            "Description1");
servers.Add("Server2", "172.20.20.2", 5000, 1140,
            "Description2");
servers.Add("Server3", "172.20.20.3", 5000, 1140,
            "Description3");

////////////////////////////////////
// Update the properties for each server
////////////////////////////////////

serverEnum = new Enumerator(servers);

for (; !serverEnum.atEnd(); serverEnum.moveNext())
{
    server = serverEnum.item();

    //////////////////////////////////////
    // Add the data set file format entries
    //////////////////////////////////////

    fileFormats = server.DataSetFileFormats;

```

```
fileFormats.Add(-1, "**.ASCII.TEXT", "AT");
fileFormats.Add(-1, "**.ASCII.DATA", "AD");
fileFormats.Add(-1, "**.UNICODE.TEXT", "UT");
fileFormats.Add(-1, "**.EBCDIC.TEXT", "ET");
fileFormats.Add(-1, "**.EBCDIC.DATA", "ED");
fileFormats.Add(-1, "**.BINARY", "BT");

////////////////////////////////////
////////
// Add the Unix file format entries
// This is supported on version 7.1+ servers only.
// The lines below should be removed for back level
// servers.
////////////////////////////////////
////////

fileFormats = server.UnixFileFormats;

fileFormats.Add(-1, "*.TEXT", "AT");
fileFormats.Add(-1, "*.UTEXT", "UT");
fileFormats.Add(-1, "*.BIN", "B" );

////////////////////////////////////
// Add the library type entries
////////////////////////////////////

libTypes = server.LibTypes;

libTypes.Add(-1, "**.LIBRARY", "L");
libTypes.Add(-1, "**.PANVALET", "P");

////////////////////////////////////
// Add the file extension entries
////////////////////////////////////

fileExtensions = server.FileExtensions;

fileExtensions.Add(-1, "**.CNTL", "jcl");
fileExtensions.Add(-1, "**.COBOL", "cbl");
fileExtensions.Add(-1, "**.LIST", "txt");
fileExtensions.Add(-1, "**.WORD", "doc");
fileExtensions.Add(-1, "**.EXCEL", "xls");

////////////////////////////////////
```



```
// Add the profiles for new data sets
////////////////////////////////////

dsProfiles = server.DataSetProfiles;

dsProfiles.Add(-1, "**.DATA", "SEQ", "FB", 80, 0,
"DATACLS1", "STORCLS1", "MGMTCLS1", "TRK", 2, 1, 5,
"SYSDA", "VOL001");
dsProfiles.Add(-1, "**.TEMP", "SEQ", "FB", 80, 0,
"DATACLS2", "STORCLS2", "MGMTCLS2", "CYL", 2, 1, 5,
"SYSDA", "VOL002");
dsProfiles.Add(-1, "**.LIST", "SEQ", "VB", 80, 0, "",
"", "", "BLK", 500, 50, 5, "SYSDA", "");

////////////////////////////////////
// Add data set folders
////////////////////////////////////

folder = server.DataSetFolder;
subfolders = folder.Subfolders;

////////////////////////////////////
// "My DataSets" folder for all user's data sets
////////////////////////////////////

subfolder = subfolders.Add("My DataSets");

filters = subfolder.Filters;
prefixes = subfolder.Prefixes;

filters.Add(userID + ".*");

prefixes.Add(-1, "**", userID);

////////////////////////////////////
// "My Source" folder for user's source libraries
////////////////////////////////////

subfolder = subfolders.Add("Source");

filters = subfolder.Filters;
members = subfolder.MemberFilters;
prefixes = subfolder.Prefixes;
```

```
filters.Add(userID + "**.COBOL");
filters.Add(userID + "**.ASM");

members.Add("ABC*");
members.Add("X*");

prefixes.Add(-1, "**", userID);

////////////////////////////////////
// Add job folders
////////////////////////////////////

folder = server.JobFolder;
subfolders = folder.Subfolders;

////////////////////////////////////
// "My Jobs" folder for jobs owned by user
////////////////////////////////////

subfolder = subfolders.Add("My Jobs", "QU", userID);

////////////////////////////////////
//
// "ChangeMan" folder for job names prefixed with "CMN"
////////////////////////////////////
//

subfolder = subfolders.Add("ChangeMan", "QN", "CMN*");

////////////////////////////////////
// "Active" folder for all active jobs
////////////////////////////////////

subfolder = subfolders.Add("Active", "A");

////////////////////////////////////
// Add ChangeMan folders
////////////////////////////////////

folders = server.ChangeManInstances;

folders.Add("ChangeMan-Prod", 3000, "Production
ChangeMan");
folders.Add("ChangeMan-Test", 3001, "Test ChangeMan");
```

```
folderEnum = new Enumerator(folders);

for (; !folderEnum.atEnd(); folderEnum.moveNext())
{
    folder = folderEnum.item();

    //////////////////////////////////////
    // Add the ChangeMan file format entries
    //////////////////////////////////////

    fileFormats = folder.FileFormats;

    fileFormats.Add(-1, "SRC", "AT");
    fileFormats.Add(-1, "DOC", "UT");
    fileFormats.Add(-1, "BIN", "B");
}
}
```

Using Windows Task Scheduler

The Windows Task Scheduler allows you to schedule programs to run at specified times. For example, you can schedule nightly job cycles to run automatically.

The following example shows how to logon to a z/OS server and submit a job. This .bat file contains commands to execute scripts that use the **Logon** and **SubmitJCL** methods. For examples of these scripts, see ["Logging on to a Server" on page 56](#) and ["Submitting JCL to a Server" on page 60](#).

```
Rem This is a batch file that logs on to the z/OS Host.  
Rem After logging on, a JCL member on the Host is  
submitted.
```

```
C:\MyJobs\WSCRIPT Logon.vbs      HOSTNAME USERID  
                                PASSWORD  
C:\MyJobs\WSCRIPT SubmitJCL.vbs  
                                M:\USER999.CNTL.JCL\MYJOB
```

```
Say 'Your Job was Submitted'  
Pause
```

You can schedule this .bat file to run automatically using the Windows Task Scheduler. To access the Windows Task Scheduler:

- 1 Choose **Programs>Accessories>System Tools>Scheduled Tasks** from the Windows **Start** Menu. The **Scheduled Tasks** dialog box appears.
- 2 Click **Add Scheduled Task** and a wizard will guide you through the process.

Index

A

Adobe Acrobat 10
AsciiCodePage ZosNetwork property 26
Automation, described 13

B

bSuppressMessage parameter
 example 60
 using with SubmitJcl function 32
 using with SubmitXml function 50

C

CacheDays ZosNetwork property 25
CacheFolder ZosNetwork property 25
ChangeMan ZDD
 connecting to 20
collection objects 24
COM 13
compatibility 15
 system requirements 15
Component Object Model 13
concepts, ChangeMan ZDD 13
connecting to ChangeMan ZDD 20
 examples 25
conventions
 naming 19

D

documents related to ChangeMan ZDD 10

E

examples of using the programming
 interface 55
 logging on to a z/OS server 56
 new configuration 63
 submitting JCL to a z/OS server 60,
 76
 using Windows Task Scheduler 76

H

help, online 11

L

logging on to a z/OS server
 example 56

M

mainframe server requirements 15
message boxes
 suppressing 32, 50
methods 13
model
 object diagram 23
 object table 20

N

naming conventions 19
new configuration
 example 63
NotifyDelay ZosNetwork property 26

NotifyMessageBox ZosNetwork property
26

NotifyPort ZosNetwork property 26

O

object

- collection 24

- methods 13

- properties 13

- ZosChangeManFolder 49

- ZosChangeManFolders 44

- ZosDataSetFolder 48

- ZosDataSetFolders 44

- ZosDataSetProfile 43

- ZosDataSetProfiles 41

- ZosDataType 37, 38

- ZosDataTypes 34

- ZosFileExtension 35

- ZosFileExtensions 41

- ZosFilters 51

- ZosJobFolder 45

- ZosJobFolders 44

- ZosLibType 40

- ZosLibTypes 38

- ZosNetwork 25

- ZosPrefix 53

- ZosPrefixes 52

- ZosServer 30

- ZoServers 28

object model

- diagrams 23

- table 20

objects 13

online documentation 10

online help 11

P

PC requirements 15

properties 13

R

README, ChangeMan ZDD 7

related documents, ChangeMan ZDD 10

requirements

- mainframe server 15

- PC 15

- system 15

S

Scheduled Tasks, Windows 76

security 14

Server ZosNetwork property 25

Servers ZosNetwork property 25

SubmitJcl function

- bSuppressMessage parameter 32

submitting JCL to a z/OS server

- example 60, 76

- using Windows Task Scheduler 76

SubmitXml function

- bSuppressMessage parameter 50

suppressing message boxes 32, 50

system requirements 15

T

Task Scheduler

- Windows 76

U

usage examples 55

- logging on to a z/OS server 56

- new configuration 63

- submitting JCL to a z/OS server 60,
76

- using Windows Task Scheduler 76

W

- Windows
 - using Scheduled Tasks with ChangeMan ZDD 76
- Windows Task Scheduler 76

Z

- ZosChangeManFolder
 - methods 50
 - object 49
 - properties 50
- ZosChangeManFolders
 - methods 49
 - object 49
 - properties 49
- ZosDataSetFolder
 - object 48
 - properties 48
- ZosDataSetFolders
 - methods 47
 - object 44
 - properties 47
- ZosDataSetProfile
 - object 43
 - properties 43
- ZosDataSetProfiles
 - methods 41
 - object 41
 - properties 41
- ZosDataType
 - examples 38
 - object 37, 38
 - properties 37
- ZosDataTypes
 - examples 36, 38
 - methods 36
 - object 34
 - properties 35
- ZosFileExtension
 - object 35
 - properties 35
- ZosFileExtensions
 - methods 34
 - object 41
 - properties 34
- ZosFilters
 - methods 51
 - object 51
 - properties 51
- ZosJobFolder
 - object 45
 - properties 46
- ZosJobFolders
 - methods 44
 - object 44
 - properties 44
- ZosLibType
 - examples 40
 - object 40
 - properties 40
- ZosLibTypes
 - examples 39
 - methods 39
 - object 38
 - properties 38
- ZosNetwork
 - examples 27
 - object 25
 - properties 25
- ZosNetwork Properties
 - AsciiCodePage 26
 - CacheDays 25
 - CacheFolder 25
 - NotifyDelay 26
 - NotifyMessageBox 26
 - NotifyPort 26
 - Server 25
 - Servers 25
- ZosPrefix
 - object 53
 - properties 53
- ZosPrefixes
 - methods 52
 - object 52
 - properties 52

ZosServer

- examples 33
- methods 32
- object 30
- properties 30

ZosServers

- examples 29
- methods 28
- object 28
- properties 28