



Micro Focus VisiBroker 8.5.4

VisiBroker for C++
API Reference Guide

Micro Focus
The Lawn
22-30 Old Bath Road
Newbury, Berkshire RG14 1QN
UK

<http://www.microfocus.com>

Copyright © Micro Focus 2009-2017. All rights reserved.

MICRO FOCUS, the Micro Focus logo and Micro Focus Licensing are trademarks or registered trademarks of Micro Focus Development Limited or its subsidiaries or affiliated companies in the United States, United Kingdom and other countries. All other marks are the property of their respective owners.

2017-01-25

Contents

Introduction to VisiBroker	1
Accessing VisiBroker online help topics in the standalone Help Viewer	1
Accessing VisiBroker online help topics from within a VisiBroker GUI tool	1
Documentation conventions	2
Platform conventions	2
Contacting Micro Focus	2
Further Information and Product Support	2
Information We Need	3
Contact information	3
Generated interfaces and classes	5
Generated interfaces and classes overview	5
<Interface_name>	5
<Interface_name>ObjectWrapper	5
POA<class_name>	6
tie<class_name>	6
<class_name>_var	6
Core interfaces and classes	7
PortableServer::AdapterActivator	7
IDL Definition	7
PortableServer::AdapterActivator methods	7
BindOptions	7
Include file	8
BindOptions members	8
BOA	9
Include file	9
CORBA::BOA methods	9
Deprecated methods	12
VisiBroker extensions to CORBA::BOA	13
CompletionStatus	13
IDL Definition	13
CompletionStatus members	14
Context	14
Include file	14
Context methods	14
PortableServer::Current	16
IDL Definition	16
PortableServer::Current methods	16
Exception	17
Include file	17
Object	17
Include file	17
CORBA::Object methods	17
VisiBroker extensions to CORBA::Object	19
ORB	22
Include file	22
CORBA::ORB methods	22
VisiBroker extensions to CORBA::ORB	28
PortableServer::POA	29
PortableServer::POA methods	29
PortableServer::POAManager	38
Include file	39
PortableServer::POAManager methods	39

Principal.....	41
Include file.....	41
Principal methods.....	41
PortableServer::RefCountServantBase.....	41
Include file.....	41
PortableServer::RefCountServantBase methods.....	41
PortableServer::ServantActivator.....	42
Include file.....	42
PortableServer::ServantActivator methods.....	42
PortableServer::ServantBase.....	43
Include file.....	43
PortableServer::ServantBase methods.....	43
PortableServer::ServantLocator.....	44
Include file.....	44
PortableServer::ServantLocator methods.....	44
PortableServer::ServantManager.....	45
Include file.....	45
SystemException.....	45
Include file.....	45
SystemException methods.....	46
UserException.....	47
Include file.....	48
UserException methods.....	48
UserException derived classes.....	48

Dynamic interfaces and classes 49

Any.....	49
Include file.....	49
Any methods.....	49
Insertion operators.....	50
Extraction operators.....	50
ContextList.....	51
ContextList methods.....	51
DynamicImplementation.....	53
DynamicImplementation methods.....	53
DynAny.....	53
Include file.....	54
Important usage restrictions.....	54
DynAny methods.....	54
Extraction methods.....	55
Insertion methods.....	56
DynAnyFactory.....	57
DynAnyFactory methods.....	57
DynArray.....	57
Important usage restrictions.....	57
DynArray methods.....	57
DynEnum.....	58
Important usage restrictions.....	58
DynEnum methods.....	58
DynSequence.....	59
Important usage restrictions.....	59
DynSequence methods.....	60
DynStruct.....	60
Important usage restrictions.....	60
DynStruct methods.....	60
DynUnion.....	61
Important usage restrictions.....	61

DynUnion methods	61
Environment	62
Include file	62
Environment methods	63
ExceptionList	63
ExceptionList methods	64
NamedValue	65
Include file	65
NamedValue methods	65
NVList	66
Include file	66
NVList methods	66
Request	69
Include file	69
Request methods	69
ServerRequest	72
Include file	73
ServerRequest methods	73
TCKind	75
TypeCode	76
Include file	76
TypeCode constructors	76
TypeCode methods	76

Interface repository interfaces and classes (C++) 81

AliasDef	81
AliasDef methods	81
ArrayDef	81
ArrayDef methods	81
AttributeDef	82
AttributeDef methods	82
AttributeDescription	83
AttributeDescription members	83
AttributeMode	83
AttributeMode values	83
ConstantDef	83
ConstantDef methods	84
ConstantDescription	84
ConstantDescription members	84
Contained	85
Include file	85
Contained methods	85
Container	86
Include file	87
Container methods	87
DefinitionKind	92
DefinitionKind values	92
Description	92
Description members	92
EnumDef	93
EnumDef methods	93
ExceptionDef	93
ExceptionDef methods	93
ExceptionDescription	94
ExceptionDescription members	94
FixedDef	94
Methods	94

FullInterfaceDescription.....	94
FullInterfaceDescription members	95
FullValueDescription.....	95
Variables.....	95
IDLType	96
Include file.....	96
IDLType methods	97
InterfaceDef	97
Include file.....	97
InterfaceDef methods	98
InterfaceDescription	99
InterfaceDescription members	99
IObject	100
Include file.....	100
IObject methods	100
ModuleDef.....	100
ModuleDescription	100
ModuleDescription members	100
NativeDef.....	101
OperationDef	101
Include file.....	101
OperationDef methods	102
OperationDescription	103
OperationDescription members	103
OperationMode.....	104
OperationMode values.....	104
ParameterDescription.....	104
ParameterDescription members.....	104
ParameterMode.....	104
ParameterMode values	104
PrimitiveDef.....	105
PrimitiveDef methods	105
PrimitiveKind	105
PrimitiveKind values	105
Repository	106
Include file.....	106
Repository methods.....	106
SequenceDef	107
SequenceDef methods	107
StringDef	108
StringDef methods	108
StructDef	108
StructDef methods	109
StructMember.....	109
StructMember methods.....	109
TypedefDef.....	109
TypeDescription	109
TypeDescription members	110
UnionDef.....	110
UnionDef methods.....	110
UnionMember	111
UnionMember members	111
ValueBoxDef.....	111
Methods.....	111
ValueDef	111
Methods.....	112
ValueDescription	114

Values	114
WstringDef	114
WStringDef methods	115
Activation interfaces and classes	117
ImplementationStatus	117
Include file	117
ImplementationStatus members	117
OAD	117
Include file	119
OAD methods	119
ObjectStatus	122
Include file	122
ObjectStatus members	122
ObjectStatusList	122
Include file	123
ObjectStatusList methods	123
Naming Service interfaces and classes (C++)	125
NamingContext	125
Include file	125
Code sample	125
NamingContext methods	126
NamingContextExt	130
Include file	130
Code sample	130
NamingContextExt methods	130
Binding and BindingList	132
Include file	132
Code sample	132
BindingIterator	132
Include file	132
Code sample	133
BindingIterator methods	133
NamingContextFactory	133
Include file	134
Code sample	134
Methods	134
ExtendedNamingContextFactory	135
Include file	135
Code sample	135
Methods	135
Event service interfaces and classes	137
ConsumerAdmin	137
IDL definition	137
ConsumerAdmin methods	137
EventChannel	137
IDL definition	138
Methods	138
EventChannelFactory	138
IDL definition	138
EventChannelFactory methods	139
ProxyPullConsumer	139
IDL definition	139
ProxyPushConsumer	140
IDL definition	140

ProxyPullSupplier	140
IDL definition.....	140
ProxyPushSupplier.....	140
IDL definition.....	141
PullConsumer	141
IDL definition.....	141
PushConsumer	141
IDL definition.....	141
PullSupplier	142
IDL definition.....	142
PullSupplier methods.....	142
PushSupplier	142
IDL definition.....	142
SupplierAdmin	143
IDL definition.....	143

Server Manager Interfaces and Classes 145

The Container Interface.....	145
Include file.....	145
The Container Interface	145
Methods related to property manipulation and queries	145
Methods related to operations.....	147
Methods related to children containers.....	147
Methods related to storage.....	148
The Storage Interface	149
Include file.....	149
Storage Interface Methods for C++	149

Transaction Service interfaces and classes 151

CosTransactions and VISTransactions modules.....	151
Looking at the CosTransactions module	151
Data types.....	151
Structures.....	152
Exceptions	153
Looking at the VISTransactions module	154
Current interface.....	154
Choosing a Current interface	154
Obtaining a Current object reference	156
Using the Current object reference	156
Is your VisiTransact Transaction Service instance available?	156
Checked behavior.....	157
Current methods.....	157
Status value definitions.....	160
TransactionalObject interface	167
TransactionFactory interface.....	168
TransactionFactory methods	169
Control interface	171
Terminator interface	172
Terminator methods	173
Coordinator interface	175
Coordinator methods.....	176
RecoveryCoordinator interface.....	182
RecoveryCoordinator methods	182
Resource interface.....	183
Resource methods.....	183
Synchronization interface	186
Synchronization methods	187

VITransactionService class.....	189
VITransactionService methods	189
Commands and arguments.....	190
Overview of VisiTransact commands	190
vbconsolew.....	190
ots	191
vshutdown.....	191
Command-line arguments for applications.....	192
Passing command-line arguments to ORB_init() using argc and argv ...	192
Arguments for applications that originate transactions	193
Arguments for applications with an embedded VisiTransact Transaction Service instance	194
Error codes	195
VisiTransact Transaction Manager common error codes	195
VisiTransact Transaction Service error codes	196
VisiTransact transaction log error codes	198

Native Messaging Interfaces and Classes for C++ 199

RequestAgent.....	199
Include File	199
IDL definition	199
RequestAgent Methods	200
create_request.....	200
poll.....	200
destroy_request	200
RequestDesc	201
Include File	201
IDL Definition.....	201
RequestDesc Fields	201
ReplyRecipient.....	202
Include File	202
ReplyRecipient methods.....	202
reply_available.....	202
REPLY_NOT_AVAILABLE	202
Include File	203
IDL definition	203
Property	203
Include File	203
IDL definition	203
Property Fields	203
PropertySeq	203
Include File	203
OctetSeq	204
Include File	204
RequestTag	204
Include File	204
RequestTagSeq	204
Include File	204
Cookie.....	204
Include File	204
DuplicatedRequestTag.....	205
Include File	205
PollingGroupIsEmpty	205
Include File	205
RequestNotExist	205
Include File	205

Portable Interceptor interfaces and classes for C++	207
About Interceptors	207
ClientRequestInfo	208
Include file	208
ClientRequestInfo methods	209
ClientRequestInterceptor	210
Include file	210
ClientRequestInterceptor methods	211
Codec	212
Include file	213
Codec Member Classes	213
Codec Methods	213
CodecFactory	214
Include file	214
CodecFactory Member	214
CodecFactory Method	214
Current	215
Include file	215
Current Methods	215
Encoding	216
Include file	216
Members	216
ExceptionList	216
Include file	217
ForwardRequest	217
Include file	217
Interceptor	217
Include file	217
Interceptor methods	217
IORInfo	218
Include file	218
IORInfo Methods	218
IORInfoExt	220
Include file	220
IORInfoExt Methods	220
IORInterceptor	220
Include file	221
IORInterceptor Methods	221
ORBInitializer	222
Include file	222
ORBInitializer Methods	222
ORBInitInfo	223
Include file	223
ORBInitInfo Member Classes	223
ORBInitInfo Methods	223
Parameter	226
Include file	226
Members	226
ParameterList	226
Include file	226
PolicyFactory	226
Include file	226
PolicyFactory Method	227
RequestInfo	227
Include file	227
RequestInfo methods	227
ServerRequestInfo	230

Include file	231
ServerRequestInfo methods	231
ServerRequestInterceptor	233
Include file	233
ServerRequestInterceptor methods	233

VisiBroker Interceptor and object wrapper interfaces and classes for C++ 237

Introduction	237
InterceptorManagers	237
IOR templates	238
InterceptorManager	238
InterceptorManagerControl	238
Include file	238
InterceptorManagerInterceptor method	238
BindInterceptor	239
Include file	239
BindInterceptor methods	239
BindInterceptorManager	240
Include file	240
BindInterceptorManager method	240
ClientRequestInterceptor	241
Include file	241
ClientRequestInterceptor methods	241
ClientRequestInterceptorManager	242
Include file	242
ClientRequestInterceptorManager methods	243
POALifeCycle Interceptor	243
Include file	243
POALifeCycleInterceptor methods	243
POALifeCycleInterceptorManager	244
Include file	244
POALifeCycleInterceptorManager method	244
ActiveObjectLifeCycleInterceptor	244
Include file	244
ActiveObjectLifeCycleInterceptor methods	245
ActiveObjectLifeCycleInterceptorManager	245
Include file	245
ActiveObjectLifeCycleInterceptorManager method	245
ServerRequestInterceptor	246
Include file	246
ServerRequestInterceptor methods	246
ServerRequestInterceptorManager	247
Include file	247
ServerRequestInterceptorManager method	247
IORCreationInterceptor	247
Include file	248
IORInterceptor method	248
IORCreationInterceptorManager	248
Include file	248
IORCreationInterceptorManager method	248
VISClosure	249
Include file	249
VISClosure members	249
VisExtendedClosure	249
Code sample	249
VISClosureData	250

VISClosureData methods.....	250
ChainUntypedObjectWrapperFactory	250
Include file	250
ChainUntypedObjectWrapperFactory methods	250
UntypedObjectWrapper	251

Quality of Service interfaces and classes 253

CORBA::PolicyManager	253
IDL definition.....	253
Include file	253
Methods.....	253
CORBA::PolicyCurrent.....	254
IDL definition.....	254
Include file	254
CORBA::Object	254
IDL definition.....	254
Include file	255
Methods.....	255
Messaging::RebindPolicy	256
IDL definition.....	256
Include file	256
Policy values.....	257
QoSExt::DeferBind Policy	257
IDL definition.....	258
Include file	258
QoSExt::RelativeConnectionTimeoutPolicy	258
IDL definition.....	258
Include file	258
Messaging::RelativeRequestTimeoutPolicy	258
IDL definition.....	259
Include file	259
Messaging::RelativeRoundtripTimeoutPolicy	259
IDL definition.....	259
Include file	259
Messaging::SyncScopePolicy.....	259
IDL definition.....	260
Include file	260

IOP and IIOP interfaces and classes..... 261

IIOP::ProfileBody	261
Include file	261
ProfileBody members.....	261
IOP::IOR.....	262
Include file	262
IOR members	262
IOP::TaggedProfile	262
Include file	262
TaggedProfile members.....	262

Marshal buffer interfaces and classes 265

CORBA::MarshalInBuffer	265
Include file	265
CORBA::MarshalInBuffer constructors/destructors	265
CORBA::MarshalInBuffer methods	266
CORBA::MarshalInBuffer operators.....	268
CORBA::MarshalOutBuffer	269
Include file	269

CORBA::MarshalOutBuffer constructors/destructors.....	269
CORBA::MarshalOutBuffer methods.....	270
CORBA::MarshalOutBuffer operators	272
Location service interfaces and classes	273
Agent.....	273
IDL definition	273
Include file	274
Agent methods.....	274
Desc	277
IDL definition	277
Desc members	278
Fail	278
Fail members	278
TriggerDesc.....	279
IDL definition	279
TriggerDesc members.....	279
TriggerHandler.....	279
IDL definition	279
Include file	280
TriggerHandler methods.....	280
<type>Seq	280
<type>Seq methods	281
<type>SeqSeq	281
<type>SeqSeq methods.....	281
Initialization interfaces and classes	283
VISInit	283
Include file	283
VISInit constructors/destructors	283
VISInit methods	284
Real-Time CORBA interfaces and classes	285
Introduction	285
Include file	285
RTCORBA::Current.....	286
RTCORBA::Current Creation and Destruction	286
IDL definition	286
RTCORBA::Current methods.....	286
RTCORBA::Mutex	287
Mutex Creation and Destruction	287
IDL definition	287
RTCORBA::Mutex Methods	288
RTCORBA::NativePriority.....	288
IDL definition	288
RTCORBA::Priority	288
IDL definition	289
RTCORBA::PriorityMapping.....	289
PriorityMapping Creation and Destruction.....	289
IDL definition	290
PriorityMapping Methods.....	290
RTCORBA::PriorityModel	291
RTCORBA::PriorityModelPolicy	292
IDL definition	292
RTCORBA::RTORB.....	292
RTORB Creation and Destruction.....	293
IDL definition	293

RTORB Methods	293
RTCORBA::ThreadpoolId	295
RTCORBA::ThreadpoolPolicy	295
IDL definition	295

Pluggable Transport Interface classes 297

VSPTransConnection	297
Include file	297
VSPTransConnection methods	297
VISPTransConnectionFactory	300
Include file	300
VISPTransConnectionFactory methods	300
VISPTransListener	301
Include file	301
VISPTransListener methods	301
VISPTransListenerFactory	302
Include file	302
VISPTransListenerFactory methods	302
VISPTransProfileBase	303
Include file	303
VISPTransProfileBase methods	303
VISPTransProfileBase members	304
VISPTransProfileBase base class methods	304
VISPTransProfileFactory	305
Include file	305
VISPTransProfileFactory methods	305
VISPTransBridge	306
Include file	306
VISPTransBridge methods	306
VISPTransRegistrar	307
Include file	307
VISPTransRegistrar methods	307

VisiBroker for C++ Logging 309

VISDLoggerMgr	309
Include file	309
VISDLoggerMgr methods	309
VISDLogger	310
Include file	310
VISDLogger methods	311
VISDAppenderFactory	311
Include file	311
VISDAppenderFactory methods	311
VISDAppender	312
Include file	312
VISDAppender methods	312
VISDLayoutFactory	313
Include file	313
VISDLayoutFactory methods	313
VISDLayout	313
Include file	314
VISDLayout methods	314
VISDConfig	314
Include file	314
LogAppenderConfig structure	314
VISDLogRecord	315
Include file	315

VISDLogRecord methods	315
VISDLogLevel	316
Include file	316
Level enumeration	316
Index	317

Introduction to VisiBroker

VisiBroker is a set of services and tools that enable you to build, deploy, and manage distributed enterprise applications in your corporate environment. These applications provide dynamic content by using JSP, servlets, and Enterprise Java Bean (EJB) technologies.

Accessing VisiBroker online help topics in the standalone Help Viewer

To access the online help through the standalone Help Viewer on a machine where the product is installed, use one of the following methods:

Windows

- Choose Start > Programs > VisiBroker > Help Topics
- or
- Open the Command Prompt and go to the product installation `\bin` directory, then type the following command:

```
help
```

UNIX

Open a command shell and go to the product installation `/bin` directory, then enter the command:

```
help
```

Tip

During installation on UNIX systems, the default is to not include an entry for `bin` in your `PATH`. If you did not choose the custom install option and modify the default for `PATH` entry, and you do not have an entry for current directory in your `PATH`, use `./help` to start the help viewer.

Accessing VisiBroker online help topics from within a VisiBroker GUI tool

To access the online help from within a VisiBroker GUI tool, choose Help > Help Topics.

The Help menu also contains shortcuts to specific documents within the online help. When you select one of these shortcuts, the Help Topics viewer is launched and the item selected from the Help menu is displayed.

Documentation conventions

The documentation for VisiBroker uses the typefaces and symbols described below to indicate special text:

Convention	Used for
<i>italics</i>	Used for new terms and book titles.
computer	Information that the user or application provides, sample command lines and code.
bold computer	In text, bold indicates information the user types in. In code samples, bold highlights important statements.
[]	Optional items.
...	Previous argument that can be repeated.
>	Two mutually exclusive choices.

Platform conventions

The VisiBroker documentation uses the following symbols to indicate platform-specific information:

Windows: All supported Windows platforms.

Win2003: Windows 2003 only

WinXP: Windows XP only

Win2000: Windows 2000 only

UNIX: UNIX platforms

Solaris: Solaris only

Linux: Linux only

Contacting Micro Focus

Our Web site gives up-to-date details of contact numbers and addresses.

Further Information and Product Support

Additional technical information or advice is available from several sources.

The product support pages contain a considerable amount of additional information, such as:

- The WebSync service, where you can download fixes and documentation updates.
- The Knowledge Base, a large collection of product tips and workarounds.
- Examples and Utilities, including demos and additional product documentation.

To connect, enter <http://www.microfocus.com> in your browser to go to the Micro Focus home page.

Note:

Some information may be available only to customers who have maintenance agreements.

If you obtained this product directly from Micro Focus, contact us as described on the Micro Focus Web site, <http://www.microfocus.com>. If you

obtained the product from another source, such as an authorized distributor, contact them for help first. If they are unable to help, contact us.

Information We Need

However you contact us, please try to include the information below, if you have it. The more information you can give, the better Micro Focus SupportLine can help you. But if you don't know all the answers, or you think some are irrelevant to your problem, please give whatever information you have.

- The name and version number of all products that you think might be causing a problem.
- Your computer make and model.
- Your operating system version number and details of any networking software you are using.
- The amount of memory in your computer.
- The relevant page reference or section in the documentation.
- Your serial number. To find out these numbers, look in the subject line and body of your Electronic Product Delivery Notice email that you received from Micro Focus.

Contact information

Our Web site gives up-to-date details of contact numbers and addresses.

Additional technical information or advice is available from several sources.

The product support pages contain considerable additional information, including the WebSync service, where you can download fixes and documentation updates. To connect, enter <http://www.microfocus.com> in your browser to go to the Micro Focus home page.

If you are a Micro Focus SupportLine customer, please see your SupportLine Handbook for contact information. You can download it from our Web site or order it in printed form from your sales representative. Support from Micro Focus may be available only to customers who have maintenance agreements.

You may want to check these URLs in particular:

- <https://www.microfocus.com/product-trials/corba/index.aspx?productname=VisiBroker> (updated VisiBroker software and other files)
- <https://supportline.microfocus.com/productdoc.aspx> (documentation updates and PDFs)

To subscribe to Micro Focus electronic newsletters, use the online form at:

<http://www.microfocus.com/Resources/Newsletters/infocus/newsletter-subscription.asp>

Generated interfaces and classes

This section describes classes generated by the VisiBroker for C++ IDL compiler, their uses, and their features.

Generated interfaces and classes overview

The VisiBroker IDL compiler generates classes that make it easier for you to develop client applications and object servers. Many of these generated classes are available for CORBA classes.

- [stub classes](#)
- [servant classes](#)
- [tie classes](#)
- [var classes](#)

<Interface_name>

The <interface_name> class is generated for a particular IDL interface and is intended for use by client applications. This class provides all of the methods defined for a particular IDL interface. When a client uses an object reference to invoke methods on the object, the stub methods are actually invoked. The stub methods allow a client operation request to be packaged, sent to the object implementation, and the results to be reflected. This entire process is transparent to the client application.

When a client uses a local object reference to invoke methods on the local object, there is no stub method involved.

Note

You should never modify the contents of a stub class generated by the IDL compiler.

<Interface_name>ObjectWrapper

This class does not apply to local interfaces. For non-local interfaces, this class is used to derive typed object wrappers and is generated for all your non-local interfaces when you invoke the `idl2cpp` command with the `-obj_wrapper` option. For more information about the `-obj_wrapper` option, see "Programmer tools for C++" in the *VisiBroker for C++ Developer's Guide*.

```
static void add(CORBA::ORB_ptr orb,
               CORBA::ObjectFactory factory,
               VISObjectWrapper::Location loc);

static void remove(CORBA::ORB_ptr orb,
                  CORBA::ObjectFactory factory,
                  VISObjectWrapper::Location loc);
```

Removes an un-typed object wrapper from a server application.

Parameter	Description
orb	The ORB the client wishes to use, returned by the <code>ORB_init</code> method.
factory	The factory method for the object wrapper class that you want to remove.
loc	The location of the object wrapper being removed, which should be one of the following values: <code>VISObjectWrapper::Client</code> , <code>VISObjectWrapper::Server</code> <code>VISObjectWrapper::Both</code>

`_POA_<class_name>`

The `_POA_<class_name>` class is an abstract base class generated by the IDL compiler, which is used to derive an object implementation class. Object implementations are usually derived from a servant class, which provides the necessary methods for receiving and interpreting client operation requests.

`_tie_<class_name>`

The `_tie_<class_name>` class is generated by the IDL compiler to aid in the creation of delegation implementations. The tie class allows you to create an object implementation that delegates all operation requests to another object. This allows you to use existing objects that you do not wish to inherit from the `CORBA::Object` class.

`<class_name>_var`

The `<class_name>_var` class is generated for an IDL interface and provides simplified memory management semantics.

Core interfaces and classes

This section describes the VisiBroker for C++ core interfaces and classes.

PortableServer::AdapterActivator

Adapter activators are associated with Portable Object Adapters (POAs). They make it possible for POAs to create child POAs under the following circumstances:

- On demand,
- As a side-effect of receiving a request which names the child POA (or one of its children), or
- When the `find_POA` method is called with an `activate` parameter set to `TRUE`.

For more information about POAs, see "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

IDL Definition

```
interface AdapterActivator {
    boolean unknown_adapter(in POA parent, in string
name);
};
```

PortableServer::AdapterActivator methods

```
CORBA::Boolean unknown_adapter(
    PortableServer::POA_ptr parent, const char* name);
```

This method is called when the VisiBroker ORB receives a request for an object reference which identifies a target POA that does not exist. The VisiBroker ORB invokes this method once for each POA that must be created in order for the POA to exist (starting with the ancestor POA closest to the root POA).

Parameter	Description
<code>parent</code>	The parent POA associated with the adapter activator on which the method is to be invoked.
<code>name</code>	The name of the POA to be created (relative to the parent).

BindOptions

Deprecated interface

This interface is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For support of the current CORBA specification, see "Client basics" in the *VisiBroker for C++ Developer's Guide*.

```
struct BindOptions
```

This structure is used to specify options to the `_bind` method, described in [“Object” on page 17](#). Each process has a global `BindOptions` structure that is used for all `_bind` invocations that do not specify bind options. You can modify the default bind options using the `Object::_default_bind_options` method.

Bind options may also be set for a particular object and will remain in effect for the lifetime of the connection to that object.

Include file

The `corba.h` file should be included when you use this structure.

BindOptions members

```
CORBA::Boolean defer_bind;
```

If set to `TRUE`, the establishment of the connection between client and the object implementation is delayed until the first client operation is issued.

If set to `FALSE`, the `_bind` method should establish the connection immediately.

```
CORBA::Boolean enable_rebind;
```

If set to `TRUE` and the connection is lost, due to a network failure or some other error, the VisiBroker ORB attempts to re-establish a connection to a suitable object implementation.

If set to `FALSE`, no attempt is made to reconnect the client with the object implementation.

Deprecated member

```
CORBA::Long max_bind_tries;
```

This member has been deprecated. It is no longer used for manipulating the interactions between the ORB and the OAD. It was used to specify the number of times to retry a bind request when the OAD is busy.

```
CORBA::ULong send_timeout;
```

This member specifies the maximum time in seconds that a client is to block waiting to send an operation request. If the request times out, `CORBA::NO_RESPONSE` exception is raised and the connection to the server is destroyed.

The default value of 0 (zero) indicates that the client is to block indefinitely.

```
CORBA::ULong receive_timeout;
```

This member specifies the maximum time in seconds that a client is to block waiting for a response to an operation request. If the request times out, a `CORBA::NO_RESPONSE` exception is raised and the connection to the server is destroyed.

The default value of 0 (zero) indicates that the client is to block indefinitely.

```
CORBA::ULong connection_timeout;
```

This member specifies the maximum time in seconds that a client is to wait for a connection. If the time specified is exceeded, a `CORBA::NO_IMPLEMENT` exception is raised.

The default value of 0 indicates that the default system time-out for connections is to be used.

BOA

Deprecated interface

This class is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For support of the current CORBA specification Micro Focus recommends using POAs; see "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

class **BOA**

The BOA class represents the Basic Object Adaptor and provides methods for creating and manipulating objects and object references. Object servers use the BOA to activate and deactivate object implementations and to specify the thread policy they wish to use.

You do not instantiate a BOA object. Instead, you obtain a reference to a BOA object by invoking the `ORB::BOA_init` method.

VisiBroker provides extensions to the CORBA BOA specification which are covered in "[VisiBroker extensions to CORBA::BOA](#)". These methods provide for the management of connections, threads, and the activation of services.

Include file

Include the file `corba.h` when you use this class.

CORBA::BOA methods

`CORBA::Object_ptr create(const CORBA::ReferenceData& refData, extension::CreationImplDef& creationImplDef)`

This method registers the specified implementation with the OAD.

Parameter	Description
<code>refData</code>	This parameter is not used, but is provided for compliance with the CORBA specification.
<code>creationImplDef</code>	This pointer's true type is <code>CreationImplDef</code> . It provides the interface name, object name, path name of the executable and the activation policy and other parameters. See " Activation interfaces and classes " for a complete discussion of the <code>CreationImplDef</code> class.

`void deactivate_impl(extension::ImplementationDef_ptr implDefPtr)`

This method causes requests to the implementation to be discarded.

The method deactivates the implementation specified by `implDefPtr`. Once this method is called, no further client requests are delivered to the object within this implementation until the objects and implementation are re-

activated. To cause the implementation to again accept requests, call `impl_is_ready` or `obj_is_ready`.

Parameter	Description
<code>implDefPtr</code>	This pointer's true type is <code>CreationImplDef</code> . It provides the interface name, object name, path name of the executable and activation policy, along with other parameters.

`void deactivate_obj (CORBA::Object_ptr objPtr)`

This method requests that the BOA deactivate the specified object. Once this method is invoked, the BOA does not deliver any requests to the object until `obj_is_ready` or `impl_is_ready` is invoked.

Parameter	Description
<code>objPtr</code>	A pointer to the object to be deactivated.

`static CORBA::BOA_ptr _duplicate (CORBA::BOA_ptr ptr)`

This static method duplicates the BOA pointer that is passed in as a parameter.

Parameter	Description
<code>ptr</code>	A BOA pointer.

`void exit_impl_ready ()`

This method provides backward compatibility with earlier releases of VisiBroker for C++. It invokes `BOA::shutdown`, described in ["void shutdown\(\)" on page 12](#) which causes a previous invocation of the `impl_is_ready` method to return. This method cannot be invoked in the context of an active request.

`CORBA::ReferenceData_ptr get_id (CORBA::Object_ptr objPtr)`

This method returns the reference data for the specified object. The reference data is set by the object implementation at activation time and is guaranteed to remain constant throughout the life of the object.

Parameter	Description
<code>objPtr</code>	A pointer to the object whose reference data is to be returned.

`CORBA::Principal_ptr get_principal (CORBA::Object_ptr objPtr, CORBA::Environment_ptr env=NULL)`

This method returns the `Principal` object associated with the specified object. This method may only be called by an object implementation during the processing of a client operation request.

Parameter	Description
<code>objPtr</code>	A pointer to the object whose implementation is to be changed.
<code>env</code>	A pointer to the <code>Environment</code> object associated with this <code>Principal</code> .

```
void impl_is_ready(const char *service_name,
                  extension::Activator_ptr activator,
                  CORBA::Boolean block = 1)
```

This method instructs the BOA to delay activation of the object implementation associated with the specified `service_name` until a client requests the service. Once a client requests the service, the specified `Activator` object is used to activate the object implementation. If `block` is set to 0, this method blocks the caller until the `exit_impl_ready` method is invoked.

Parameter	Description
<code>service_name</code>	The service name associated with the specified <code>Activator</code> object.
<code>activator</code>	The <code>Activator</code> to be used to activate the object implementation
<code>block</code>	If set to 1, indicates that this method should block the caller. If set to zero, the method does not block. The default behavior is to block.

```
void impl_is_ready(extension::ImplementationDef_ptr
                  impl=NULL)
```

This method notifies the BOA that one or more objects in the server are ready to receive service requests. This method blocks the caller until the `exit_impl_ready` method is invoked. If all objects that the implementation offers were created through C++ instantiation and activated using the `obj_is_ready` method, do not specify the `ImplementationDef_ptr`.

An object implementation may offer only one object and may want to defer the activation of that object until a client request is received. In these cases, the object implementation does not need to first invoke the `obj_is_ready` method. Instead, it may simply invoke this method, passing the `ActivationImplDef` pointer as its single object.

Parameter	Description
<code>impl</code>	This pointer's true type is <code>ActivationImplDef</code> and provides the interface name, object name, path name of the executable and activation policy, along with other parameters.

```
static CORBA::BOA_ptr _nil()
```

This static method returns a NULL BOA pointer that can be used for initialization purposes.

```
void obj_is_ready(CORBA::Object_ptr obj,
                  extension::ImplementationDef_ptr impl_ptr = NULL)
```

This method notifies the BOA that the specified object is ready for use by clients. There are two different ways to use this method:

- Objects that have been created using C++ instantiation should only specify a pointer to the object and let the `ImplementationDef_ptr` default to NULL.

- Objects whose creation is to be deferred until the first client request is received should specify a `NULL Object_ptr` and provide a pointer to an `ActivationImplDef` object that has been initialized.

Parameter	Description
<code>obj</code>	A pointer to the object to be activated.
<code>impl_ptr</code>	A optional pointer to an <code>ActivationImplDef</code> object.

```
static void CORBA::release(CORBA::BOA_ptr boa)
```

This static method releases the specified BOA pointer. Once the object's reference count reaches zero, the object is automatically deleted.

Parameter	Description
<code>boa</code>	A valid BOA pointer.

```
static RegistrationScope scope()
```

This static method returns the registration scope of the BOA. The registration scope of an object can be `SCOPE_GLOBAL` or `SCOPE_LOCAL`. Only objects with a global scope are registered with the osagent.

```
static void scope(RegistrationScope val)
```

This static method changes the registration scope of the BOA to the specified value.

Parameter	Description
<code>val</code>	The scope for this BOA. Must be one of the following values: <code>LOCAL_SCOPE</code> for transient objects. <code>GLOBAL_SCOPE</code> for objects registered with the Smart Agent.

```
void shutdown()
```

This method causes a previous invocation of the `impl_is_ready` method to return. This method cannot be invoked in the context of an active request.

```
CORBA::Object_ptr string_to_object(const char * str)
```

This method converts a stringified object reference, created with the `object_to_string` method described in "[char *object_to_string\(CORBA::Object_ptr obj\);](#)" on page 25, back into an object reference that may be used to invoke methods on the object.

Parameter	Description
<code>str</code>	The string to be converted back to an object reference.

Deprecated methods

```
void dispose(CORBA::Object_ptr objPtr)
```

This method unregisters the implementation of the specified object from the Object Activation Daemon. Once this method is invoked, all references to the specified object are invalid and any connections to this object implementation are broken. If the object has been allocated, it is the application's responsibility to delete the object. This method is **deprecated**.

since VisiBroker 4.x. We recommend that you use the [OAD](#) interface instead.

Parameter	Description
<code>objPtr</code>	A pointer to the object to be unregistered.

VisiBroker extensions to CORBA::BOA

`CORBA::ULong connection_max()`

This method returns the maximum number of connections allowed.

`void connection_max(CORBA::ULong max_conn)`

This method is used by servers to set the maximum number of connections allowed.

Parameter	Description
<code>max_conn</code>	The maximum number of connections allowed.

`CORBA::ULong thread_max()`

This method returns the maximum number of threads allowed if the TPool thread policy has been selected.

`void thread_max(CORBA::ULong max)`

This method sets the maximum number of threads allowed when the TPool thread policy has been selected. If the current number of threads exceeds this number, the extra threads are destroyed one at a time as soon as they are no longer in use until the number of threads is down to max.

Parameter	Description
<code>max</code>	The maximum number of threads to be allowed.

`CORBA::ULong thread_stack_size()`

Returns the maximum thread stack size (in bytes) when TPool or TSession thread policy is selected.

`void thread_stack_size(CORBA::ULong size)`

Sets the maximum thread stack size (in bytes) when TPool or TSession thread policy is selected.

Parameter	Description
<code>size</code>	The new stack size to be set.

CompletionStatus

enum **CompletionStatus**

This enumeration represents how an operation request completed.

IDL Definition

```
enum CompletionStatus {  
    COMPLETED_YES;
```

```
COMPLETED_NO;  
COMPLETED_MAYBE; };
```

CompletionStatus members

`COMPLETED_YES = 0` Indicates the operation request completed successfully.

`COMPLETED_NO = 1` Indicates the operation request was not completed, due to some sort of exception or error.

`COMPLETED_MAYBE = 2` Indicates that the operation request may have completed, in spite of an exception or error.

Context

```
class CORBA::Context
```

The `Context` class contains information about a client application's environment that is passed to a server as an implicit parameter during static or dynamic method invocations. It can be used to communicate special information that needs to be associated with a request, but is not part of the method's argument list.

The `Context` class consists of a list of properties, stored as name-value pairs, and provides methods for setting and manipulating those properties. A `Context` contains an `NVList` object and chains the name-value pairs together.

A `Context_var` class is also available and provides simpler memory management semantics.

Include file

Include the `corba.h` file when you use this class.

Context methods

```
const char *context_name() const;
```

This method returns the name used to identify this context. If no name was provided when this object was created, it returns a `NULL` value.

```
void create_child(const char * name, CORBA::Context_out  
                  context_ptr);
```

This method creates a child `Context` for this object.

Parameter	Description
<code>name</code>	The name of the new <code>Context</code> object.
<code>context_ptr&</code>	A reference to newly created child <code>Context</code> .

```
void delete_values(const char *name);
```

This method deletes one or more properties from this object.

Parameter	Description
name	The name of the property, or properties, to be deleted. To delete all matching properties, the name may contain a trailing "*" wildcard character. To delete all properties, specify a single asterisk.

```
static CORBA::Context_ptr _duplicate(CORBA::Context_ptr ctx);
```

This method duplicates the specified object.

Parameter	Description
ctx	The object to be duplicated.

```
void get_values(const char *start_scope, CORBA::Flags flag, const char *name, CORBA::NVList_out NVList_ptr);
```

This method searches the Context object hierarchy and retrieves one or more of the name/value pairs specified by the name parameter. If the name parameter has a trailing wildcard character (*), then all matching properties and their values are returned. It then creates an NVList object and places the name/value pairs in the NVList. If the name parameter is an empty string or a NULL string, the BAD_PARAM standard system exception is raised. If the name parameter is not found, the BAD_CONTEXT standard system exception is raised and no property list is returned.

The start_scope parameter specifies the name of the context where the search begins. If the property is not found, the search continues up the Context object hierarchy until a match is found, or until there are no more Context objects to search. If the start_scope parameter is omitted, the search begins with the specified context object.

Parameter	Description
start_scope	The name of the Context object at which to start the search. If set to CORBA::Context::_nil(), the search begins with the current Context. To restrict the search scope can to just the current Context, specify CORBA::CTX_RESTRICT_SCOPE.
flag	An exception is raised if no matching context name is found.
name	The property name to search for. A trailing "*" wildcard character may be used to retrieve all properties that match name.
NVList_ptr	A reference to the list of properties found.

```
static CORBA::Context_ptr _nil();
```

This method returns a NULL Context_ptr suitable for initialization purposes.

```
CORBA::Context_ptr parent();
```

This method returns a pointer to the parent Context. If there is no parent Context, a NULL value is returned.

```
static void _release(CORBA::Context_ptr ctx);
```

This static method releases the specified Context object. Once the object's reference count reaches zero, the object is automatically deleted.

Parameter	Description
ctx	The object to be released.

```
void set_one_value(const char *name, const CORBA::Any& anAny);
```

This method adds a property to this object using the specified name and value.

Parameter	Description
name	The property's name.
anAny	The property's value.

```
void set_values(CORBA::NVList_ptr _list);
```

This method adds one or more properties to this object, using the name/value pairs specified in the NVList. When you create the NVList object to be used as an input parameter to this method, you must set the Flags field to zero and each Any object added to the NVList must have its TypeCode set to TC_string. For more information on the NVList class, see [“Dynamic interfaces and classes”](#).

Parameter	Description
_list	A list of name/value pairs to be added to this object.

PortableServer::Current

```
class PortableServer::Current : public CORBA::Current
```

This class provides methods with access to the identity of the object on which the method was called. The Current class provides support for servants which implement multiple objects but can be used within the context of POA-dispatched method invocations on any servant.

IDL Definition

```
interface Current : CORBA::Current {
    exception NoContext {};
    POA get_POA() raises (NoContext);
};
```

PortableServer::Current methods

```
PortableServer::POA *get_POA();
```

This method returns a reference to the POA which implements the object in whose context it is called. If this method is called from outside the context of a POA-dispatched method, a NoContext exception is raised.


```
PortableServer::ObjectId get_object_id();
```

This method returns the `ObjectId` which identifies the object in whose context it was called. If this method is called from outside the context of a POA-dispatched method, a `NoContext` exception is raised.

Exception

```
class CORBA::Exception
```

The `Exception` class is the base class of the system exception and user exception classes. For more information, see [“SystemException” on page 45](#).

Include file

You should include the `corba.h` file when using this class.

Object

```
class CORBA::Object
```

All ORB objects are derived from the `Object` class, which provides methods for binding clients to objects and manipulating object references as well as querying and setting an object's state. `Object` class methods are implemented by the ORB.

VisiBroker for C++ provides extensions to the CORBA Object specification. These are covered in [“VisiBroker extensions to CORBA::Object” on page 19](#).

Include file

You should include the file `corba.h` when using this class.

CORBA::Object methods

```
void _create_request(CORBA::Context_ptr ctx, const char  
  *operation, CORBA::NVList_ptr arg_list,  
  CORBA::NamedValue_ptr result, CORBA::Request_out  
  request, CORBA::Flags req_flags);
```

This method creates a `Request` for an object implementation that is suitable for invocation with the Dynamic Invocation Interface.

Parameter	Description
<code>ctx</code>	The Context associated with this request. For more information, see “CompletionStatus” on page 13 .
<code>operation</code>	The name of the operation to be performed on the object implementation.
<code>arg_list</code>	A list of arguments to pass to the object implementation. See “Dynamic interfaces and classes” for more information.
<code>result</code>	The result of the operation. See “Dynamic interfaces and classes” for more information.
<code>request</code>	A pointer to the <code>Request</code> that is created. For more information, see “Dynamic interfaces and classes” .
<code>req_flags</code>	This flag must be set to <code>OUT_LIST_MEMORY</code> if one or more of the <code>NamedValue</code> items in <code>arg_list</code> are output arguments.

```

void _create_request(
    CORBA::Context_ptr ctx,
    const char *operation,
    CORBA::NVList_ptr arg_list,
    CORBA::NamedValue_ptr result,
    CORBA::ExceptionList_ptr eList,
    CORBA::ContextList_ptr ctxList,
    CORBA::Request_out request,
    CORBA::Flags req_flags);

```

This method creates a Request for an object implementation that is suitable for invocation with the Dynamic Invocation Interface.

Parameter	Description
ctx	The Context associated with this request. For more information, see "CompletionStatus" on page 13 .
operation	The name of the operation to be performed on the object implementation.
arg_list	A list of arguments to pass to the object implementation. See "Dynamic interfaces and classes" for more information.
result	The result of the operation. See the "Dynamic interfaces and classes" for more information.
eList	A list of exceptions for this request.
ctxList	A list of Context objects for this request.
request	A pointer to the Request that is created. See "Dynamic interfaces and classes" for more information.
req_flags	This flag must be set to OUT_LIST_MEMORY if one or more of the NamedValue items in arg_list are output arguments.

```

static CORBA::Object_ptr _duplicate(CORBA::Object_ptr
    obj);

```

This static method duplicates the specified Object_ptr and returns a pointer to the object. The object's reference count is increased by one.

Parameter	Description
obj	The object pointer to be duplicated.

```

CORBA::InterfaceDef_ptr _get_interface();

```

This method returns a pointer to this object's interface definition. See ["Interface repository interfaces and classes \(C++\)"](#) for more information.

```

CORBA::ULong _hash(CORBA::ULong maximum);

```

This method returns a hash value for this object. This value does change for the lifetime of this object, however the value is not necessarily unique. If two objects return different hash values, then they are not identical. The upper bound of the hash value may be specified. The lower bound is 0 (zero).

Parameter	Description
maximum	The upper bound of the hash value returned.

```
CORBA::Boolean _is_a(const char *logical_type_id);
```

This method returns `TRUE` if this object implements the interface associated with the repository id. Otherwise, it returns `FALSE`.

Parameter	Description
<code>logical_type_id</code>	The repository identifier to check.

```
CORBA::Boolean _is_equivalent(CORBA::Object_ptr  
    other_object);
```

This method returns `TRUE` if the specified object pointer and this object point to the same object implementation. Otherwise, it returns `FALSE`.

Parameter	Description
<code>other_object</code>	Pointer to an object that is to be compared to this object.

```
static CORBA::Object_ptr _nil();
```

This static method returns a `NULL` pointer suitable for initialization purposes.

```
CORBA::Boolean _non_existent();
```

This method returns `TRUE` if the object represented by this object reference no longer exists.

```
CORBA::Request_ptr _request(const char* operation);
```

This method creates a `Request` suitable for invoking methods on this object. A pointer to the `Request` object is returned. See [“Dynamic interfaces and classes”](#) for more information.

Parameter	Description
<code>operation</code>	The name of the object method to be invoked.

```
CORBA::Object_ptr _resolve_reference(const char* id);
```

Your client application can invoke this method on an object reference to resolve the server-side interface with the specified service identifier. This method causes the `ORB::_resolve_initial_references` method to be invoked on the server-side to resolve the specified service. This method returns an object reference which your client can narrow to the appropriate server type.

This method is typically used by client applications that wish to manage a server's attributes.

Parameter	Description
<code>id</code>	The name of the interface to be resolved on the server-side.

VisiBroker extensions to `CORBA::Object`

```
CORBA::BindOptions* _bind_options();
```

This method returns a pointer to the bind options that used for this object only. For more information, see [“BindOptions” on page 7](#).

```
void _bind_options(const CORBA::BindOptions& opt);
```

This method sets the bind options for this object only. The options that are set remain in effect for the lifetime of the proxy object. Any changes to time-out values will apply to all subsequent send and receive operations as well as any re-bind operations. For more information, see [“BindOptions” on page 7](#).

Parameter	Description
<code>opt</code>	The new bind options for this object.

```
static CORBA::Object_ptr _bind_to_object(  
    const char *rep_id,  
    const char *object_name=NULL,  
    const char *host_name=NULL,  
    const CORBA::BindOptions *options=NULL,  
    CORBA::ORB_ptr orb=NULL);
```

This method attempts to bind to the object with the specified repository_id and object_name on the specified host using the specified BindOptions and ORB.

Parameter	Description
<code>rep_id</code>	The repository ID of the desired object.
<code>object_name</code>	The name of the desired object.
<code>host_name</code>	The name of the desired host where the object implementation is executing.
<code>options</code>	The bind options for this connection. See “BindOptions” on page 7 for more information.
<code>orb</code>	The ORB to use.

Deprecated method

```
CORBA::BOA _boa() const;
```

This method is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For current CORBA specification support, Micro Focus recommends using POAs rather than BOAs. See "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

The method returns a pointer to the Basic Object Adaptor with which this object is registered.

```
static CORBA::Object_ptr _clone(  
    CORBA::Object_ptr obj,  
    CORBA::Boolean reset_connection = 1UL);
```

This method clones the specified object reference.

Parameter	Description
<code>obj</code>	The object reference to be cloned.
<code>reset_connection</code>	This parameter is not used.

```
static const CORBA::BindOptions
    *_default_bind_options();
```

This method returns a pointer to the global, per client process BindOptions. For more information, see [“BindOptions” on page 7](#).

```
static void _default_bind_options(
    const CORBA::BindOptions& bindOptions);
```

This method sets the bind options to be used by default for all `_bind` invocations that do not specify their own bind options. For more information, see [“BindOptions” on page 7](#).

```
static const CORBA::TypeInfo *_desc();
```

Returns type information for this object.

```
const char *_interface_name() const;
```

This method returns this object's interface name.

```
CORBA::Boolean _is_bound() const;
```

This method returns `FALSE` if the client process has established a connection to an object implementation.

```
CORBA::Boolean _is_local() const;
```

This method returns `TRUE` if the object implementation resides within the same process or address space as the client application.

```
CORBA::Boolean _is_persistent() const;
```

This method returns `TRUE` if this object is a persistent object. A `FALSE` value returned is not an authoritative answer that the object is not persistent.

```
CORBA::Boolean _is_remote() const;
```

This method returns `TRUE` if the object implementation resides in a different process or address space than the client application. The client and object implementation may or may not reside on the same host.

```
const char *_object_name() const;
```

This method returns the object name associated with this object.

```
CORBA::Long _ref_count() const;
```

Returns the reference count for this object.

```
void _release();
```

Decrements this object's reference count and releases the object if the reference count has reached 0.

```
const char *_repository_id() const;
```

This method returns this object's repository identifier.

ORB

```
class CORBA::ORB
```

The ORB class provides an interface to the Object Request Broker. It provides methods to the client object, independent of the particular Object or Object Adaptor.

VisiBroker provides extensions to the CORBA ORB that are discussed in [“VisiBroker extensions to CORBA::ORB” on page 28](#). These methods are provided for the management of connections, threads, and the activation of services.

Include file

You should include the file `corba.h` when using this class.

CORBA::ORB methods

```
CORBA::Boolean work_pending();
```

This method returns true if the ORB has any work waiting to be processed.

```
static CORBA::TypeCode_ptr create_alias_tc(
    const char *repository_id,
    const char *type_name,
    CORBA::TypeCode_ptr original_type);
```

This static method dynamically creates a `TypeCode` for the alias with the specified type and name.

Parameter	Description
<code>repository_id</code>	The identifier generated by the IDL compiler or constructed dynamically.
<code>type_name</code>	The name of the alias's type.
<code>original_type</code>	The type of the original for which this alias is being created.

```
static CORBA::TypeCode_ptr create_array_tc(CORBA::Ulong
    length, TypeCode_ptr element_type);
```

This static method dynamically creates a `TypeCode` for an array.

Parameter	Description
<code>length</code>	The maximum number of array elements.
<code>element_type</code>	The type of elements stored in this array.

```
static CORBA::TypeCode_ptr create_enum_tc(const char
    *repository_id, const char *type_name, const
    CORBA::EnummemberSeq& members);
```

This static method dynamically creates a `TypeCode` for an enumeration with the specified type and members.

Parameter	Description
<code>repository_id</code>	The identifier generated by the IDL compiler or constructed dynamically.

Parameter	Description
type_name	The name of the enumeration's type.
members	A list of values for the enumeration's members.

void **create_environment**(CORBA::Environment_out **env**);
This method creates an Environment object.

Parameter	Description
env	The reference that will be set to point to the newly created Environment.

```
static CORBA::TypeCode_ptr create_exception_tc(
    const char *repository_id,
    const char *type_name,
    const CORBA::StructMemberSeq& members);
```

This static method dynamically creates a TypeCode for an exception with the specified type and members.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the structure's type.
members	A list of values for the structure members.

```
static CORBA::TypeCode_ptr create_interface_tc(
    const char *repository_id, const char *type_name);
```

This static method dynamically creates a TypeCode for the interface with the specified type.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the interface's type.

```
void create_list(
    CORBA::Long num, CORBA::NVList_out nvList);
```

This method creates an NVList with the specified number of elements and returns a reference to the list.

Parameter	Description
num	The number of elements in the list.
nvlist	Initialized to point to the newly created list.

void **create_named_value**(CORBA::NamedValue_out **value**);
This method creates a NamedValue object.

```
void create_operation_list(CORBA::OperationDef_ptr
    opDefPtr, CORBA::NVList_out nvList);
```

This method creates an argument list for the specified OperationDef object.

```
static CORBA::TypeCode_ptr
    create_recursive_sequence_tc(CORBA::Ulong bound,
        CORBA::Ulong offset);
```

This static method dynamically creates a TypeCode for a recursive sequence. The result of this method can be used to create other types. The offset parameter determines which enclosing TypeCode describes the elements of this sequence.

Parameter	Description
bound	The maximum number of sequence elements.
offset	Position within the buffer where the type code for the current element was previously generated.

```
static CORBA::TypeCode_ptr
    create_sequence_tc(CORBA::Ulong bound,
        CORBA::TypeCode_ptr element_type);
```

This static method dynamically creates a TypeCode for a sequence.

Parameter	Description
bound	The maximum number of sequence elements.
element_type	The type of elements stored in this sequence.

```
static CORBA::TypeCode_ptr
    create_string_tc(CORBA::Ulong bound);
```

This static method dynamically creates a TypeCode for a string.

Parameter	Description
bound	The maximum length of the string.

```
static CORBA::TypeCode_ptr create_struct_tc(
    const char *repository_id, const char *type_name,
    const CORBA::StructMemberSeq& members);
```

This static method dynamically creates a TypeCode for the structure with the specified type and members.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the structure's type.
members	A list of values for the structure members.

```
static CORBA::TypeCode_ptr create_union_tc(
    const char *repository_id,
    const char *type_name,
    CORBA::TypeCode_ptr discriminator_type,
    const CORBA::UnionMemberSeq& members);
```

This static method dynamically creates a TypeCode for a union with the specified type, discriminator and members.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the union's type.

Parameter	Description
discriminator_typ	The discriminating type for the union.
members	A list of values for the union members.

```
CORBA::Status get_default_context (
    CORBA::Context_ptr& contextPtr);
```

This method returns the default per-process Context maintained by VisiBroker. The default Context is often used in constructing DII requests. For more information, go to ["Context" on page 14](#).

Parameter	Description
contextPtr&	The property's value.

```
CORBA::Status get_next_response (CORBA::Request_out*&
    req);
```

This method blocks waiting for the response associated with a deferred request. You can use the `ORB::poll_next_response` method to determine if there is a response waiting to be received before you call this method.

Parameter	Description
req	Set to point to the request that has been received.

```
ObjectIdList *list_initial_services ();
```

This method returns a list of the names of any object services that are available to your application. These services may include the Location Service, Interface Repository, Name Service, or Event Service. You can use any of the returned names with the `ORB::resolve_initial_references` method to obtain the top-level object for that service.

```
char *object_to_string (CORBA::Object_ptr obj);
```

This method converts the specified object reference to a string, a process referred to as "stringification" in the CORBA specification. Object references that have been converted to strings can be stored in files, for example. This is an ORB method because different ORB implementations may have different conventions for representing object references as strings.

Deprecated method

```
CORBA::BOA_ptr ORB::BOA_init (
    int& argc, char *const *argv,
    const char *boa_identifier = (char *)NULL);
```

This method is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For current CORBA specification support, Micro Focus recommend using POAs. See "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

This ORB method returns a handle to the BOA and specifies optional networking parameters. The `argc` and `argv` parameters are the same

parameters passed to the object implementation process when it is started.

Parameter	Description
<code>argc</code>	The number of arguments passed.
<code>argv</code>	An array of char pointers to the arguments. All but two of the arguments take the form of a keyword and a value. This method ignores any keywords that it does not recognize.
<code>boa_identifier</code>	Identifies the type of BOA to be used. Use <code>TPool</code> if multiple thread support is desired. Use <code>TSingle</code> if the implementation does not use threads.

```
static CORBA::ORB_ptr ORB_init(int& argc, char *const
    *argv, const char *orb_id = NULL);
```

This method initializes the ORB and is used by both clients and object implementations. It returns a pointer to the ORB that can be used to invoke ORB methods. The `argc` and `argv` parameters passed to the application's main function can be passed directly to this method. Arguments accepted by this method take the form of name-value pairs so that they can be distinguished from other command line arguments.

Parameter	Description
<code>argc</code>	The number of arguments passed.
<code>argv</code>	An array of char pointers to the arguments. All but two of the arguments take the form of a keyword and a value. This method ignores any keywords that it does not recognize.
<code>boa_identifier</code>	Identifies the type of ORB to be used. The default is <code>IIOP</code> .

```
void perform_work();
```

This method instructs the ORB to perform some work.

```
CORBA::Boolean poll_next_response();
```

This method returns `TRUE` if a response to a deferred request was received, otherwise `FALSE` is returned. This call does not block.

```
CORBA::Object_ptr resolve_initial_references(const char
    * identifier);
```

This method resolves one of the names returned by the `ORB::list_initial_services` method, described in ["ObjectIDList *list_initial_services\(\);" on page 25](#), to its corresponding implementation object. The resolved object which is returned can then be narrowed to the appropriate server type. If the specified service cannot be found, an `InvalidName` exception is raised.

Parameter	Description
<code>identifier</code>	The name of the service whose top-level object is to be returned. The identifier is not the name of the object to be returned.

```
void register_initial_reference (const char *
    identifier, CORBA::Object_ptr obj);
```

This method registers the name to its corresponding implementation object. The corresponding object id could now be resolved using an object URL

format such as corbaloc. An `InvalidName` exception is raised if the identifier is empty or is already registered.

Parameter	Description
<code>identifier</code>	The name of the service by which the initial reference will be known.
<code>obj</code>	A non-null object reference.

```
void send_multiple_requests_deferred(const  
CORBA::RequestSeq& req);
```

This method sends all the client requests in the specified sequence as deferred requests. The ORB will not wait for any responses from the object implementation. The client application is responsible for retrieving the responses to each request using the `ORB::get_next_response` method.

Parameter	Description
<code>req</code>	A sequence of deferred requests to be sent.

```
void send_multiple_requests_oneway(const  
CORBA::RequestSeq& req);
```

This method sends all the client requests in the specified sequence as one-way requests. The ORB does not wait for a response from any of the requests because one-way requests do not generate responses from the object implementation.

Parameter	Description
<code>req</code>	A sequence of one-way requests to be sent.

```
CORBA::Object_ptr string_to_object(const char *str);
```

This method converts a string representing an object into an object pointer. The string must have been created using the `ORB::object_to_string` method.

Parameter	Description
<code>str</code>	A pointer to a string representing an object.

```
static CORBA::ORB_ptr _duplicate(CORBA::ORB_ptr ptr);
```

This static method duplicates the specified ORB pointer and returns a pointer to the duplicated ORB.

Parameter	Description
<code>ptr</code>	The ORB pointer to be duplicated.

```
static CORBA::ORB_ptr _nil();
```

This static method returns a NULL ORB pointer suitable for initialization purposes.

```
void run();
```

This method causes the ORB to start processing work. This ORB receives requests and dispatches them. This call blocks this process until the ORB is shut down.

```
static void shutdown(CORBA::Boolean
    wait_for_completion=0);
```

This method causes a previous invocation of the `impl_is_ready` method to return. All object adapters are shut down and associated memory is freed. If the `wait_for_completion` parameter is `TRUE`, this operation blocks until the shutdown is complete. If an application does this in a thread that is currently servicing an invocation, the `BAD_INV_ORDER` system exception is raised. If the `wait_for_completion` parameter is `FALSE`, then shutdown may not have completed upon return.

Parameter	Description
<code>wait_for_completion</code>	Specifies whether shutdown will wait for completion or not

```
static void destroy();
```

This operation destroys the ORB so that its resources can be reclaimed by the application. If `destroy` is called on an ORB that has not been shut down, it will start the shut down process and block until the ORB has shut down before it destroys the ORB. The behavior is similar to that achieved by calling `shutdown` with the `wait_for_completion` parameter set to `TRUE`. If an application calls `destroy` in a thread that is currently servicing an invocation, the `BAD_INV_ORDER` system exception is raised.

VisiBroker extensions to CORBA::ORB

```
CORBA::Object_ptr bind(
    const char *rep_id,
    const char *object_name =
        (const char*)NULL, const char *host_name =
        (const char*)NULL, CORBA::BindOptions *opt =
        (CORBA::BindOptions*)NULL);
```

This method allows you obtain a generic object reference to an object by specifying the repository id of the object and optionally, its object name and host name where it is implemented.

Parameter	Description
<code>rep_id</code>	The identifier generated by the IDL compiler or constructed dynamically for the object.
<code>object_name</code>	The name of the object. This is an optional parameter.
<code>host_name</code>	The host name where the object implementation is located. This may be specified as an IP address or as a fully qualified host name. This is an optional parameter.
<code>opt</code>	Any bind options for the object. This is an optional parameter. Bind options are described in "BindOptions" on page 7 .

```
CORBA::ULong connection_count()
```

This method is used by client applications to return the current number of active connections.

```
void connection_max(CORBA::ULong max_conn)
```

Client applications use this method to set the maximum number of connections allowed.

Parameter	Description
<code>max_conn</code>	The maximum number of connections to be allowed.

```
CORBA::ULong connection_max()
```

Client applications use this method to obtain the maximum number of connections allowed.

```
static CORBA::TypeCode_ptr create_wstring_tc(  
    CORBA::ULong bound);
```

This static method dynamically creates a TypeCode for a Unicode string.

Parameter	Description
<code>bound</code>	The maximum length of the string.

PortableServer::POA

```
class PortableServer::POA
```

Objects of the POA class manage the implementations of a collection of objects. The POA supports a namespace for these objects which are identified by Object Ids. A POA also provides a namespace for other POAs in that a POA must be created as a child of an existing POA, which then forms a hierarchy starting with the root POA.

A POA object must not be exported to other processes or be stringified. A `MARSHAL` exception is raised if this is attempted.

PortableServer::POA methods

```
PortableServer::ObjectId* activate_object(  
    PortableServer::Servant _p_servant);
```

This method generates an object id and returns it. The object id and the specified `_p_servant` are entered into the Active Object Map. If the `UNIQUE_ID` policy is present with the POA and the specified `_p_servant` is already in the Active Object Map, then a `ServantAlreadyActive` exception is raised.

This method requires that the `SYSTEM_ID` and `RETAIN` policies be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_p_servant</code>	The Servant to be entered into the Active Object Map.

```
void activate_object_with_id(  
    const PortableServer::ObjectId& _oid,  
    PortableServer::Servant _p_servant);
```

This method attempts to activate the specified `_oid` and to associate it with the specified `_p_servant` in the Active Object Map. If the `_oid` already has a servant bound to it in the Active Object Map, then an

ObjectAlreadyActive exception is raised. If the POA has the UNIQUE_ID policy present and the `_p_servant` is already in the Active Object map, then a ServantAlreadyActive exception is raised.

If the POA has the SYSTEM_ID policy present and it detects that the `_oid` was not generated by the system or for the POA, then this method raises a BAD_PARAM system exception.

This method requires that the RETAIN policy be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
<code>_oid</code>	The ObjectId of the object to be activated.
<code>_p_servant</code>	The Servant to be entered into the Active Object Map.

```
PortableServer::ImplicitActivationPolicy_ptr  
create_implicit_activation_policy(  
    PortableServer::ImplicitActivationPolicyValue _value);
```

This method returns a pointer to an `ImplicitActivationPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after the `Policy` object is no longer needed.

If no `ImplicitActivationPolicy` is specified at POA creation, then the default is `NO_IMPLICIT_ACTIVATION`.

Parameter	Description
<code>_value</code>	If set to <code>IMPLICIT_ACTIVATION</code> , the POA implicitly activates servants: also requires <code>SYSTEM_ID</code> and <code>RETAIN</code> policies. If set to <code>NO_IMPLICIT_ACTIVATION</code> , the POA will not implicitly activate servants.

```
CORBA::Object_ptr create_reference(const char* _intf);
```

This method creates and returns an object reference that encapsulates a POA-generated `ObjectId` and the specified `_intf` values. The `_intf`, which may be null, becomes the `type_id` of the generated object reference. This method does not cause an activation to take place. Undefined behavior results if the `_intf` value does not identify the most derived interface of the object or one of its base interfaces. The `ObjectId` may be obtained by invoking the `POA::reference_to_id` method on the returned `Object`.

This method requires that the RETAIN policy be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
<code>_intf</code>	The repository interface id of the class of the object to be created.

```
CORBA::Object_ptr create_reference_with_id (  
    const PortableServer::ObjectId& _oid, const char* _intf);
```

This method creates and returns an object reference that encapsulates the specified `_oid` and `_intf` values. The `_intf`, which may be a null string, becomes the `type_id` of the generated object reference. An `_intf` value that does not identify the most derived interface of the object or one of its base interfaces will result in undefined behavior. This method does not cause an activation to take place. The returned object reference may be

passed to clients, so that subsequent requests on those references will cause the object to be activated if necessary, or the default servant used, depending on the applicable policies.

If the POA has the `SYSTEM_ID` policy present and it detects the `ObjectId` value was not generated by the system or for the POA, this method may raise a `BAD_PARAM` system exception.

Parameter	Description
<code>_oid</code>	The object id for which a reference is to be created.
<code>_intf</code>	The repository interface id of the class of the object to be created.

```
PortableServer::IdAssignmentPolicy_ptr  
create_id_assignment_policy (  
    PortableServer::IdAssignmentPolicyValue _value);
```

This method returns a pointer to an `IdAssignmentPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no `IdAssignmentPolicy` is specified at POA creation, then the default is `SYSTEM_ID`.

Parameter	Description
<code>_value</code>	If set to <code>USER_ID</code> , then objects created by the POA are assigned object ids only by the application. If set to <code>SYSTEM_ID</code> , then objects created by the POA are assigned object ids only by the POA.

```
PortableServer::IdUniquenessPolicy_ptr  
create_id_uniqueness_policy (  
    PortableServer::IdUniquenessPolicyValue _value);
```

This method returns a pointer to an `IdUniquenessPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no `IdUniquenessPolicy` is specified at POA creation, then the default is `UNIQUE_ID`.

Parameter	Description
<code>_value</code>	If set to <code>UNIQUE_ID</code> , then servants which are activated with the POA support exactly one object id. If set to <code>MULTIPLE_ID</code> , then a servant which is activated with the POA may support one or more object ids.

```
PortableServer::LifespanPolicy_ptr  
create_lifespan_policy (  
    PortableServer::LifespanPolicyValue _value);
```

This method returns a pointer to a `LifespanPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no `LifespanPolicy` is specified at POA creation, then the default is `TRANSIENT`.

Parameter	Description
<code>_value</code>	If set to <code>TRANSIENT</code> , then objects implemented in the POA cannot outlive the POA instance in which they were first created. Once a transient POA is deactivated, the use of any object references generated from it results in an <code>OBJECT_NOT_EXIST</code> exception being raised. If set to <code>PERSISTENT</code> , then the objects implemented in the POA can outlive any process in which they are first created.

```
PortableServer::POA_ptr create_POA(  
    const char* _adapter_name,  
    PortableServer::POAManager_ptr _a_POAManager,  
    const CORBA::PolicyList& _policies);
```

This method creates a new POA with the specified `_adapter_name`. The new POA is a child of the specified `_a_POAManager`. If a child POA with the same name already exists for the parent POA, a `PortableServer::AdapterAlreadyExists` exception is raised.

The specified `_policies` are associated with the new POA and are used to control its behavior.

Parameter	Description
<code>_adapter_name</code>	The name which specifies the new POA.
<code>_a_POAManager</code>	The parent POA object of the new POA.
<code>_policies</code>	A list of policies which are to apply to the new POA.

```
PortableServer::RequestProcessingPolicy_ptr  
create_request_processing_policy (  
    PortableServer::RequestProcessingPolicyValue _value);
```

This method returns a pointer to a `RequestProcessingPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no RequestProcessingPolicy is specified at POA creation, then the default is USE_ACTIVE_OBJECT_MAP_ONLY.

Parameter	Description
_value	If set to USE_ACTIVE_OBJECT_MAP_ONLY and the object id is not found in the Active Object Map, then an OBJECT_NOT_EXIST exception is returned to the client. (The RETAIN policy is also required.) If set to USE_DEFAULT_SERVANT and the object id is not found in the Active Object Map or the NON_RETAIN policy is present, and a default servant has been registered with the POA using the set_servant method, then the request is dispatched to the default servant. If no default servant has been registered, then an OBJ_ADAPTER exception is returned to the client. (The MULTIPLE_ID policy is also required.) If set to USE_SERVANT_MANAGER and the object id is not found in the Active Object Map or the NON_RETAIN policy is present, and a servant manager has been registered with the POA using the set_servant_manager method, then the servant manager is given the opportunity to locate a servant or raise an exception. If no servant manager has been registered, then an OBJ_ADAPTER is returned to the client.

```
PortableServer::ServantRetentionPolicy_ptr
  create_servant_retention_policy (
    PortableServer::ServantRetentionPolicyValue _value);
```

This method returns a pointer to a ServantRetentionPolicy object with the specified _value. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no ServantRetentionPolicy is specified at POA creation, then the default is RETAIN.

Parameter	Description
_value	If set to RETAIN, then the POA will retain active servants in its Active Object Map. If set to NON_RETAIN, then servants are not retained by the POA.

```
PortableServer::ThreadPolicy_ptr create_thread_policy(
  PortableServer::ThreadPolicyValue _value);
```

This method returns a pointer to a ThreadPolicy object with the specified _value. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no ThreadPolicy is specified at POA creation, then the default is ORB_CTRL_MODEL.

Parameter	Description
_value	If set to ORB_CTRL_MODEL, the ORB is responsible for assigning requests for an ORB-controlled POA to threads. In a multi-threaded environment, concurrent requests may be delivered using multiple threads. If set to SINGLE_THREAD_MODEL, then requests to the POA are processed sequentially. In a multi-threaded environment, all upcalls made by the POA to servants and servant managers are made in a manner that is safe for code that is multi-thread unaware.

```
void deactivate_object(const PortableServer::ObjectId&
    _oid);
```

This method causes the specified `_oid` to be deactivated. An `ObjectId` which has been deactivated continues to process requests until there are no more active requests for that `ObjectId`. An `ObjectId` is removed from the Active Object Map when all requests executing for that `ObjectId` have completed.

If a `ServantManager` is associated with the POA, then the `ServantActivator::etherealize` method is invoked with the `ObjectId` and the associated servant after the `ObjectId` has been removed from the Active Object map. Reactivation for the `ObjectId` blocks until etherealization, if necessary, has completed. However, the method does not wait for requests or etherealization to complete and always returns immediately after deactivating the specified `_oid`.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_oid</code>	The <code>ObjectId</code> of the object to be deactivated.

```
void destroy(
    CORBA::Boolean _etherealize_objects,
    CORBA::Boolean _wait_for_completion);
```

This method destroys this POA object and all of its descendant POAs. First the children are destroyed and finally the current container POA. If desired, later, a POA with that same name in the same process can be created.

Parameter	Description
<code>_etherealize_objects</code>	If <code>TRUE</code> , the POA has the <code>RETAIN</code> policy, and a servant manager has registered with the POA, then the <code>etherealize</code> method is called on each active object in the Active Object Map. The apparent destruction of the POA occurs before the <code>etherealize</code> method is called, and thus any <code>etherealize</code> method which attempts to invoke methods on the POA raises an <code>OBJECT_NOT_EXIST</code> exception.
<code>_wait_for_completion</code>	If <code>TRUE</code> and the current thread is not in an invocation context dispatched from some POA belonging to the same ORB as this POA, the <code>destroy</code> method only returns after all active requests and all invocations of <code>etherealize</code> have completed. If <code>FALSE</code> and the current thread is in an invocation context dispatched from some POA belonging to the same ORB as this POA, the <code>BAD_INV_ORDER</code> exception is raised and POA destruction does not occur.

```
PortableServer::POA_ptr find_POA(
    const char* _adapter_name, CORBA::Boolean
    _activate_it);
```

If the POA object on which this method is called is the parent of the POA with the specified `_adapter_name`, the child POA is returned.

Parameter	Description
<code>_adapter_name</code>	The name of the AdapterActivator associated with the POA.
<code>_activate_it</code>	If set to TRUE and no child POA of the POA specified by <code>_adapter_name</code> exists, then the POA's AdapterActivator, if not null, is invoked. If it successfully activates the child POA, then that POA is returned. Otherwise an AdapterNonExistent exception is raised.

```
PortableServer::Servant get_servant();
```

This method returns the default Servant associated with the POA. If no Servant has been associated with the POA, then a NoServant exception is raised.

This method requires that the `USE_DEFAULT_SERVANT` policy be present with the POA; otherwise, a WrongPolicy exception is raised.

```
PortableServer::ServantManager_ptr
    get_servant_manager();
```

This method returns a pointer to the ServantManager object associated with the POA. The result is null if no ServantManager is associated with the POA.

This method requires that the `USE_SERVANT_MANAGER` policy be present with the POA; otherwise, a WrongPolicy exception is raised.

```
CORBA::Object_ptr
    id_to_reference(PortableServer::ObjectId& _oid);
```

This method returns an object reference if the specified `_oid` value is currently active. If the `_oid` is not active, then an ObjectNotActive exception is raised.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
<code>_oid</code>	The ObjectId of the object for which a reference is to be returned.

```
PortableServer::Servant
    id_to_servant(PortableServer::ObjectId& _oid);
```

This method has three behaviors:

- If the POA has the `RETAIN` policy present and the specified `_oid` is in the Active Object Map, then it returns the servant associated with that object in the Active Object Map.
- If the POA has the `USE_DEFAULT_SERVANT` policy present and a default servant has been registered with the POA, it returns the default servant.
- Otherwise, an ObjectNotActive exception is raised.

This method requires that the `USE_DEFAULT_SERVANT` policy be present with the POA; if neither policy is present, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_oid</code>	The <code>ObjectId</code> of the object for which a servant is to be returned.

```
PortableServer::Servant
    reference_to_servant(CORBA::Object_ptr _reference);
```

This method has three behaviors:

- If the POA has the `RETAIN` policy and the specified `_reference` is present in the Active Object Map, then it returns the servant associated with that object in the Active Object Map.
- If the POA has the `USE_DEFAULT_SERVANT` policy present and a default servant has been registered with the POA, then it returns the default servant.
- Otherwise, it raises an `ObjectNotActive` exception.

This method requires that the `RETAIN` or `USE_DEFAULT_SERVANT` policies be present; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_reference</code>	The object for which a servant is to be returned.

```
PortableServer::ObjectId*
    reference_to_id(CORBA::Object_ptr _reference);
```

This method returns the `ObjectId` value encapsulated by the specified `_reference`. The invocation is valid only if the `_reference` was created by the POA on which the method is called. If the `_reference` was not created by the POA, a `WrongAdapter` exception is raised. The object denoted by the `_reference` parameter does not have to be active for this method to succeed.

Though the IDL specifies that a `WrongPolicy` exception may be raised by this method, it is simply declared for possible future extension.

Parameter	Description
<code>_reference</code>	The object for which an <code>ObjectId</code> is to be returned.

```
PortableServer::ObjectId* servant_to_id(
    PortableServer::Servant _p_servant);
```

This method has four possible behaviors:

- If the POA has the `UNIQUE_ID` policy present and the specified `_p_servant` is active, then the `ObjectId` associated with the `_p_servant` is returned.
- If the POA has the `IMPLICIT_ACTIVATION` policy present and either the POA has the `MULTIPLE_ID` policy present or the specified `_p_servant` is not active, then the `_p_servant` is activated using the POA-generated `ObjectId` and the repository interface id associated with the `_p_servant`, and that `ObjectId` is returned.

- If the POA has the `USE_DEFAULT_SERVANT` policy present, the specified `_p_servant` is the default servant, then the `ObjectId` associated with the current invocation is returned.
- Otherwise, a `ServantNotActive` exception is raised.

This method requires that the `USE_DEFAULT_SERVANT` policy or a combination of the `RETAIN` policy and either the `UNIQUE_ID` or `IMPLICIT_ACTIVATION` policies be present; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_p_servant</code>	The Servant for which the <code>ObjectId</code> to be returned is desired.

```
CORBA::Object_ptr
servant_to_reference (PortableServer::Servant
_p_servant);
```

This method has the following possible behaviors:

- If the POA has both the `RETAIN` and the `UNIQUE_ID` policies present and the specified `_p_servant` is active, then an object reference encapsulating the information used to activate the servant is returned.
- If the POA has both the `RETAIN` and the `IMPLICIT_ACTIVATION` policies present and either the POA has the `MULTIPLE_ID` policy or the specified `_p_servant` is not active, then the `_p_servant` is activated using a POA-generated `ObjectId` and repository interface id associated with the `_p_servant`, and a corresponding object reference is returned.
- If this method was invoked in the context of executing a request on the specified `_p_servant`, the reference associated with the current invocation is returned.
- Otherwise, a `ServantNotActive` exception is raised.

This method requires the presence of the `RETAIN` policy and either the `UNIQUE_ID` or `IMPLICIT_ACTIVATION` policies if invoked outside the context of a method dispatched by the POA. If this method is not invoked in the context of executing a request on the specified `_p_servant` and one of these policies is not present, then a `WrongPolicy` exception is raised.

Parameter	Description
<code>_p_servant</code>	The Servant for which a reference is to be returned.

```
void set_servant (PortableServer::Servant _p_servant);
```

This method sets the default `Servant` associated with the POA. The specified `Servant` will be used for all requests for which no servant is found in the Active Object Map.

This method requires that the `USE_DEFAULT_SERVANT` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_p_servant</code>	The Servant to be used as the default associated with the POA.

```
void set_servant_manager  
  (PortableServer::ServantManager_ptr _imagr);
```

This method sets the default `ServantManager` associated with the POA. This method may only be invoked after a POA has been created. Attempting to set the `ServantManager` after one has already been set raises a `BAD_INV_ORDER` exception.

This method requires that the `USE_SERVANT_MANAGER` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_imagr</code>	The <code>ServantManager</code> to be used as the default used with the POA.

```
PortableServer::AdapterActivator_ptr the_activator();
```

This method returns the `AdapterActivator` associated with the POA. When a POA is created, it does not have an `AdapterActivator` (i.e., the attribute is null). It is system dependent whether a root POA has an activator and the application can assign one as it wishes.

```
void the_activator(PortableServer::AdapterActivator_ptr  
  _val);
```

This method sets the `AdapterActivator` object associated with the POA to the one specified.

Parameter	Description
<code>_val</code>	The <code>ActivatorAdapter</code> to be associated with the POA.

```
char* the_name();
```

This method returns the read-only attribute which identifies the POA relative to its parent. This parent is assigned at POA creation. The name of the root POA is system dependent and should not be relied upon by the application.

```
PortableServer::POA_ptr the_parent();
```

This method returns a pointer to the POA's parent POA. The parent of the root POA is null.

```
PortableServer::POAManager_ptr the_POAManager();
```

This method returns the read-only attribute which is a pointer to the `POAManager` associated with the POA.


PortableServer::POAManager

Each POA has an associated POA manager which in turn may be associated with one or more POA objects. A POA manager encapsulates the processing state of the POAs with which it is associated.

There are four possible states which a POA manager can be in:

- active
- inactive
- holding
- discarding

A POA manager is created in the holding state. The figure below illustrates the states which a POA manager transitions to based on the method called.

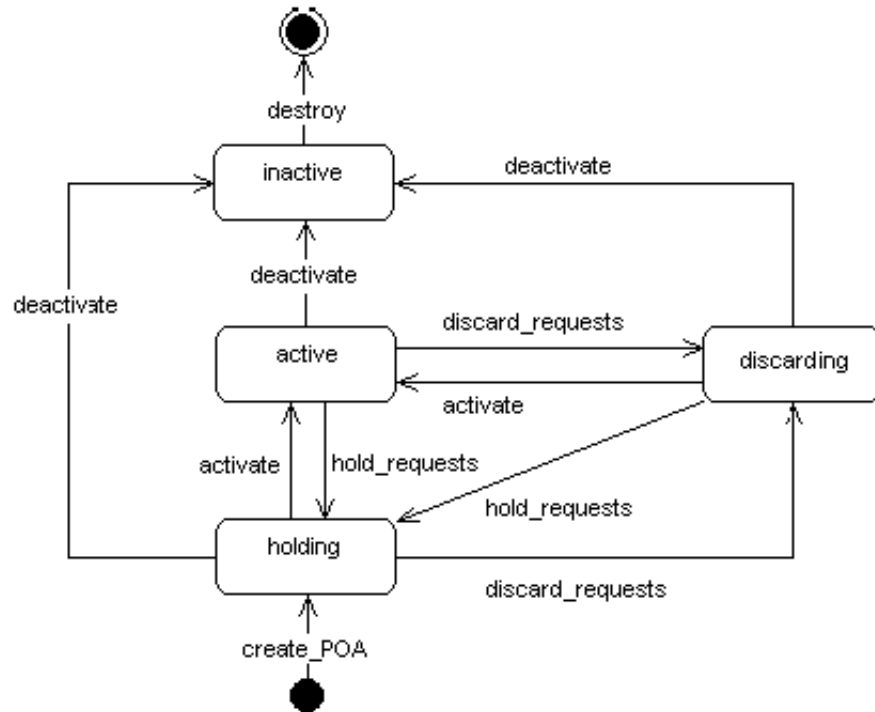

Include file

You should include the file **poa_c.hh** when using this class.

PortableServer::POAManager methods

```
void activate();
```

This method changes the state of the POA manager to active, which enables the associated POAs to process requests. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

```
void deactivate(CORBA::Boolean _etherealize_objects,
               CORBA::Boolean _wait_for_completion);
```

This method changes the state of the POA manager to inactive, which causes the associated POAs to reject requests that have not begun execution, as well as any new requests. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

After the state changes, if the `etherealize_objects` parameter is

- **TRUE**- the POA manager causes all associated POAs that have the `RETAIN` and `USE_SERVANT_MANAGER` policies to perform the `etherealize` operation on the associated servant manager for all active objects.
- **FALSE** - the `etherealize` operation is not called. The purpose is to provide developers with a means to shut down POAs in a crisis (for example, unrecoverable error) situation.

If the `wait_for_completion` parameter is `FALSE`, this operation returns immediately after changing the state. If the parameter is `TRUE` and the current thread is not in an invocation context dispatched by some POA

belonging to the same VisiBroker ORB as this POA, this operation does not return until there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) and, in the case of a `TRUE` `etherealize_objects` parameter, all invocations of `etherealize` have completed for POAs having the `RETAIN` and `USE_SERVANT_MANAGER` policies. If the parameter is `TRUE` and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, the `BAD_INV_ORDER` exception is raised and the state is not changed.

```
void discard_requests (CORBA::Boolean  
    _wait_for_completion);
```

This method changes the state of the POA manager to discarding, which causes the associated POAs to discard incoming requests. In addition, any requests that have been queued but have not started executing are discarded. When a request is discarded, a `TRANSIENT` system exception is returned to the client. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

If the `_wait_for_completion` parameter is `FALSE`, this operation returns immediately after changing the state. If the parameter is `TRUE` and the current thread is not in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, this operation does not return until either there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) or the state of the POA manager is changed to a state other than discarding. If the parameter is `TRUE` and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, the `BAD_INV_ORDER` exception is raised and the state is not changed.

```
void hold_requests (CORBA::Boolean  
    _wait_for_completion);
```

This method changes the state of the POA manager to holding, which causes the associated POAs to queue incoming requests. Any requests that have been queued but are not executing will continue to be queued while in the holding state. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

If the `_wait_for_completion` parameter is `FALSE`, this operation returns immediately after changing the state. If the parameter is `TRUE` and the current thread is not in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, this operation does not return until there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) and, in the case of a `TRUE` `etherealize_objects` parameter, all invocations of `etherealize` have completed for POAs having the `RETAIN` and `USE_SERVANT_MANAGER` policies. If the parameter is `TRUE` and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA the `BAD_INV_ORDER` exception is raised and the state is not changed.

Principal

Deprecated feature

```
typedef OctetSequence Principal
```

This feature is deprecated as of VisiBroker 4.0. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For support of the current CORBA specification support, Micro Focus recommends using POAs. See "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

The `Principal` is used to represent the client application on whose behalf a request is being made. An object implementation can accept or reject a bind request, based on the contents of the client's `Principal`.

Include file

You should include the file `corba.h` when using this typedef.

Principal methods

The BOA class provides the `get_principal` method, which returns a pointer to the `Principal` associated with an object. The Object class also provides methods for getting and setting the `Principal`.

PortableServer::RefCountServantBase

```
class RefCountServantBase : public ServantBase
```

This class can be used as a standard servant reference counting mix-in class, rather than the `PortableServer::ServantBase` class which is to be used with inheritance class. (Also see "[PortableServer::ServantBase](#)" on [page 43](#).)

Include file

You should include the file `poa_c.hh` when using this class.

PortableServer::RefCountServantBase methods

```
void _add_ref();
```

This method increments the reference count by one. You can use this method from the base class to provide true reference counting.

```
void _remove_ref();
```

This method decrements the reference count by one. You can override this method from the base class to provide true reference counting.

PortableServer::ServantActivator

```
class PortableServer::ServantActivator : public
    PortableServer::ServantManager
```

If the POA has the RETAIN policy present, then it uses servant managers that are PortableServer::ServantActivator objects.

Include file

You should include the file `poa_c.hh` when using this class.

PortableServer::ServantActivator methods

```
void etherealize(PortableServer::ObjectId& oid,
    PortableServer::POA_ptr adapter,
    PortableServer::Servant serv,
    CORBA::Boolean cleanup_in_progress,
    CORBA::Boolean remaining_activations);
```

This method is called by the specified `adapter` whenever a servant for an object (the specified `oid`) is deactivated, assuming that the RETAIN and USE_SERVANT_MANAGER policies are present.

Parameter	Description
<code>oid</code>	The object id of the object whose servant is to be deactivated.
<code>adapter</code>	The POA in whose scope the object was active.
<code>serv</code>	The servant which is to be deactivated.
<code>cleanup_in_progress</code>	If set to TRUE, the reason for the invocation of the method is either that the deactivate or destroy method was called with the <code>etherealize_objects</code> parameter set to TRUE; otherwise, the method was called for other reasons.
<code>remaining_activations</code>	If the specified <code>serv</code> is associated with other objects in the specified <code>adapter</code> it is set to TRUE; otherwise it is FALSE.

```
PortableServer::Servant incarnate(const
    PortableServer::ObjectId& oid, PortableServer::POA_ptr
    adapter);
```

This method is called by the POA whenever the POA receives a request for an inactive object (the specified `oid`) assuming that the RETAIN and USE_SERVANT_MANAGER policies are present.

The user supplies a servant manager implementation which is responsible for locating and creating an appropriate servant that corresponds to the specified `oid` value. The method returns a servant, which is also entered into the Active Object map. Any further requests for the active object are passed directly to the servant associated with it without invoking the servant manager.

If this method returns a servant that is already active for a different object id and if the POA also has the `UNIQUE_ID` policy present, then it raises the `OBJ_ADAPTER` exception.

Parameter	Description
<code>oid</code>	The object id of the object whose servant is to be activated.
<code>adapter</code>	The POA in whose scope the object is to be activated.

PortableServer::ServantBase

```
class PortableServer::ServantBase
```

The `Portable::ServantBase` class is the base class for your server application.

Include file

You should include the file `poa_c.hh` when using this class.

PortableServer::ServantBase methods

```
void _add_ref();
```

This method adds a reference count for this servant. It should be overridden to provide reference counting functionality for classes derived from this class as the default implementation does nothing.

```
PortableServer::POA_ptr _default_POA();
```

This method returns an Object reference to the root POA of the default VisiBroker ORB in the current process, (i.e., the same return value as an invocation of `ORB::resolve_initial_references("RootPOA")` on the default VisiBroker ORB. Classes derived from the `PortableServer::ServantBase` class may override this method to return the POA of their choice, if desired.

```
CORBA::InterfaceDef_ptr _get_interface();
```

This method returns a pointer to this object's interface definition. See ["Interface repository interfaces and classes \(C++\)"](#) for more information.

```
CORBA::Boolean _is_a(const char *rep_id);
```

This method returns `TRUE` if this servant implements the interface associated with the repository id. Otherwise, it returns `FALSE`.

Parameter	Description
<code>rep_id</code>	The repository identifier against which to check.

```
void _remove_ref();
```

This method removes a reference count for this servant. It should be overridden to provide reference counting functionality for classes derived from this class as the default implementation does nothing.

PortableServer::ServantLocator

```
class PortableServer::ServantLocator : public
    PortableServer::ServantManager
```

When the POA has the `NON_RETAIN` policy present, it uses servant managers which are `PortableServer::ServantLocator` objects. The servant returned by the servant manager will be used only for a single request.

Because the POA knows that the servant returned by the servant manager will be used only for a single request, it can supply extra information for the servant manager's methods and the servant manager's pair of methods may do something different than a `PortableServer::ServantLocator` servant manager.

Include file

You should include the file `poa_c.hh` when using this class.

PortableServer::ServantLocator methods

```
PortableServer::Servant preinvoke(const
    PortableServer::ObjectId& oid,
    PortableServer::POA_ptr adapter, const char*
    operation, Cookie& the_cookie);
```

This method is called by the POA whenever the POA receives a request for an object that is not currently active, assuming that the `NON_RETAIN` and `USE_SERVANT_MANAGER` policies are present.

The user-supplied implementation of the servant manager is responsible for locating or creating an appropriate servant that corresponds to the specified `oid` value if possible.

Parameter	Description
<code>oid</code>	The <code>ObjectId</code> value that is associated with the incoming request.
<code>adapter</code>	The POA in which the object is to be activated.
<code>operation</code>	The name of the operation which will be called by the POA when the servant is returned.
<code>the_cookie</code>	An opaque value which can be set by the servant manager to be used later in the <code>postinvoke</code> method.

```
void postinvoke(const PortableServer::ObjectId&
    oid, PortableServer::POA_ptr adapter,
    const char* operation, Cookie the_cookie,
    PortableServer::Servant the_servant)
```

If the POA has the `NON_RETAIN` and `USE_SERVANT_MANAGER` policies present, this method is called whenever a servant completes a request. This method is considered to be part of the request on an object, (i.e., if the method finishes normally, but `postinvoke` raises a system exception, then the method's normal return is overridden; and the request completes with the exception).

Destroying a servant that is known to a POA can lead to undefined results.

Parameter	Description
<code>oid</code>	The <code>ObjectId</code> value that is associated with the incoming request.
<code>adapter</code>	The POA in which the object is to be activated.
<code>operation</code>	The name of the operation which will be called by the POA when the servant is returned.
<code>the_cookie</code>	An opaque value which can be set by the servant manager in the <code>preinvoke</code> method for use in this method.
<code>the_servant</code>	The servant associated with the object.

PortableServer::ServantManager

```
class PortableServer::ServantManager
```

Servant managers are associated with Portable Object Adapters (POAs). A servant manager allows a POA to activate objects on demand when the POA receives a request targeted for an inactive object.

The `PortableServer::ServantManager` class has no methods; rather it is the base class for two other classes: the `PortableServer::ServantActivator` and the `PortableServer::ServantLocator` classes. For more details, see [“PortableServer::ServantActivator” on page 42](#) and [“PortableServer::ServantLocator” on page 44](#). The use of these two classes depends on the POA's policies: `RETAIN` for the `PortableServer::ServantActivator` and `NON_RETAIN` for the `PortableServer::ServantLocator`.

Include file

You should include the file `poa_c.hh` when using this class.

SystemException

```
class CORBA::SystemException : public CORBA::Exception
```

The `SystemException` class is used to report standard system errors encountered by the VisiBroker ORB or by the object implementation. This class is derived from the `Exception` class, described in [“Exception” on page 17](#), which provides methods for printing the name and details of the exception to an output stream.

`SystemException` objects include a completion status which indicates if the operation that caused the exception was completed. `SystemException` objects also have a minor code that can be set and retrieved.

Include file

The `corba.h` file should be included when you use this class.

SystemException methods

```
CORBA::SystemException(CORBA::ULong minor = 0,  
CORBA::CompletionStatus status =  
CORBA::COMPLETED_NO);
```

This method creates a SystemException object with the specified properties.

Parameter	Description
minor	The minor code.
status	The completion status, one of CORBA::COMPLETED_YES, CORBA::COMPLETED_NO, or CORBA::COMPLETED_MAYBE.

```
CORBA::CompletionStatus completed() const;
```

This method returns TRUE if this object's completion status is set to COMPLETED_YES.

```
void completed(CORBA::CompletionStatus status);
```

This method sets the completion status for this object.

Parameter	Description
status	The completion status, one of COMPLETED_YES, COMPLETED_NO, or COMPLETED_MAYBE.

```
CORBA::ULong minor() const;
```

This method returns this object's minor code.

```
void minor(CORBA::ULong val);
```

This method sets the minor code for this object.

Parameter	Description
val	The minor code.

```
static CORBA::SystemException *_downcast  
(CORBA::Exception *exc);
```

This method attempts to downcast the specified Exception pointer to a SystemException pointer. If the supplied pointer points to a SystemException object or an object derived from SystemException, a pointer to the object is returned. If the supplied pointer does not point to a SystemException object, a NULL pointer is returned.

Parameter	Description
exc	An Exception pointer to be down casted.

Note

The reference count for the `Exception` object is not incremented by this method.

Exception name	Description
<code>BAD_INV_ORDER</code>	Routine invocations out of order.
<code>BAD_OPERATION</code>	Invalid operation.
<code>BAD_CONTEXT</code>	Error processing context object.
<code>BAD_PARAM</code>	An invalid parameter was passed.
<code>BAD_TYPECODE</code>	Invalid typecode.
<code>COMM_FAILURE</code>	Communication failure.
<code>DATA_CONVERSION</code>	Data conversion error.
<code>FREE_MEM</code>	Unable to free memory.
<code>IMP_LIMIT</code>	Implementation limit violated.
<code>INITIALIZE</code>	ORB initialization failure.
<code>INTERNAL</code>	ORB internal error.
<code>INTF_REPOS</code>	Error accessing interface repository.
<code>INV_FLAG</code>	Invalid flag was specified.
<code>INV_INDENT</code>	Invalid identifier syntax.
<code>INV_OBJREF</code>	Invalid object reference specified.
<code>MARSHAL</code>	Error marshalling parameter or result.
<code>NO_IMPLEMENT</code>	Operation implementation not available.
<code>NO_MEMORY</code>	Dynamic memory allocation failure.
<code>NO_PERMISSION</code>	No permission for attempted operation.
<code>NO_RESOURCES</code>	Insufficient resources to process request.
<code>NO_RESPONSE</code>	Response to request not yet available.
<code>OBJ_ADAPTOR</code>	Failure detected by object adaptor.
<code>OBJECT_NOT_EXIST</code>	Object is not available.
<code>PERSIST_STORE</code>	Persistent storage failure.
<code>TRANSIENT</code>	Transient failure.
<code>UNKNOWN</code>	Unknown exception.

UserException

```
class CORBA::UserException : public CORBA::Exception
```

The `UserException` base class is used to derive the user exceptions that your object implementations may want to raise. This class is derived from the `Exception` class, described in [“Exception”](#), which provides methods for printing the name and details of the exception to an output stream.

`UserException` objects include a completion status which indicates if the operation that caused the exception was completed. `UserException` objects also have a minor code that can be set and retrieved.

Include file

The `corba.h` file should be included when you use this class.

UserException methods

This method creates a `UserException` object with the specified properties.

Parameter	Description
minor	The minor code.
status	The completion status, one of <code>CORBA::COMPLETED_YES</code> , <code>CORBA::COMPLETED_NO</code> , or <code>CORBA::COMPLETED_MAYBE</code> .

UserException derived classes

```
class AdapterAlreadyExists : public CORBA::UserException
class AdapterInactive : public CORBA::UserException
class AdapterNonExistent : public CORBA::UserException
class InvalidPolicy : public CORBA::UserException
class NoServant : public CORBA::UserException
class ObjectAlreadyActive : public CORBA::UserException
class ObjectNotActive : public CORBA::UserException
class ServantAlreadyActive : public CORBA::UserException
class ServantNotActive : public CORBA::UserException
class WrongAdapter : public CORBA::UserException
class WrongPolicy : public CORBA::UserException
class ManagerAlreadyExists : public CORBA::UserException
```


Dynamic interfaces and classes

This section describes the classes that support the `Dynamic Invocation Interface` used by client applications and the `Dynamic Skeleton Interface` used by object servers.

Any

The `CORBA::Any` class is used to represent an IDL type so that its value may be passed in a type-safe manner. Objects of this class have a pointer to a `TypeCode` that defines the object's type and a pointer to the value associated with the object. Methods are provided to construct, copy, and destroy an object as well as to initialize and query the object's type and value. In addition, streaming operators are provided to read and write the object to a stream.

The code sample below provides an example of how to create and use an `Any`.

```
// create an any object
CORBA::Any anObject;
// use the typeid operator to specify that
// 'anObject' object can store long
anObject <<= CORBA::_tc_long;
```

Include file

Include the `CORBA.h` file when you use this structure.

Any methods

```
CORBA::Any ();
```

This is the default constructor. It creates an empty `Any` object.

```
CORBA::Any (const CORBA::Any& val);
```

This is a copy constructor; it creates an `Any` object that is a copy of the specified target.

Parameter	Description
<code>val</code>	The object to be copied.

```
CORBA::Any (CORBA::TypeCode_ptr tc,
             void *value, CORBA::Boolean release = 0);
```

This constructor creates an `Any` object initialized with the specified value and `TypeCode`.

Parameter	Description
<code>tc</code>	The <code>TypeCode</code> of the value contained by this <code>Any</code> .

Parameter	Description
value	The value contained by this Any.
release	If set to TRUE, the memory associated with this Any object's value is released when this Any object is destroyed.

```
static CORBA::Any_ptr _duplicate(CORBA::Any_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to it.

Parameter	Description
ptr	The Any to be duplicated.

```
static CORBA::Any_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::Any_ptr *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The Any to be released.

Insertion operators

```
void operator<<=(CORBA::Short);
void operator<<=(CORBA::UShort);
void operator<<=(CORBA::Long);
void operator<<=(CORBA::ULong);
void operator<<=(CORBA::Float);
void operator<<=(CORBA::Double);
void operator<<=(const CORBA::Any&);
void operator<<=(const char *);
void operator<<=(CORBA::LongLong);
void operator<<=(CORBA::ULongLong);
void operator<<=(CORBA::LongDouble);
```

These operators initialize this object with the specified value, automatically setting the appropriate TypeCode for the value. If this Any object was constructed with the release flag set to TRUE, the value previously stored in this Any object is released before the new value is assigned.

```
void operator<<=(CORBA::TypeCode_ptr tc);
```

This method initializes this object with the specified TypeCode of the value.

Parameter	Description
tc	The TypeCode to set for this Any.

Extraction operators

```
CORBA::Boolean operator>>=(CORBA::Short&) const;
CORBA::Boolean operator>>=(CORBA::UShort&) const;
CORBA::Boolean operator>>=(CORBA::Long&) const;
```

```

CORBA::Boolean operator>>=(CORBA::ULong&) const;
CORBA::Boolean operator>>=(CORBA::Float&) const;
CORBA::Boolean operator>>=(CORBA::Double&) const;
CORBA::Boolean operator>>=(CORBA::Any&) const;
CORBA::Boolean operator>>=(const char *&) const;
CORBA::Boolean operator>>=(CORBA::LongLong&) const;
CORBA::Boolean operator>>=(CORBA::ULongLong&) const;
CORBA::Boolean operator>>=(CORBA::LongDouble&) const;

```

These operators store the value from this object into the specified target. If the `TypeCode` of the target does not match the `TypeCode` of the stored value, `FALSE` is returned and no value is extracted. Otherwise, the stored value is assigned to the target and `TRUE` is returned.

Deprecated operator

The following extraction operator is deprecated:

```

CORBA::Boolean operator>>=(char *&) const;

```

It is supported for backward compatibility, but Micro Focus recommend that where possible, you use an operator in the above list instead.

```

CORBA::Boolean operator>>=(CORBA::TypeCode_ptr& tc)
    const;

```

This method extracts the `TypeCode` of the value stored in this object.

Parameter	Description
<code>tc</code>	The object where the <code>TypeCode</code> for this <code>Any</code> is to be stored.

ContextList

```

class CORBA::ContextList

```

This class contains a list of contexts that may be associated with an operation request. See [“Request” on page 69](#) for more information.

ContextList methods

```

CORBA::ContextList();

```

This method constructs an empty `Context` list.

```

~CORBA::ContextList();

```

This method is the default destructor.

```

void add(const char *ctx);

```

This method adds the specified context to this object's list.

Parameter	Description
<code>ctx</code>	The context to be added to the list.

```

void add_consume(char *ctx);

```

This method adds the specified context code to this object's list. This `ContextList` becomes the owner of the context specified by the

argument. You should not attempt to access or free this Context after you invoke this method.

Parameter	Description
<code>ctx</code>	The context to be added to the list.

```
CORBA::ULong count () const;
```

This method returns the number of items currently stored in the list.

```
const char *item(CORBA::ULong index);
```

This method returns a pointer to the context that is stored in the list at the specified index. If the index is invalid, a NULL pointer is returned. You should not attempt to free the returned context. To remove a context, use the `remove` method instead.

Parameter	Description
<code>index</code>	The zero-based index of the context to be returned.

```
void remove(CORBA::ULong index);
```

This method removes the context with the specified index from the list. If the index is invalid, no removal will occur.

Parameter	Description
<code>index</code>	The zero-based index of the context to be removed.

```
static CORBA::ContextList_ptr  
  _duplicate(CORBA::ContextList_ptr ptr);
```

This static method increments the reference count for the object and then returns a pointer to it.

Parameter	Description
<code>ptr</code>	The object to be duplicated.

```
static CORBA::ContextList_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ContextList *ptr);
```

This static method decrements the reference count for this object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
<code>ptr</code>	The object to be released.

Dynamic Implementation

```
class PortableServer::DynamicImplementation : public
    PortableServer::ServantBase
```

This base class is used to derive object implementations that use the Dynamic Skeleton Interface instead of a skeleton class generated by the IDL compiler. You must provide implementations of the `invoke` and `_primary_interface()` methods when deriving from this class.

Dynamic Implementation methods

```
virtual void invoke(CORBA::ServerRequest_ptr request) =
    0;
```

This method is invoked by the POA whenever client operation requests are received for your object implementation. You must provide an implementation of this method which validates the `ServerRequest` object's contents, performs the necessary processing to fulfill the request, and returns the results to the client. For more information on the `ServerRequest` class, see [“ServerRequest” on page 72](#).

Parameter	Description
<code>request</code>	The <code>ServerRequest</code> object that represents the client's operation request.

```
virtual CORBA::RepositoryId _primary_interface(
    const PortableServer::ObjectId& oid
    PortableServer::POA_ptr poa) const;
```

This method will be invoked as a callback by the POA. The servants that inherit from the `DynamicImplementation` class must implement it. This method should be called directly or unpredictable behavior will result. Invoking this method under other circumstances may lead to unpredictable results. The `_primary_interface` method receives an `ObjectId` value and a `POA_ptr` as input parameters and returns a valid `RepositoryId` representing the most-derived interface for that `oid`.

DynAny

```
class DynamicAny::DynAny : public CORBA::LocalObject
```

A `DynAny` object is used by a client application or server to create and interpret data types at runtime which were not defined at compile time. A `DynAny` may contain a basic type (such as a `boolean`, `int`, or `float`) or a complex type (such as a `struct` or `union`). The type contained by a `DynAny` is defined when it is created and may not be changed during the lifetime of the object.

A `DynAny` object may represent a data type as one or more components, each with its own value. The `next`, `seek`, `rewind`, and `current_component` methods are provided to help you navigate through the components.

A `DynAnyFactory` is created by calling `ORB::resolve_initial_references("DynAnyFactory")`. The factory is then used to create basic or complex types. The `DynAnyFactory` belongs to the `DynamicAny` module.

DynAny objects for basic types are created using the `DynAnyFactory::create_dyn_any_from_type_code` method. A DynAny object may also be created and initialized from an Any object using the `DynAnyFactory::create_dyn_any` method.

The following interfaces are derived from `DynAny` and provide support for constructed types that are managed dynamically.

Constructed type	Interface
Array	<code>DynArray</code> in “DynArray” on page 57 .
Enumeration	<code>DynEnum</code> in “DynEnum” on page 58 .
Sequence	<code>DynSequence</code> in “DynSequence” on page 59 .
Structure	<code>DynStruct</code> in “DynStruct” on page 60
Union	<code>DynUnion</code> in “DynUnion” on page 61

Include file

The `dynany.h` file should be included when you use this class.

Important usage restrictions

`DynAny` objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `DynAny::to_any` method to convert a `DynAny` object into an `Any`, which can be used as a parameter.

DynAny methods

```
void assign(DynamicAny::DynAny_ptr dyn_any);
```

Initializes the value in this `DynAny` object from the specified `DynAny`.

A type mismatch exception is raised if the type contained in the `Any` does not match the type contained by this object.

```
DynamicAny::DynAny_ptr copy();
```

Returns a copy of this object.

```
virtual CORBA::ULong component_count();
```

Returns the number of components for the complex type stored inside the `DynAny` as an unsigned long.

```
virtual DynamicAny::DynAny_ptr current_component();
```

Returns the current component in this object.

```
virtual void destroy();
```

Destroys this object.

```
virtual CORBA::Boolean equal(const  
    DynamicAny::DynAny_ptr value);
```

Compares two `DynAny` values for equality. Returns `TRUE` if they are equal, `FALSE` otherwise.

```
virtual void from_any(const CORBA::Any& value);
```

Initializes the current component of this object from the specified Any object.

A type mismatch exception is raised if the TypeCode of value contained in the Any does not match the TypeCode that was defined for this object when it was created.

If the value parameter passed is not legal, the operation raises an InvalidValue exception.

Parameter	Description
value	An Any object containing the value to set for this object.

```
virtual CORBA::Boolean next();
```

Advances to the next component, if one exists, and returns TRUE. If there are no more components, this method returns FALSE.

```
virtual void rewind();
```

Sets the current component of this object to be the first component defined in this DynAny.

If this object contains only one component, invoking this method has no effect.

```
virtual CORBA::Boolean seek(CORBA::Long index);
```

Makes the component with the specified index the current component. If there is no component at the specified index, this method returns FALSE, otherwise it returns TRUE.

Parameter	Description
index	The zero-based index of the desired component.

```
virtual CORBA::Any* to_any();
```

Converts the DynAny object into an Any object and returns a pointer to the Any object.

```
CORBA::TypeCode_ptr type();
```

Returns the TypeCode of the value stored in the DynAny.

Extraction methods

The DynAny extraction methods return the type contained in this DynAny object's current component. The list below shows the name of each of the extraction methods.

A TypeMismatch exception is raised if the value contained in this DynAny does not match the expected return type for the extraction method used.

Extraction methods offered by the DynAny class are:

```
virtual CORBA::Any* get_any();  
virtual CORBA::Boolean get_boolean();  
virtual CORBA::Char get_char();  
virtual CORBA::Double get_double();  
virtual DynamicAny::DynAny* get_dyn_any();
```

```

virtual CORBA::Float get_float();
virtual CORBA::Long get_long();
virtual CORBA::LongLong get_longlong();
virtual CORBA::Octet get_octet();
virtual CORBA::Object_ptr get_reference();
virtual CORBA::Short get_short();
virtual char* get_string();
virtual CORBA::TypeCode_ptr get_typecode();
virtual CORBA::ULong get_ulong();
virtual CORBA::ULongLong get_ulonglong();
virtual CORBA::UShort get_ushort();
virtual CORBA::ValueBase* get_val();
virtual CORBA::WChar get_wchar();
virtual CORBA::WChar* get_wstring();

```

Solaris, AIX, HP-UX, and Linux 64-bit:

```

virtual CORBA::LongDouble get_longdouble();

```

Insertion methods

An insertion method copies a value of a particular type to this DynAny object's current component. Following is the list of methods provided for inserting various types.

These methods raise an InvalidValue exception if the inserted object's type does not match the DynAny object's type.

Insertion methods offered by the DynAny class are:

```

virtual void insert_any(const CORBA::Any& value);
virtual void insert_boolean(CORBA::Boolean value);
virtual void insert_char(CORBA::Char value);
virtual void insert_double(CORBA::Double value);
virtual void insert_dyn_any (const DynamicAny::DynAny_ptr
value);
virtual void insert_float(CORBA::Float value);
virtual void insert_long(CORBA::Long value);
virtual void insert_longlong(CORBA::LongLong value);
virtual void insert_octet(CORBA::Octet value);
virtual void insert_reference(CORBA::Object_ptr value);
virtual void insert_short(CORBA::Short value);
virtual void insert_string(const char* value);
virtual void insert_typecode(CORBA::TypeCode_ptr value);
virtual void insert_ulong(CORBA::ULong value);
virtual void insert_ulonglong(CORBA::ULongLong value);
virtual void insert_ushort(CORBA::UShort value);
virtual void insert_val(const CORBA::ValueBase& value);
virtual void insert_wchar(CORBA::WChar value);
virtual void insert_wstring(const CORBA::WChar* value);

```

Solaris, AIX, HP-UX, and Linux 64-bit:

```

virtual void insert_longdouble(CORBA::LongDouble value);
Solaris only

```


DynAnyFactory

```
class DynamicAny::DynAnyFactory : public  
CORBA::LocalObject
```

A `DynAnyFactory` object is used to create a new `DynAny` object. To obtain a reference to the `DynAnyFactory` object, call `ORB::resolve_initial_references("DynAnyFactory")`.

DynAnyFactory methods

```
DynAny_ptr create_dyn_any (const CORBA::Any& value);
```

Creates a `DynAny` object of the specified value

Parameter	Description
value	A new <code>DynAny</code> object of a specified value.

```
DynAny_ptr create_dyn_any_from_type_code  
(CORBA::TypeCode_ptr type);
```

Creates a `DynAny` object of the specified type.

Parameter	Description
type	The type of the new <code>DynAny</code> object.

DynArray

```
class DynamicAny::DynArray : public VISDynComplex
```

Objects of this class are used by a client application or server to create and interpret array data types at runtime which were not defined at compile time. A `DynArray` may consist of a sequence of basic types (such as a `boolean`, `int`, or `float`) or constructed types (such as `struct` or `union`). The type contained by a `DynArray` is defined when it is created and may not be changed during the lifetime of the object.

The `next`, `rewind`, `seek`, and `current_component` methods, inherited from `DynAny`, may be used to navigate through the components.

The `VISDynComplex` class is a helper class that allows the `VisiBroker` ORB to manage complex `DynAny` types.

Important usage restrictions

`DynArray` objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `DynAny::to_any` method to convert a `DynArray` object to a sequence of `Any` objects, which can be used as a parameter.

DynArray methods

```
virtual void destroy();
```

Destroys this object.

```
CORBA::AnySeq* get_elements ();
```

Returns a sequence of Any objects containing the values stored in this object.

```
void set_elements(const CORBA::AnySeq& _value);
```

Assigns the elements in the DynArray to those in the sequence specified by the value parameter.

```
DynamicAny::DynAnySeq* get_elements_as_dyn_any ();
```

Returns the elements contained in the DynAny as a DynAny sequence.

```
void set_elements_as_dyn_any (const  
    DynamicAny::DynAnySeq& value);
```

Sets the elements contained in the object from the specified DynAny sequence.

An InvalidValue exception is raised if the number of elements in value is not equal to the number of elements in this DynArray. A type mismatch exception is raised if the type of the Any values do not match the TypeCode of the DynAny.

Parameter	Description
<code>_value</code>	An array of Any objects whose values will be set in this DynArray.

DynEnum

```
class DynamicAny::DynEnum : public DynamicAny::DynAny
```

Objects of this class are used by a client application or server to create and interpret enumeration values at runtime which were not defined at compile time.

Since objects of this type contains a single component, the `DynAn::rewind` and `DynAny::next` methods of a `DynEnum` object always return `FALSE`.

Important usage restrictions

`DynEnum` objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `to_any` method to convert a `DynEnum` object to an `Any`, which can be used as a parameter.

DynEnum methods

```
void from_any(const CORBA::Any& value);
```

Initializes the value of this object using the specified Any object.

An Invalid exception is raised if the TypeCode of value contained in the Any does not match the TypeCode defined for this object when it was created.

Parameter	Description
value	An Any object.

```
CORBA::Any* to_any();
```

Returns an Any object containing the value of the current component.

```
char* get_as_string();
```

Returns the DynEnum object's value as a string.

```
void set_as_string(const char* value_as_string);
```

Sets the value of this DynEnum to the specified string.

Parameter	Description
value_as_string	A string that will be used to set the value in this DynEnum.

```
CORBA::ULong get_as_ulong();
```

Returns an unsigned long containing the DynEnum object's value.

```
void set_as_ulong(CORBA::ULong value_as_ulong)
```

Sets the value of this DynEnum to the specified CORBA::ULong.

Parameter	Description
value_as_ulong	An integer that will be used to set the value in this DynEnum.

DynSequence

```
class DynamicAny::DynSequence : public  
    DynamicAny::DynArray
```

Objects of this class are used by a client application or server to create and interpret sequence data types at runtime which were not defined at compile time. A DynSequence may contain a sequence of basic types (such as a boolean, int, or float) or constructed types (such as a struct or union). The type contained by a DynSequence is defined when it is created and may not be changed during the lifetime of the object.

The next, rewind, seek, and current_component methods may be used to navigate through the components.

Important usage restrictions

DynSequence objects cannot be used as parameters on operation requests or DII requests nor can they be externalized using the ORB::object_to_string method. However, you may use the to_any method to convert a DynSequence object to a sequence of Any objects. You can use the sequence of Any objects as a parameter.

DynSequence methods

```
CORBA::ULong get_length();
```

Returns the number of elements contained in this DynSequence.

```
void set_length(CORBA::ULong length);
```

Sets the number of elements contained in this DynSequence.

If you specify a length that is less than the current number of elements, the sequence is truncated.

Parameter	Description
length	The number of components to be contained in this DynSequence.

```
CORBA::AnySeq * get_elements();
```

Returns a sequence of Any objects containing the value stored in this object.

```
void set_elements (const AnySeq& _value)
```

Sets the elements within this object with specified sequence of Any objects.

```
set _elements_as_dyn_any();
```

See [“DynArray” on page 57](#) for more details.

```
get _elements_as_dyn_any();
```

See [“DynArray” on page 57](#) for more details.

DynStruct

```
class DynamicAny::DynStruct :public VISDynComplex
```

Objects of this class are used by a client application or server to create and interpret structures at runtime which were not defined at compile time.

The next, rewind, seek, and current_component methods may be used to navigate through the structure members.

You create an DynStruct object by invoking the DynAnyFactory::create_dyn_any_from_typecode method.

Important usage restrictions

DynStruct objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the ORB::object_to_string method. However, you may use the to_any method to convert a DynStruct object to an Any object, which can be used as a parameter.

DynStruct methods

```
void destroy();
```

Destroys this object.

```
CORBA::FieldName current_member_name() ;
```

Returns the member name of the current component.

```
CORBA::TCKind current_member_kind() ;
```

Returns the TypeCode associated with the current component.

```
DynamicAny::NameValuePairSeq get_members() ;
```

Returns the members of the structure as a sequence of NameValuePair objects.

```
void set_members(const DynamicAny::NameValuePairSeq&  
    value) ;
```

Sets the structure members from the array of NameValuePair objects.

```
DynamicAny::NameDynAnyPairSeq get_members_as_dyn_any() ;
```

Returns the members of the structure as a NameDynAnyPair sequence.

```
void set_members_as_dyn_any(const  
    DynamicAny::NameDynAnyPairSeq value) ;
```

Sets the structure members from NameDynAnyPair objects.

An InvalidValue exception is raised if the length of the value sequence is not equal to the number of members of DynStruct, and a TypeMismatch exception is raised when any of the element's typecode does not match that of the structure.

DynUnion

```
class DynamicAny::DynUnion : public VISDynComplex
```

This interface is used by a client application or server to create and interpret unions at runtime which were not defined at compile time. The DynUnion contains a sequence of two elements: the union discriminator and the actual member.

The next, rewind, seek, and current_component methods may be used to navigate through the components.

You create a DynUnion object by invoking the

```
DynamicAny::DynAnyFactory::create_dyn_any_from_type_code
```

method and passing a union type code as an argument.

Important usage restrictions

DynUnion objects cannot be used as parameters on operation requests or DII requests nor can they be externalized using the

```
ORB::object_to_string
```

method. However, you may use the DynAny::to_any method to convert a DynUnion object to an Any object which can be used as a parameter.

DynUnion methods

```
DynamicAny::DynAny_ptr get_discriminator() ;
```

Returns a DynAny object containing the discriminator for the union.

```
CORBA::TCKind discriminator_kind();
```

Returns the type code of the discriminator for the union.

```
DynamicAny::DynAny_ptr member();
```

Returns a `DynAny` object for the current component which represents a union member.

```
CORBA::TCKind member_kind();
```

Returns the type code for the current component, which represents a member in the union.

```
CORBA::FieldName member_name();
```

Returns the member name of the current component.

```
void set_discriminator (const DynamicAny::DynAny_ptr  
    value);
```

Sets the discriminator of this `DynUnion` to the specified value.

```
void set_to_default_member();
```

Sets the discriminator to a value that is consistent with the value of the default case of a union.

```
void set_to_no_active_member();
```

Sets the discriminator to a value that does not correspond to any of the union's case labels.

```
CORBA::Boolean has_no_active_member();
```

Returns `TRUE` if the union has no active member (that is, the union's value consists solely of its discriminator because the discriminator has a value that is not listed as an explicit case label).

Environment

```
class CORBA::Environment
```

The `Environment` class is used for reporting and accessing both system and user exceptions on platforms where C++ language exceptions are not supported. When an interface specifies that user exceptions may be raised by the object's methods, the `Environment` class becomes an explicit parameter of that method. If an interface does not raise any exceptions, the `Environment` class is an implicit parameter and is only used for reporting system exceptions. If an `Environment` object is not passed from the client to a stub, the default of per-object `Environment` is used.

Multithreaded applications have a global `Environment` object for each thread that is created. Applications that are not multithreaded have just one global `Environment` object.

Include file

You should include the `corba.h` file when you use this class.

Environment methods

```
void ORB::create_environment(COBRA::Environment_out ptr);
```

This method can be used to create a new Environment object.

Note

This method is provided for CORBA compliance. You may find it easier to use the constructor provided for this class or the C++ new operator.

Parameter	Description
ptr	The pointer will be set to point to the newly created object.

```
Environment();
```

This method creates an Environment object. This is equivalent to calling the ORB::create_environment method.

```
static COBRA::Environment& CORBA::current_environment();
```

This static method returns a reference to the global Environment object for the application process. In multithreaded applications, it returns the global Environment object for this thread.

```
void exception(COBRA::Exception *exp);
```

This method records the Exception object passed as an argument. The Exception object must be dynamically allocated because the specified object will assume ownership of the Exception object and will delete it when the Environment itself is deleted. Passing a NULL pointer to this method is equivalent to invoking the clear method on the Environment.

Parameter	Description
exp	A pointer to a dynamically allocated Exception object to be recorded for this Environment.

```
CORBA::Exception *exception() const;
```

This method returns a pointer to the Exception currently recorded in this Environment. You must not invoke delete on the Exception pointer returned by this call. If no Exception has been recorded, a NULL pointer is returned.

```
void clear();
```

This method deletes any Exception object that it holds. If this object holds no exception, this method has no effect.

ExceptionList

```
class CORBA::ExceptionList
```

This class contains a list of type codes that represent exceptions that may be raised by an operation request. See ["Request" on page 69](#).

ExceptionList methods

```
CORBA::ExceptionList ();
```

This method constructs an empty exception list.

```
CORBA::ExceptionList (CORBA::ExceptionList& list);
```

This is a copy constructor.

Parameter	Description
list	The list to be copied.

```
~CORBA::ExceptionList ();
```

This method is the default destructor.

```
void add (CORBA::TypeCode_ptr tc);
```

This method adds the specified exception type code to this object's list.

Parameter	Description
tc	The type code of an exception to be added to the list.

```
void add_consume (CORBA::TypeCode_ptr tc);
```

This method adds the specified exception type code to this object's list. Ownership of the passed argument is assumed by this `ExceptionList`. You should not attempt to access or free the argument after invoking this method.

Parameter	Description
tc	The type code of an exception to be added to the list.

```
CORBA::ULong count () const;
```

This method returns the number of items currently stored in the list.

```
CORBA::TypeCode_ptr item (CORBA::ULong index);
```

This method returns a pointer to the `TypeCode` stored in the list at the specified index. If the index is invalid, a `NULL` pointer is returned. You should not attempt to access or free the argument after invoking this method. To remove a `TypeCode` from the list, use the `remove` method.

Parameter	Description
index	The zero-based index of the type code to be returned.

```
void remove (CORBA::long index);
```

This method removes the `TypeCode` with the specified index from the list. If the index is invalid, no removal occurs.

Parameter	Description
index	The index of the type code to be removed. The index is zero-based.


```
static CORBA::ExceptionList_ptr _duplicate(  
    CORBA::ExceptionList_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::ExceptionList_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ExceptionList *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

NamedValue

```
class CORBA::NamedValue
```

The NamedValue class is used to represent a name-value pair used as a parameter or return value in a Dynamic Invocation Interface request. Objects of this class are grouped into an NVList, described in [“NVList” on page 66](#). The value of the name-value pair is represented by using an Any object. The Request class is described in [“Request” on page 69](#).

Include file

You should include the file **corba.h** when using this class.

NamedValue methods

```
CORBA::Flags flags() const;
```

This method returns the flag defining how this name-value pair is to be used. It returns one of the following:

ARG_IN	The name-value pair is used as an input parameter.
ARG_OUT	The name-value pair is used as an output parameter.
ARG_INOUT	The name-value pair is used both as an input and an output parameter.
IN_COPY_VALUE	When combined with the ARG_INOUT flag, this flag indicates that the ORB copies the output parameter. This allows the ORB to release memory associated with this parameter without impacting the client application's memory.

```
const char *name() const;
```

This method returns the name portion of this object's name-value pair. You should never release the storage pointed to by the return argument.

```
CORBA::Any *value() const;
```

This method returns the value portion of this object's name-value pair. You should never release the storage pointed to by the return argument.

```
static CORBA::NamedValue_ptr  
  _duplicate(CORBA::NamedValue_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to it.

Parameter	Description
<code>ptr</code>	The object to be duplicated.

```
static CORBA::NamedValue_ptr _nil();
```

This static method returns a NULL pointer that can be used to initialize a `CORBA::NamedValue_ptr`.

```
static void _release(CORBA::NamedValue *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
<code>ptr</code>	The object to be released.

NVList

```
class CORBA::NVList
```

The `NVList` class is used to contain a list of `NamedValue` objects, described in [“NamedValue” on page 65](#). It is used to pass parameters associated with a Dynamic Invocation Interface request. The `Request` class is described in [“Request” on page 69](#).

Several methods are provided for adding items to the list. You should never release the storage pointed to by the return argument. Always use the `remove` method to delete an item from the list.

Include file

You should include the file `corba.h` when using this class.

NVList methods

```
CORBA::NamedValue_ptr add(CORBA::Flags flags);
```

This method adds a `NamedValue` object to this list, initializing only the flags. Neither the name or value of the added object are initialized. A pointer is returned which can be used to initialize the name and value attributes of the

NamedValue. You should never release the storage associated with the return argument.

Parameter	Description
flags	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
CORBA::NamedValue_ptr add_item(const char *name,  
CORBA::Flags flag);
```

This method adds a NamedValue object to this list, initializing the object's flag and name attributes. A pointer is returned which can be used to initialize the value attribute of the NamedValue.

Caution

You should never release the storage associated with the return argument.

Parameter	Description
name	The name.
flag	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
NamedValue_ptr add_item_consume(char *nm, CORBA::Flags  
flag);
```

This method is the same as the add_item method, except that the NVList takes over the management of the storage pointed to by nm. You will not be able to access nm after this method is called because the list may have copied and released it. When this item is removed, the storage associated with it is automatically freed.

Caution

You should never release the memory associated with this method's return value.

Parameter	Description
name	The name.
flag	The flag indicating the intended use of the NamedValue object. It must be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
CORBA::NamedValue_ptr add_value(const char *name, const  
CORBA::Any *value, CORBA::Flags flag);
```

This method adds a NamedValue object to this list, initializing the name, value, and flag. A pointer to the NamedValue object is returned.

Caution

You should never release the storage associated with the return argument.

Parameter	Description
name	The name.
value	The value.
flag	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
NamedValue_ptr add_value_consume(char *nm, CORBA::Any
    *value, CORBA::Flags flag);
```

This method is the same as the `add_value` method, except that the `NVList` takes over the management of the storage pointed to by `nm` and `value`. You will not be able to access `nm` or `value` after this method is called because the list may have copied and released them. When this list element is removed, the storage associated with it is automatically freed.

Parameter	Description
<code>nm</code>	The name.
<code>value</code>	The value.
<code>flag</code>	The flag indicating the intended use of the <code>NamedValue</code> object. It must be one of <code>ARG_IN</code> , <code>ARG_OUT</code> , or <code>ARG_INOUT</code> .

```
CORBA::Long count() const;
```

This method returns the number of `NamedValue` objects in this list.

```
static CORBA::Boolean CORBA::is_nil(NVList_ptr obj);
```

This method returns `TRUE` if the specified `NamedValue` pointer is `NULL`.

Parameter	Description
<code>obj</code>	The pointer to the object to be checked.

```
NamedValue_ptr item(CORBA::ULong index);
```

This method returns the `NamedValue` in the list with the specified index.

Caution

Never release the storage associated with the return argument.

Parameter	Description
<code>index</code>	The zero-based index of the desired <code>NamedValue</code> object.

```
static void CORBA::release(CORBA::NVList_ptr obj);
```

This static method releases the specified object.

Parameter	Description
<code>obj</code>	The object to be released.

```
void remove(CORBA::ULong index);
```

This method deletes the `NamedValue` object located at the specified index from this list. Storage associated with items in the list that were added using the `add_item_consume` or `add_value_consume` methods is released before the item is removed.

Parameter	Description
<code>index</code>	The index of the <code>NamedValue</code> object. Note that indexing is zero-based.

```
static CORBA::NVList_ptr _duplicate(CORBA::NVList_ptr  
ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::NVList_ptr _nil();
```

This static method returns a NULL pointer that can be used to initialize an NV_List pointer. For example, you might do something like this:
CORBA::NV_List_ptr p = CORBA::NVList::_nil();

```
static void _release(CORBA::NVList *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

Request

```
class CORBA::Request
```

The Request class is used by client applications to invoke an operation on an ORB object using the Dynamic Invocation Interface. A single ORB object is associated with a given Request object. The Request represents an operation that is to be performed on the ORB object. It includes the arguments to be passed, the Context, and an Environment object, if any. Methods are provided for invoking the request, receiving the response from the object implementation, and retrieving the result of the operation.

You can create a Request object by using the Object::_create_request. For more information, go to [“Core interfaces and classes”](#).

Note

A Request object retains ownership of all return parameters, so you should never attempt to free them.

Include file

Include the **corba.h** file when you use this class.

Request methods

```
CORBA::Any& add_in_arg();
```

This method adds an unnamed input argument to this Request and returns a reference to the Any object so that you can set its name, type, and value.

```
CORBA::Any& add_in_arg(const char *name);
```

This method adds a named input argument to this Request and returns a reference to the Any object so that you can set its type and value.

Caution

You should never release the memory associated with this method's return value.

Parameter	Description
name	The name of the input argument to be added.

```
CORBA::Any& add_inout_arg ();
```

This method adds an unnamed `inout` argument to this `Request` and returns a reference to the `Any` object so that you can set its name, type, and value.

```
CORBA::Any& add_inout_arg (const char *name);
```

This method adds a named `inout` argument to this `Request` and returns a reference to the `Any` object so that you can set its type and value.

Parameter	Description
name	The name of the <code>inout</code> argument to be added.

```
CORBA::Any& add_out_arg ();
```

This method adds an unnamed output argument to this `Request` and returns a reference to the `Any` object so that you can set its name, type, and value.

```
CORBA::Any& add_out_arg (const char *name);
```

This method adds a named output argument to this `Request` and returns a reference to the `Any` object so that you can set its type and value.

Parameter	Description
name	The name of the output argument to be added.

```
CORBA::NVList_ptr arguments ();
```

This method returns a pointer to an `NVList` object containing the arguments for this request. The pointer can be used to set or retrieve the argument values. For more information on `NVList`, see [“NVList” on page 66](#).

Caution

You should never release the memory associated with this method's return value.

```
CORBA::ContextList_ptr contexts ();
```

This method returns a pointer to a list of all the `Context` objects that are associated with this `Request`. For more information on the `Context` class, go to [“Core interfaces and classes”](#).

Caution

You should never release the memory associated with this method's return value.

```
CORBA::Context_ptr ctx() const;
```

This method returns a pointer to the `Context` associated with this request.

```
void ctx(CORBA::Context_ptr ctx);
```

This method sets the `Context` to be used with this request. For more information on the `Context` class, go to [“Core interfaces and classes”](#).

Parameter	Description
<code>ctx</code>	The <code>Context</code> object to be associated with this request.

```
CORBA::Environment_ptr env();
```

This method returns a pointer to the `Environment` associated with this request. For more information on the `Environment` class, go to [“Environment” on page 62](#).

```
CORBA::ExceptionList_ptr exceptions();
```

This method returns a pointer to a list of all the exceptions that this request may raise.

Caution

You should never release the memory associated with this method's return value.

```
void get_response();
```

This method is used after the `send_deferred` method has been invoked to retrieve a response from the object implementation. If there is no response available, this method blocks the client application until a response is received.

```
void invoke();
```

This method invokes this `Request` on the ORB object associated with this request. This method blocks the client until a response is received from the object implementation. This `Request` should be initialized with the target object, operation name and arguments before this method is invoked.

```
const char* operation() const;
```

This method returns the name of the operation that this request performs.

```
CORBA::Boolean poll_response();
```

This non-blocking method is invoked after the `send_deferred` method to determine if a response has been received. This method returns `TRUE` if a response has been received, otherwise it returns `FALSE`.

```
CORBA::NamedValue_ptr result();
```

This method returns a pointer to a `NamedValue` object where the return value for the operation will be stored. The pointer can be used to retrieve the result value after the request has been processed by the object implementation. For more information on the `NamedValue` class, go to [“NamedValue” on page 65](#).

```
CORBA::Any& return_value() ;
```

This method returns a reference to an Any object that represents the return value of this Request object.

```
void set_return_type(CORBA::TypeCode_ptr tc) ;
```

This method sets the TypeCode of the return value that is expected. You must set the return value's type before using the `invoke` method or one of the `send` methods.

Parameter	Description
<code>tc</code>	The return value's type.

```
void send_deferred() ;
```

Like the `invoke` method, this method sends this Request to the object implementation. Unlike the `invoke` method, this method does not block waiting for a response. The client application can retrieve the response using the `get_response` method.

```
void send_oneway() ;
```

This method invokes this Request as a *oneway* operation. Oneway operations do not block and do not result in a response being sent from the object implementation to the client application.

```
CORBA::Object_ptr target() const ;
```

This method returns a reference to the target object on which this request will operate.

```
static CORBA::Request_ptr  
  _duplicate(CORBA::Request_ptr ptr) ;
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
<code>ptr</code>	The object to be duplicated.

```
static CORBA::Request_ptr _nil() ;
```

This static method returns a NULL pointer that can be used to initialize a `CORBA::Request_ptr` object.

```
static void _release(CORBA::Request_ptr ptr) ;
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
<code>ptr</code>	The object to be released.

ServerRequest

The `ServerRequest` class is used to represent an operation request received by an object implementation that is using the Dynamic Skeleton

Interface. When the POA receives a client operation request, it invokes the object implementation's `invoke` method and passes an object of this type.

This class provides the methods needed by the object implementation to determine the operation being requested and the arguments. It also provides methods for setting the return value and reflecting exceptions to the client application.

You should never attempt to free memory associated with any value returned by this class.

Include file

The `corba.h` file should be included when you use this class.

ServerRequest methods

```
void arguments (CORBA::NVList_ptr param);
```

This method sets the parameter list for this request.

Parameter	Description
<code>params</code>	The parameter list to be filled in. You must initialize this list with the appropriate number of <code>Any</code> objects and set their type and flag values prior to invoking this method.

```
CORBA::Context_ptr ctx();
```

This method returns the `Context` object associated with the request.

Caution

You should never release the memory associated with this method's return value.

```
void exception (CORBA::Any_ptr exception);
```

This method is used to reflect the specified exception to the client application.

Parameter	Description
<code>exception</code>	The exception that was raised. If this pointer is <code>NULL</code> , a <code>CORBA::UnknownUserException</code> is reflected.

```
const char *operation() const;
```

Returns the name of the operation being requested.

```
const char* op_name() const
```

This method returns the name of the operation associated with the request. The object implementation uses this name to determine if the request is valid, to perform the appropriate processing to fulfill the request, and to return the appropriate value to the client.

```
void params(CORBA::NVList_ptr params);
```

This method accepts an NVList object initialized with the appropriate number of Any objects. The method fills the NVList in with the parameters supplied by the client.

Parameter	Description
params	The parameter list to be filled in. You must initialize this list with the appropriate number of Any objects and set their type and flag values prior to invoking this method.

```
void result(CORBA::Any_ptr result);
```

This method sets the result that is to be reflected to the client application.

Parameter	Description
result	An Any object representing the return value.

```
void set_exception(const CORBA::Any& a);
```

This method sets the exception that is to be reflected to the client application.

Parameter	Description
a	An Any object representing the exception.

```
void set_result(const CORBA::Any& a);
```

This method sets the result that is to be reflected to the client application.

Parameter	Description
a	An Any object representing the return value.

```
static CORBA::ServerRequest_ptr  
_duplicate(CORBA::ServerRequest_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to the object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::ServerRequest_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ServerRequest *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

TCKind

enum **TCKind**

This enumeration describes the various types that a `TypeCode` object, described in [“TypeCode” on page 76](#), may represent.

The values are shown in the following table.

Name	Meaning
<code>tk_abstract_interface</code>	abstract interface
<code>tk_alias</code>	alias
<code>tk_any</code>	Any
<code>tk_array</code>	array
<code>tk_boolean</code>	boolean
<code>tk_char</code>	char
<code>tk_double</code>	double
<code>tk_enum</code>	enum
<code>tk_except</code>	exception
<code>tk_fixed</code>	fixed type
<code>tk_float</code>	float
<code>tk_long</code>	long
<code>tk_longdouble</code>	long double
<code>tk_longlong</code>	long long
<code>tk_native</code>	native type
<code>tk_null</code>	NULL
<code>tk_objref</code>	object reference
<code>tk_octet</code>	octet string
<code>tk_Principal</code>	Principal
<code>tk_sequence</code>	sequence
<code>tk_short</code>	short
<code>tk_string</code>	string
<code>tk_struct</code>	struct
<code>tk_TypeCode</code>	TypeCode
<code>tk_ulonglong</code>	unsigned long long
<code>tk_union</code>	union
<code>tk_ulong</code>	unsigned long
<code>tk_ushort</code>	unsigned short
<code>tk_value</code>	value
<code>tk_value_box</code>	value box
<code>tk_void</code>	void
<code>tk_wchar</code>	Unicode character
<code>tk_wstring</code>	Unicode string

TypeCode

```
class CORBA::TypeCode
```

The `TypeCode` class represents the various types that can be defined in IDL. Type codes are most often used to define the type of value being stored in an Any object, described in [“Any” on page 49](#). Type codes may also be passed as parameters to method invocations.

`TypeCode` objects can be created using the various `CORBA::ORB.create_<type>_tc` methods, whose description begins in [“Core interfaces and classes”](#). You may also use the constructors listed here.

Include file

Include the `corba.h` file when you use this class.

TypeCode constructors

```
CORBA::TypeCode(CORBA::TCKind kind, CORBA::Boolean  
is_constant);
```

This method constructs a `TypeCode` object for types that do not require any additional parameters. A `BAD_PARAM` exception is raised if `kind` is not a valid type for this constructor.

Parameter	Description
<code>kind</code>	Describes the type of object being represented. Must be one of the following: <code>CORBA::tk_null</code> , <code>CORBA::tk_void</code> , <code>CORBA::tk_short</code> , <code>CORBA::tk_long</code> , <code>CORBA::tk_ushort</code> , <code>CORBA::tk_ulong</code> , <code>CORBA::tk_float</code> , <code>CORBA::tk_double</code> , <code>CORBA::tk_boolean</code> , <code>CORBA::tk_char</code> , <code>CORBA::tk_octet</code> , <code>CORBA::tk_any</code> , <code>CORBA::tk_TypeCode</code> , <code>CORBA::tk_Principal</code> , <code>CORBA::tk_longlong</code> , <code>CORBA::tk_ulonglong</code> , <code>CORBA::tk_longdouble</code> , or <code>CORBA::tk_wchar</code> , <code>CORBA::tk_fixed</code> , <code>CORBA::tk_value</code> , <code>CORBA::tk_value_box</code> , <code>CORBA::native</code> , <code>CORBA::tk_abstract_interface</code> .
<code>is_constant</code>	If <code>TRUE</code> , the type is to be considered a constant. Otherwise, the object is not a constant.

TypeCode methods

```
CORBA::TypeCode_ptr content_type() const;
```

This method returns the `TypeCode` of the elements in a sequence or array. It also will return the type of an alias. A `BadKind` exception is raised if this object's kind is not `CORBA::tk_sequence`, `CORBA::tk_array`, or `CORBA::tk_alias`.

```
CORBA::Long default_index() const;
```

This method returns the default index of a `TypeCode` representing a union. If this object's kind is not `CORBA::tk_union`, a `BadKind` exception is raised.

```
CORBA::TypeCode_ptr discriminator_type() const;
```

This method returns the discriminator type of a `TypeCode` representing a union. If this object's kind is not `CORBA::tk_union`, a `BadKind` exception is raised.

```
CORBA::Boolean equal(CORBA::TypeCode_ptr tc) const;
```

This method compares this object with the specified `TypeCode`. If they match in every respect, `TRUE` is returned. Otherwise, `FALSE` is returned.

Parameter	Description
<code>tc</code>	The object to be compared to this object.

```
const char* id() const;
```

This method returns the repository identifier of the type being represented by this object. If the type being represented does not have a repository identifier, a `BadKind` exception is raised. Types that have a repository identifier include:

- `CORBA::tk_struct`
- `CORBA::tk_union`
- `CORBA::tk_enum`
- `CORBA::tk_alias`
- `CORBA::tk_except`
- `CORBA::tk_objref`

```
CORBA::TCKind kind() const
```

This method returns this object's kind.

```
CORBA::ULong length() const;
```

This method returns the length of the string, sequence, or array represented by this object. The length of a string is the number of characters. The length of an array or sequence is the number of elements. A `BadKind` exception is raised if this object's kind is not `CORBA::tk_string`, `CORBA::tk_sequence`, or `CORBA::tk_array`.

```
CORBA::ULong member_count() const;
```

This method returns the member count of the type being represented by this `TypeCode` object. If the type being represented does not have members, a `BadKind` exception is raised. Types that have members include:

- `CORBA::tk_struct`
- `CORBA::tk_union`
- `CORBA::tk_enum`
- `CORBA::tk_except`

```
CORBA::Any_ptr member_label(CORBA::ULong index) const;
```

This method returns the label of the member with the specified index from a `TypeCode` object for a union. If this object's kind is not

CORBA::tk_union, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised.

Parameter	Description
index	The label of the union member whose type is to be returned. This index is zero-based.

```
const char *member_name(CORBA::ULong index) const;
```

This method returns the name of the member with the specified index from the type being represented by this object. If the type being represented does not have members, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised.

Types that have members include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_except

Parameter	Description
index	The zero-based index of the member whose name is to be returned.

```
CORBA::TypeCode_ptr member_type(CORBA::ULong index) const;
```

This method returns the type of the member with the specified index from the type being represented by this object. If the type being represented does not have members with types, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised. Types that have members include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_except

Parameter	Description
index	The zero-based index of the member whose name is to be returned.

```
const char *name() const;
```

This method returns the name of the type represented by this object. If the type does not have a name, a BadKind exception is raised. Types that have a name include:

- CORBA::tk_objref
- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_alias
- CORBA::tk_except

```
static CORBA::TypeCode_ptr _duplicate(
    CORBA::TypeCode_ptr obj);
```

This static method duplicates the specified TypeCode object.

Parameter	Description
obj	The object to be duplicated.

```
static CORBA::TypeCode_ptr _nil();
```

This static method returns a NULL TypeCode pointer that can be used for initialization purposes.

```
static void _release(CORBA::TypeCode_ptr obj);
```

This static method decrements the reference count to the specified object. When the reference count is zero, it also frees all memory that it is managing and then deletes the object.

Parameter	Description
obj	The object to be released.

```
CORBA::Boolean equivalent (CORBA_TypeCode_ptr tc)
    const;
```

The equivalent operation is used by the ORB when determining the type equivalence for values stored in an IDL.

```
CORBA_TypeCode_ptr get_compact_typecode() const;
```

The get_compact_code operation strips out all optional name & member name fields, but it leaves all alias typecodes intact.

```
virtual CORBA::Visibility
    member_visibility(CORBA::ULong index) const;
```

This method returns the Visibility of the valuetype member identified by index.

Note

The member_visibility operation can only be invoked on valuetype TypeCodes, not on valueboxes (or boxed values).

```
virtual CORBA::ValueModifier type_modifier() const;
```

The type_modifier operations can only be invoked on non-boxed valuetype TypeCodes. This method returns the ValueModifier that applies to the valuetype represented by the target TypeCode.

```
virtual CORBA::TypeCode_ptr concrete_base_type()
```

The concrete_base_type operations can only be invoked on non-boxed valuetype TypeCodes. If the value represented by the target TypeCode has a concrete base valuetype, this method returns a TypeCode for the concrete base, otherwise it returns a nil TypeCode reference.

Interface repository interfaces and classes (C++)

This section describes the classes and interfaces that you can use to access the interface repository. The interface repository maintains information on modules and the interfaces they contain as well as other types like operations, attributes, and constants.

AliasDef

```
class CORBA::AliasDef : public CORBA::TypedefDef
```

This class is derived from the `TypedefDef` class and represents an alias for a `typedef` that is stored in the interface repository. This class provides methods for setting and obtaining the `IDLType` of the original `typedef`.

For more information on the `TypedefDef` class, go to [“TypedefDef” on page 109](#) for more information. For more information on the `IDLType` class, go to [“IDLType” on page 96](#) for more information.

AliasDef methods

```
CORBA::IDLType original_type_def();
```

This method returns the `IDLType` of the original `typedef` for which this object is an alias.

```
void original_type_def(CORBA::IDLType_ptr val);
```

This method sets the `IDLType` of the original `typedef` for which this object is an alias.

Parameter	Description
<code>val</code>	The <code>IDLType</code> to set for this alias.

ArrayDef

```
class CORBA::ArrayDef : public CORBA::IDLType
```

This class is derived from the `IDLType` class and represents an array that is stored in the interface repository. It provides methods for setting and obtaining the type of the elements in the array as well as the length of the array.

ArrayDef methods

```
CORBA::TypeCode element_type();
```

This method returns the `TypeCode` of the array's elements.

```
CORBA::IDLType_ptr element_type_def() ;
```

This method returns the IDLType of the elements stored in this array.

```
void element_type_def(CORBA::IDLType_ptr  
    element_type_def) ;
```

This method sets the IDLType of the elements stored in the array.

Parameter	Description
<code>element_type_def</code>	The IDLType of the elements in the array.

```
CORBA::ULong length() ;
```

This method returns the number of elements in the array.

```
void length(CORBA::ULong length) ;
```

This method sets the number of elements in the array.

Parameter	Description
<code>length</code>	The number of elements in the array.

AttributeDef

```
class CORBA::AttributeDef : public CORBA::Contained,  
    public CORBA::Object
```

The class is used to represent an interface attribute that is stored in the interface repository. It provides methods for setting and obtaining the attribute's mode, `typedef`. A method is also provided for obtaining the attribute's type.

AttributeDef methods

```
CORBA::AttributeMode mode() ;
```

This method returns the mode of the attribute. The return value will be either `CORBA::AttributeMode ATTR_READONLY` for read only attributes or `CORBA::AttributeMode ATTR_NORMAL` for read-write ones. Go to ["AttributeMode" on page 83](#) for more information.

```
void mode(CORBA::AttributeMode _val) ;
```

This method sets the mode of the attribute.

Parameter	Description
<code>_val</code>	The mode to set.

```
CORBA::TypeCode_ptr type() ;
```

This method returns the TypeCode that represents the attribute's type.

```
CORBA::IDLType_ptr type_def() ;
```

This method returns this object's IDLType.

```
void type_def(CORBA::IDLType_ptr type_def);
```

This method sets the IDLType for this object.

Parameter	Description
<code>type_def</code>	The IDLType of this object.

AttributeDescription

```
struct CORBA::AttributeDescription
```

The AttributeDescription structure describes an attribute that is stored in the interface repository.

AttributeDescription members

```
CORBA::Identifier_var name
```

The name of the attribute.

```
CORBA::RepositoryId_var id
```

The repository id of the attribute.

```
CORBA::RepositoryId_var defined_in
```

The repository id of the interface in which this attribute is defined.

```
CORBA::String_var version
```

The attribute's version.

```
CORBA::TypeCode_var type
```

The attribute's IDL type.

```
CORBA::AttributeMode mode
```

The mode of this attribute.

AttributeMode

```
enum CORBA::AttributeMode
```

The enumeration defines the values used to represent the mode of an attribute; either read-only or normal (read-write).

AttributeMode values

Constant	Represents
<code>ATTR_NORMAL</code>	This is a read-write attribute.
<code>ATTR_READONLY</code>	This is a read-only attribute.

ConstantDef

```
class CORBA::ConstantDef : public CORBA::Contained
```

The class is used to represent a constant definition that is stored in the interface repository. This interface provides methods for setting and obtaining the constant's type, value, and typedef.

ConstantDef methods

```
CORBA::TypeCode_ptr type ();
```

This method returns the TypeCode representing the object's type.

```
CORBA::IDLType_ptr type_def ();
```

This method returns this object's IDLType.

```
void type_def(CORBA::IDLType_ptr type_def);
```

This method sets the IDLType of the constant.

Parameter	Description
<code>type_def</code>	The IDLType of this constant.

```
CORBA::Any *value ();
```

This method returns a pointer to an Any object representing this object's value.

```
void value(CORBA::Any& _val);
```

This method sets the value of this constant.

Parameter	Description
<code>_val</code>	An Any object that represents this object's value.

ConstantDescription

```
struct CORBA::ClassName
```

The ConstantDescription structure describes a constant that is stored in the interface repository.

ConstantDescription members

```
CORBA::Identifier_var name
```

The name of the constant.

```
CORBA::RepositoryId_var id
```

The repository id of the constant.

```
CORBA::RepositoryId_var defined_in
```

The name of the module or interface in which this constant is defined.

```
CORBA::String_var version
```

The constant's version.

```
CORBA::TypeCode_var type
```

The constant's IDL type.

```
CORBA::Any value
```

The value of this constant.

Contained

```
class CORBA::Contained : public CORBA::IObject, public
    CORBA::Object
```

The Contained class is used to derive all interface repository objects that are themselves contained within another interface repository object. This class provides methods for:

- Setting and retrieving the object's name and version.
- Determining the Container that contains this object.
- Obtaining the object's absolute name, containing repository, and description.
- Moving an object from one container to another.

Include file

Include the file **corba.h** when you use this class.

```
interface Contained: IObject {
    attribute RepositoryId id;
    attribute Identifier name;
    attribute String_var version;

    readonly attribute Container defined_in;
    readonly attribute ScopedName absolute_name;
    readonly attribute Repository containing_Repository;
    struct Description {
        DefinitionKind kind;
        any value;
    };
    Description describe();
    void move(
        in Container new_Container,
        in Identifier new_name,
        in String_var new_version
    );
};
```

Contained methods

```
CORBA::String_var absolute_name();
```

This method returns the absolute name, which is the name that uniquely identifies this object within its containing Repository. If the object's `defined_in` attribute (set when the object is created) references a Repository, then the absolute name is simply the object's name preceded by the string "::`name`".

```
CORBA::Repository_ptr containing_repository();
```

Returns a pointer to the repository that contains this object.

```
CORBA::Container_ptr defined_in();
```

Returns a pointer to the Container where this object is defined.

```
Description* describe();
```

Returns this object's Description. Go to ["Description" on page 92](#) for more information on the Description structure.

```
CORBA::String_var id();
```

Returns this object's repository identifier.

```
void id(const char *id);
```

Sets the repository identifier that uniquely identifies this object.

Parameter	Description
id	The repository identifier for this object.

```
CORBA::String_var name();
```

This method returns the name which uniquely identifies the object within the scope of its container.

```
void name(const char * val);
```

This method sets the name of the contained object.

Parameter	Description
name	The object's name.

```
CORBA::String_var version();>
```

This method returns the object's version. The version distinguishes this object from other objects that have the same name.

```
void version(CORBA::String_var& val);
```

This method sets this object's version.

Parameter	Description
val	The object's version.

```
void move(CORBA::Container_ptr new_container, const char *new_name, CORBA::String_var& new_version);
```

Moves this object from its current Container to the new_container.

Parameter	Description
new_container	The Container to which this object is being moved.
new_name	The new name for the object.
new_version	The new version specification for the object.

Container

```
class CORBA::Container : public CORBA::Container,  
    public CORBA::Object
```

The Container class is used to create a containment hierarchy in the interface repository. A Container object holds object definitions derived

from the Contained class. All object definitions derived from the Container class, with the exception of the Repository class, also inherit from the Contained class.

The Container provides methods to create types of IDL types defined in **orbtypes.h**, including InterfaceDef, ModuleDef and ConstantDef classes, but not the ValueMemberDef class. The defined_in attribute of each definition that is created is initialized to point to this object.

Include file

The corba.h file should be included when you use this class.

```
interface Container: IObject {
    Contained lookup(in ScopedName search_name);
    ContainedSeq contents(
        in DefinitionKind limit_type,
        in boolean exclude_inherited
    );
    ContainedSeq lookup_name(
        in Identifier search_name,
        in long levels_to_search,
        in CORBA::DefinitionKind limit_type,
        in boolean exclude_inherited
    );
    struct Description {
        Contained Contained_object;
        DefinitionKind kind;
        any value;
    };
    typedef sequence<Description> DescriptionSeq;
    DescriptionSeq describe_contents(
        in DefinitionKind limit_type,
        in boolean exclude_inherited,
        in long max_returned_objs
    );
};
```

Container methods

```
CORBA::AbstractInterfaceDef_ptr create_abstract_interface(
    const char* _arg_id,
    const char* _arg_name,
    const char* _arg_name,
    const char* _arg_version,
    const CORBA_AbstractInterfaceDefSeq& _arg_base_interfaces)
```

This method creates an AbstractInterfaceDef object with the specified attributes in the Container and returns a pointer to the newly created object.

Parameter	Description
id	The interface id.
name	The interface name.
version	The interface version.
base_interfaces	A list of all abstract interfaces from which this interface inherits.

```
CORBA::ContainedSeq * contents(CORBA::DefinitionKind
    limit_type, CORBA::Boolean exclude_inherited);
```

This method returns the list of definitions of contained objects that are either directly contained or inherited into the container. You can use this method to navigate through the hierarchy of object definitions in the Repository. This method returns all object definitions contained by modules in the Repository, followed by all object definitions contained within each of those modules.

Parameter	Description
<code>limit_type</code>	The interface object types to be returned. If you specify <code>dk_all</code> , objects of all types are returned.
<code>exclude_inherited</code>	If set to TRUE, inherited objects are not returned.

```
CORBA::AliasDef_ptr create_alias(const char * id,
    const char *name,
    const CORBA::String_var& version,
    CORBA::IDLType_ptr original_type);
```

This method creates an AliasDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
<code>id</code>	The alias's id.
<code>name</code>	The alias's name.
<code>version</code>	The alias's version.
<code>original_type</code>	The type of the object for which this object is an alias.

```
CORBA::ConstantDef_ptr create_constant(const char * id,
    const char *name,
    const CORBA::String_var& version,
    CORBA::IDLType_ptr type,
    const CORBA::Any& value);
```

This method creates a ConstantDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
<code>id</code>	The constant's id.
<code>name</code>	The constant's name.
<code>version</code>	The constant's version.
<code>type</code>	The type of the value specified below.
<code>value</code>	The constant's value.

```
CORBA::EnumDef_ptr create_enum(const char * id,
    const char *name, const CORBA::String_var& version,
    const CORBA::EnumMemberSeq& members);
```

This method creates an EnumDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
<code>id</code>	The enumeration's id.
<code>name</code>	The enumeration's name.
<code>version</code>	The enumeration's version.
<code>members</code>	A list of the enumeration's fields.


```

CORBA::ExceptionDef_ptr create_exception(const char *
    id,
    const char *name,
    const CORBA::String_var& version,
    const CORBA::StructMemberSeq& members);

```

This method creates an ExceptionDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The exception's id.
name	The exception's name.
version	The exception's version.
members	The sequence for the structure's fields, if any.

```

CORBA::InterfaceDef_ptr create_interface(const char * id,
    const char *name,
    const CORBA::String_var& version,
    const CORBA::InterfaceDefSeq& base_interfaces);

```

This method creates an InterfaceDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The interface's id.
name	The interface's name.
version	The interface's version.
base_interfaces	A list of all interfaces that this interface inherits from.

```

CORBA::ModuleDef_ptr create_module(const char * id,
    const char *name,
    const CORBA::String_var& version);

```

This method creates a ModuleDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The module's id.
name	The module's name.
version	The module's version.

```

CORBA::StructDef_ptr create_struct(const char * id,
    const char *name,
    const CORBA::String_var& version,
    const CORBA::StructMemberSeq& members);

```

This method creates a StructureDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The structure's id.
name	The structure's name.
version	The structure's version.
members	The sequence for the structure's fields.

```

CORBA::UnionDef_ptr create_union(const char * id,
    const char *name,
    const CORBA::String_var& version,
    CORBA::IDLType_ptr discriminator_type,
    const CORBA::UnionMemberSeq& members);

```

This method creates a UnionDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The Union's id.
name	The Union's name.
version	The Union's version.
discriminator_type	The type of the Union's discriminant value.
members	The sequence of each of the Union's fields.

```

CORBA::DescriptionSeq *
describe_contents(CORBA::DefinitionKind limit_type,
    CORBA::Boolean exclude_inherited,
    CORBA::Long max_returned_objs);

```

This method returns a description for all definitions directly contained by or inherited into this container.

Parameter	Description
limit_type	The interface object types whose descriptions are to be returned. Specifying dk_all will return the descriptions for objects of all types.
exclude_inherited	If set to true, descriptions for inherited objects are not returned.
max_returned_objs	The maximum number of descriptions to be returned. If you set this parameter to -1, all objects are returned.

```

CORBA::Contained_ptr lookup(const char *search_name);

```

This method locates a definition relative to this container, given a scoped name. An absolute scoped name, one beginning with ":", may be specified to locate a definition within the enclosing repository. If no object is found, a NULL value is returned.

Parameter	Description
search_name	The object's interface name.

```

CORBA::ContainedSeq * lookup_name(const char
    *search_name,
    CORBA::Long levels_to_search, CORBA::DefinitionKind
    limit_type,
    CORBA::Boolean exclude_inherited);

```

This method locates an object by name within a particular object. The search can be constrained by the number of levels in the hierarchy to be

searched, the object type, and whether inherited objects should be returned.

Parameter	Description
search_name	The contained object's name.
levels_to_search	The number of levels in the hierarchy to search. If you set this parameter to a value of -1, all levels are searched. If you set this parameter to 1, only this object is searched.
limit_type	The interface object types to be returned. Specifying dk_all will return objects of all types.
exclude_inherited	If set to true, inherited objects are not returned.

```
CORBA::ValueDef_ptr create_value(const char * id,
    const char *name,
    const char version,
    CORBA::boolean is_custom,
    CORBA::boolean is_abstract,
    const CORBA::ValueDef_ptr _base_value,
    CORBA::boolean is_truncatable,
    const CORBA::ValueDefSeq& abstract_base_values,
    const CORBA::InterfaceDefSeq& supported_interfaces,
    const CORBA::InitializerSeq& initializers)
```

This method creates a ValueDef object with the specified attributes in this Container and returns a reference to the newly created object.

Parameter	Description
id	The structure's repository id.
name	The structure's name.
version	The structure's version.
is_custom	If set to true, creates a custom valuetype.
is_abstract	If set to true, creates an abstract valuetype.
base_values	The list of supported base values.
is_truncatable	If set to true, creates a truncatable valuetype.
abstract_base_values	The list of supported abstract base values.
supported_interfaces	The list of supported interfaces.
initializer	The list of initializers this value type supports

```
CORBA::ValueBoxDef_ptr create_value_box(const char* id,
    const char* name, const char* version,
    CORBA::IDLType_ptr original_type)
```

This method creates a ValueBoxDef object in this Container with the specified attributes and returns a reference to the newly created object.

Parameter	Description
id	The structure's repository id.
name	The structure's name.
version	The structure's version.
original_type	The IDL type of the original object for which this is an alias.

DefinitionKind

enum **CORBA::DefinitionKind**

The constants in the `DefinitionKind` enumeration define the possible types of interface repository objects.

DefinitionKind values

Constant	Represents
<code>dk_none</code>	Exclude all types (used in repository lookup methods)
<code>dk_all</code>	All possible types (used in repository lookup methods)
<code>dk_Alias</code>	Alias
<code>dk_Array</code>	Array
<code>dk_Attribute</code>	Alias
<code>dk_Constant</code>	Constant
<code>dk_Enum</code>	Enum
<code>dk_Exception</code>	Exception
<code>dk_Fixed</code>	Fixed
<code>dk_Interface</code>	Interface
<code>dk_Module</code>	Module
<code>dk_Native</code>	Native
<code>dk_Operation</code>	Interface Operation
<code>dk_Primitive</code>	Primitive type (such as int or long)
<code>dk_Repository</code>	Repository
<code>dk_Sequence</code>	Sequence
<code>dk_String</code>	String
<code>dk_Struct</code>	Struct
<code>dk_Typedef</code>	Typedef
<code>dk_Union</code>	Union
<code>dk_Value</code>	ValueType
<code>dk_ValueBox</code>	ValueBox
<code>dk_ValueMember</code>	ValueMember
<code>dk_Wstring</code>	Unicode string

Description

struct **CORBA::Container::Description**

This structure provides a generic description for items in the interface repository that are derived from the `Contained` class.

Description members

`CORBA::Contained_var` **contained_object**

The object contained in this struct.

`CORBA::DefinitionKind` **kind**

The object's kind.

CORBA::Any **value**

The object's value.

EnumDef

```
class CORBA::EnumDef : public CORBA::TypedDef, public  
CORBA::Object
```

The class is used to describe an enumeration stored in the interface repository. This interface provides methods for setting and retrieving the enumeration's list of members.

EnumDef methods

```
CORBA::EnumMemberSeq *members ();
```

This method returns the enumeration's list of members.

```
void members (CORBA::EnumMemberSeq members);
```

This method sets the enumeration's list of members.

Parameter	Description
members	The list of members.

ExceptionDef

```
class ExceptionDef : public CORBA::Contained
```

The class is used to describe an exception that is stored in the interface repository. This class provides methods for setting and retrieving the exception's list of members as well as a method for retrieving the exception's TypeCode.

ExceptionDef methods

```
CORBA::StructMemberSeq *members ();
```

This method returns this exception's list of members.

```
void members (CORBA::StructMemberSeq& members);
```

This method sets the exception's list of members.

Parameter	Description
members	The list of members.

```
CORBA::TypeCode_ptr type ();
```

This method returns the TypeCode that represents this exception's type.

ExceptionDescription

```
struct CORBA::ExceptionDescription
```

This structure is used to describe an exception that is stored in the interface repository.

ExceptionDescription members

```
CORBA::String_var defined_in
```

The repository Id of the module or interface in which this exception is defined.

```
CORBA::String_var id
```

The repository id of the exception.

```
CORBA::String_var name
```

The name of the exception.

```
CORBA::TypeCode_var type
```

The exception's IDL type.

```
CORBA::String_var version
```

The exception's version.

FixedDef

```
CORBA::FixedDef public CORBA::IDLType, public  
CORBA::Object
```

This interface is used to describe a fixed definition that is stored in the Interface Repository.

Methods

```
CORBA::UShort digits();
```

This method sets the number of digits for the fixed type.

```
void digits(CORBA::UShort _digits);
```

This method sets the attribute for fixed type.

```
CORBA::Short scale();
```

This method sets the scale for the fixed type.

```
void scale(CORBA::Short _scale);
```

This method sets the attribute for the fixed type.

FullInterfaceDescription

```
struct CORBA::FullInterfaceDescription
```

The FullInterfaceDescription structure describes an interface that is stored in the interface repository.

FullInterfaceDescription members

`CORBA::String_var` **Name**

The name of the interface.

`CORBA::String_var` **id**

The repository id of the interface.

`CORBA::String_var` **defined_in**

The name of the module or interface in which this interface is defined.

`CORBA::String_var` **version**

The interface's version.

`CORBA::OpDescriptionSeq` **operations**

The list of operations supported by this interface.

`CORBA::AttrDescriptionSeq` **attributes**

The list of attributes contained in this interface.

`CORBA::RepositoryIdSeq` **base_interfaces**

The interfaces from which this interface inherits.

`CORBA::RepositoryIdSeq` **derived_interfaces**

The interfaces derived from this interface.

`CORBA::TypeCode_var` **type**

This interface's TypeCode.

`CORBA::Boolean` **is_abstract**

Indicates whether or not this interface is abstract.

FullValueDescription

```
struct CORBA::FullValueDescription
```

This structure is used to represent a full value definition that is stored in the Interface Repository.

Variables

`CORBA::String_var` **name**

The name of the valuetype.

`CORBA::String_var` **id**

The repository id of the valuetype.

`CORBA::Boolean` **is_abstract**

If this variable is true, specifies an abstract valuetype.

`CORBA::Boolean` **is_custom**

If this variable is true, specifies custom marshalling for the valuetype.

`CORBA::String_var` **defined_in**

The repository Id of the module in which this valuetype is defined.

`CORBA::String_var` **version**

The valuetype's version.

`CORBA::OpDescriptionSeq` **operations**

The list of operations offered by the valuetype.

`CORBA::AttrDescriptionSeq` **attributes**

The valuetype's list of valuetype's member attributes.

`CORBA::ValueMemberSeq` **members**

The array of value definitions.

`CORBA::InitializerSeq` **initializers**

The array of initializers.

`CORBA::RepositoryIdSeq` **supported_interfaces;**

The list of supported interfaces.

`CORBA::RepositoryIdSeq` **abstract_base_values;**

The list of abstract value types from which this valuetype inherits.

`CORBA::Boolean` **is_truncatable;**

If this variable is set to `true`, the value can be truncated to its base valuetype safely.

`CORBA::String_var` **base_values;**

The description of the value type from which this valuetype inherits.

`CORBA::TypeCode_var` **type**

The valuetype's IDL type code.

IDLType

```
class CORBA::IDLType : public CORBA::IObject, public  
    CORBA::Object
```

The `IDLType` class provides an abstract interface that is inherited by all interface repository definitions that represent IDL types. This class provides a method for returning an object's `Typecode`, which identifies the object's type. The `IDLType` is unique; the `Typecode` is not.

Include file

You should include the file `corba.h` when using this class.


```
interface IDLType:IObject {
    readonly attribute TypeCode type;
};
```

IDLType methods

```
CORBA::Typecode_ptr type();
```

This method returns the typecode of the current IObject.

InterfaceDef

```
class CORBA::InterfaceDef : public CORBA::Container,
    public CORBA::Contained, public CORBA::IDLType
```

The InterfaceDef class is used to define an ORB object's interface that is stored in the interface repository.

For more information, see [“Container” on page 86](#), [“Contained” on page 85](#), and [“IDLType” on page 96](#).

Include file

You should include the file **corba.h** when you use this class.

```
interface InterfaceDef: Container, Contained, IDLType {
    typedef sequence<RepositoryId> RepositoryIdSeq;
    typedef sequence<OperationDescription> OpDescriptionSeq;
    typedef sequence<AttributeDescription> AttrDescriptionSeq;
    attribute InterfaceDefSeq base_interfaces;
    attribute boolean is_abstract;
    readonly attribute InterfaceDefSeq
        derived_interfaces
    boolean is_a(in RepositoryId interface_id);
    struct FullInterfaceDescription {
    Identifier name;
    RepositoryId id;
    RepositoryId defined_in;
    String_var version;
    OpDescriptionSeq operations;
    AttrDescriptionSeq attributes;
    RepositoryIdSeq base_interfaces;
        RepositoryIdSeq derived_interfaces;
    TypeCode type;
        boolean is_abstract;
    };
    FullInterfaceDescription describe_interface();
    AttributeDef create_attribute(
        in RepositoryId id,
        in Identifier name,
        in String_var version,
        in IDLType type,
        in CORBA::AttributeMode mode
    );
    OperationDef create_operation(
        in RepositoryId id,
        in Identifier name,
        in String_var version,
```

```

        in IDLType result,
        in OperationMode mode,
        in ParDescriptionSeq params,
        in ExceptionDefSeq exceptions,
        in ContextIdSeq contexts
    );
    struct InterfaceDescription {
        Identifier name;
        RepositoryId id;
        RepositoryId defined_in;
        String_var version;
        RepositoryIdSeq base_interfaces;
        boolean is_abstract;
    };
};

```

InterfaceDef methods

```
CORBA::InterfaceDefSeq *base_interfaces();
```

This method returns a list of interfaces from which this class inherits.

```
void base_interfaces(const CORBA::InterfaceDefSeq& val);
```

This method sets the list of the interfaces from which this class inherits.

Parameter	Description
val	The list of interfaces from which this interface inherits.

```
CORBA::AttributeDef_ptr create_attribute(const char *
id, const char * name, const CORBA::String_var&
version, CORBA::IDLType_ptr type,
CORBA::AttributeMode mode);
```

This method returns a pointer to a newly created AttributeDef that is contained in this object. The id, name, version, type, and mode are set to the values specified.

Parameter	Description
id	The interface id to use.
name	The interface name to use.
version	The interface version to use.
mode	The interface mode. Go to “AttributeMode” on page 83 for a list of possible values.

```
CORBA::OperationDef_ptr create_operation(const char
*id, const char *name, CORBA::String_var& version,
CORBA::IDLType_ptr result,
CORBA::OperationMode mode,
const CORBA::ParDescriptionSeq& params,
```

```
const CORBA::ExceptionDefSeq& exceptions,
const CORBA::ContextIdSeq& contexts);
```

This method creates a new `OperationDef` that is contained by this object using the specified parameters. The `defined_in` attribute of the newly created `OperationDef` is set to identify this `InterfaceDef`.

Parameter	Description
<code>id</code>	The interface id for this operation.
<code>name</code>	The name of this operation.
<code>version</code>	The operation's version.
<code>result</code>	The IDL type returned by the operation.
<code>mode</code>	The mode of this operation--oneway or normal.
<code>params</code>	The list of parameters to pass to this operation.
<code>exceptions</code>	The list of exceptions raised by this operation.
<code>contexts</code>	Context lists are names of values expected in context and passed along with the request.

```
CORBA::InterfaceDef::FullInterfaceDescription
*describe_interface();
```

This method returns the `FullInterfaceDescription` which describes this object's interface.

```
CORBA::Boolean is_a(const char * interface_id);
```

This method returns `true` if this interface is identical to or inherits from the specified interface directly or indirectly.

Parameter	Description
<code>interface_id</code>	The id of the interface to be checked against this interface.

InterfaceDescription

```
struct CORBA:: InterfaceDescription
```

This structure describes an object that is stored in the interface repository.

InterfaceDescription members

```
CORBA::String_var name
```

The name of the interface.

```
CORBA::String_var id
```

The interface's repository identifier.

```
CORBA::String_var defined_in
```

The name of the repository Id in which the interface is defined.

```
CORBA::String_var version
```

The interface's version.

```
CORBA::RepositoryIdSeq base_interfaces
```

A list of base interfaces for this interface.

```
CORBA::Boolean is_abstract
```

Indicates whether or not this interface is abstract.

IObject

```
class IObject : CORBA::Object
```

The IObject class offers the most generic interface for interface repository objects. The Container class, IDLType, Contained, and others are derived from this class.

Include file

You should include the file **corba.h** when you use this class.

```
interface IObject {  
    readonly attribute DefinitionKind def_kind;  
    void destroy();  
};
```

IObject methods

```
CORBA::DefinitionKind def_kind();
```

This method returns the type of this interface repository object. Go to [“DefinitionKind” on page 92](#) for a list of possible types.

```
void destroy();
```

This method deletes this object from the interface repository. If this object is a Container, this method also deletes all of its contents. If the object is currently contained by another object, it is removed. The destroy method returns the Exception(CORBA::BAD_PARAM) when invoked on a PrimitiveDef or Repository object. The Repository class is described in [“Repository” on page 106](#).

ModuleDef

```
class ModuleDef : CORBA::Container, CORBA::Contained
```

The class is used to represent an IDL module in the interface repository.

ModuleDescription

```
struct ModuleDescription
```

The ModuleDescription structure describes a module that is stored in the interface repository.

ModuleDescription members

```
CORBA::String_var name
```

The name of the module.

```
CORBA::String_var id
```

The repository id of the module.

```
CORBA::String_var defined_in
```

The name of the repository Id in which this module is defined.

```
CORBA::String_var version
```

The module's version.

NativeDef

```
class CORBA::NativeDef
```

This interface is used to represent a native definition that is stored in the Interface Repository.

OperationDef

```
class CORBA::OperationDef : public virtual  
CORBA::Contained, public CORBA::Object
```

The OperationDef class contains information about an interface operation that is stored in the interface repository. This class is derived from the Contained class, which is described in [“Contained” on page 85](#). The inherited describe method returns a OperationDescription structure that provides complete information on the operation.

Include file

You should include the file **corba.h** when you use this class.

```
interface OperationDef: Contained {  
    typedef sequence<ParameterDescription>  
ParDescriptionSeq;  
    typedef Identifier ContextIdentifier;  
    typedef sequence<ContextIdentifier> ContextIdSeq;  
    typedef sequence<ExceptionDef> ExceptionDefSeq;  
    typedef sequence<ExceptionDescription>  
ExcDescriptionSeq;  
    readonly attribute TypeCode result;  
    attribute IDLType result_def;  
    attribute ParDescriptionSeq params;  
    attribute CORBA::OperationMode mode;  
    attribute ContextIdSeq contexts;  
    attribute ExceptionDefSeq exceptions;  
  
    readonly attribute OperationKind bind;  
};  
struct OperationDescription {  
    Identifier name;  
    RepositoryId id;  
    RepositoryId defined_in;  
    String_var version;  
    TypeCode result;  
    OperationMode mode;  
    ContextIdSeq contexts;  
    ParDescriptionSeq parameters;  
    ExcDescriptionSeq exceptions;  
};
```

OperationDef methods

```
CORBA::ContextIdSeq * contexts();
```

This method returns the list of context identifiers that apply to the operation.

```
void context(const CORBA::ContextIdSeq& val);
```

This method sets the list of context identifiers that apply to this operation.

Parameter	Description
val	The list of context identifiers.

```
CORBA::ExceptionDefSeq * exceptions();
```

This method returns the list of the exception types that can be raised by this operation.

```
void exceptions(const CORBA::ExceptionDefSeq& val);
```

This method sets the list of exception types that may be raised by this operation.

Parameter	Description
val	The list of exceptions that this operation may raise.

```
CORBA::OperationMode mode();
```

This method returns the mode of the operation represented by this OperationDef. The mode may be normal or oneway. Operations that have a normal mode are synchronous and return a value to the client application. Oneway operations do not block and no response is sent from the object implementation to the client.

```
void mode(CORBA::OperationMode val);
```

This method sets the mode of the operation.

Parameter	Description
val	The desired mode of this operation, either OP_ONeway or OP_NORMAL. Go to "OperationMode" on page 104 for more information.

```
CORBA::ParDescriptionSeq * params();
```

This method returns a pointer to a list of ParameterDescription structures that describe the parameters to this OperationDef.

```
void params(const CORBA::ParDescriptionSeq& val);
```

This method sets the list of the ParameterDescription structures for this OperationDef. The order of the structures is significant and should correspond to the order defined in the IDL definition for the operation.

Parameter	Description
val	The list of ParameterDescription structures.

```
CORBA::TypeCode_ptr result ();
```

This method returns a pointer to a TypeCode representing the type of the value returned by this Operation. The TypeCode is a read-only attribute.

```
CORBA::IDLType_ptr result_def ();
```

This method returns a pointer to the definition of the IDL type returned by this OperationDef.

```
void result_def(CORBA::IDLType_ptr val);
```

This method sets the definition of the type returned by this OperationDef.

Parameter	Description
val	A pointer to the type definition to use.

OperationDescription

```
struct CORBA::OperationDescription
```

The OperationDescription structure describes an operation that is stored in the interface repository.

OperationDescription members

```
CORBA::String_var name
```

The name of the operation.

```
CORBA::String_var id
```

The repository id of the operation.

```
CORBA::String_var defined_in
```

The repository id of the interface or valuetype in which this operation is defined.

```
CORBA::String_var version
```

The operation's version.

```
CORBA::TypeCode_var result
```

The operation's result.

```
CORBA::OperationMode mode
```

The operation's mode.

```
CORBA::ContextIdSeq contexts
```

The operation's associated context list.

```
CORBA::ParameterDescriptionSeq parameters
```

The operation's parameters.

```
CORBA::ExceptionDescriptionSeq exceptions
```

The exceptions that this operation may raise.

OperationMode

enum CORBA:**OperationMode**

The enumeration defines the values used to represent the mode of an operation; either oneway or normal. Oneway operations are those for which the client application does not expect a response. Normal requests involve a response being sent to the client by the object implementation that contains the results of the request.

OperationMode values

Constant	Represents
OP_NORMAL	A normal operation request.
OP_ONeway	A oneway operation request.

ParameterDescription

struct CORBA::**ParameterDescription**

The ParameterDescription structure describes a parameter for an operation that is stored in the interface repository.

ParameterDescription members

CORBA::String_var **name**

The name of the parameter.

CORBA::TypeCode_var **type**

The parameter's typecode.

CORBA::IDLType_var **type_def**

The parameter's IDL type.

CORBA::ParameterMode **mode**

The parameter's mode.

ParameterMode

enum CORBA::**ParameterMode**

The values that represent the possible modes of parameters to operations.

ParameterMode values

Constant	Represents
PARAM_IN	Parameter is for input from the client to the server.
PARAM_OUT	Parameter is for output of results from the server to the client.
PARAM_INOUT	Parameter may be used for both input from the client and output from the server.

PrimitiveDef

```
class PrimitiveDef : public CORBA::IDLType, public  
    CORBA::Object
```

The class is used to describe a primitive (such as an int or a long) that is stored in the interface repository. It provides a method for retrieving what kind of primitive it is.

PrimitiveDef methods

```
CORBA::PrimitiveKind kind();
```

This method returns the kind of primitive represented by this object.

PrimitiveKind

```
enum CORBA::PrimitiveKind
```

The PrimitiveKind enumeration contains the constants that define the primitive types of objects that may be stored in the interface repository.

PrimitiveKind values

Constant	Represents
pk_null	Null value
pk_void	Void
pk_short	Short
pk_long	Long
pk_ushort	Unsigned short
pk_ulong	Unsigned long
pk_float	Float
pk_double	Double
pk_boolean	Boolean
pk_char	Character
pk_octet	Octet
pk_any	Any
pk_TypeCode	TypeCode
pk_Principal	Principal
pk_string	String
pk_objref	Object reference
pk_longlong	Long long
pk_ulonglong	Unsigned long long
pk_longdouble	Long double
pk_wchar	Unicode character
pk_wstring	Unicode string

Repository

```
class Repository : public CORBA::Container, public  
    CORBA::Object
```

The `Repository` class provides access to the interface repository and is derived from the `Container` class. Go to [“Contained” on page 85](#) for more information.

Include file

You should include the file `corba.h` when using this class.

```
interface Repository: Container {  
    Contained lookup_id(in RepositoryId search_id);  
    PrimitiveDef get_primitive(in CORBA::PrimitiveKind  
kind);  
    StringDef create_string(in unsigned long bound);  
    WStringDef create_wstring(in unsigned long bound)  
    SequenceDef create_sequence(  
        in unsigned long bound,  
        in IDLType element_type  
    );  
    ArrayDef create_array(  
        in unsigned long length,  
        n IDLType element_type  
    );  
    FixedDef create_fixed(  
        in unsigned short digits,  
        in short scale  
    );  
};  
;
```

Repository methods

```
CORBA::ArrayDef_ptr create_array(CORBA::ULong length,  
    CORBA::IDLType_ptr element_type);
```

This method creates a new `ArrayDef` and returns a pointer to it.

Parameter	Description
<code>length</code>	The maximum number of elements in the array. This value must be greater than zero.
<code>element_type</code>	The <code>IDLType</code> of the elements in the array.

```
CORBA::SequenceDef_ptr create_sequence  
    (CORBA::ULong bound,  
    CORBA::IDLType_ptr element_type);
```

This method creates a new `SequenceDef` object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum number of items in the sequence. This value must be greater than zero.
<code>element_type</code>	A pointer to the <code>IDLType</code> of the items in the sequence.

```
CORBA::StringDef_ptr create_string(CORBA::Ulong bound);
```

This method creates a new `StringDef` object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum length of the string. This value must be greater than zero.

```
CORBA::WstringDef_ptr create_wstring(CORBA::Ulong bound);
```

This method creates a new `WstringDef` object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum length of the string. This value must be greater than zero.

```
CORBA::PrimitiveDef_ptr get_primitive(CORBA::PrimitiveKind kind);
```

This method returns a reference to a `PrimitiveKind`.

Parameter	Description
<code>kind</code>	The reference to be returned.

```
CORBA::Contained_ptr lookup_id(const char * search_id);
```

This method searches for an object in the interface repository that matches the specified search id. If no match is found, a NULL value is returned.

Parameter	Description
<code>search_id</code>	The identifier to use for the search.

```
CORBA::FixedDef_ptr create_fixed(CORBA::UShort digits,  
CORBA::Short scale)
```

This method sets the number of digits and the scale for the fixed type.

Parameter	Description
<code>Ushort digits</code>	The number of digits for the fixed type.
<code>short scale</code>	The scale of the fixed type.

SequenceDef

```
class SequenceDef : public CORBA::IDLType, public  
CORBA::Object
```

The class is used to represent a sequence that is stored in the interface repository. This interface provides methods for setting and retrieving the sequence's bound and element type.

SequenceDef methods

```
CORBA::Ulong bound()
```

This method returns the bounds of the sequence.

```
void bound(CORBA::ULong bound)
```

This method sets the bound of the sequence.

Parameter	Description
members	The list of members.

```
CORBA::TypeCode_ptr element_type();
```

This method returns the TypeCode of the elements in this sequence.

```
CORBA::IDLType_ptr element_type_def();
```

This method returns the IDL type of the elements in this sequence.

```
void element_type_def(CORBA::IDLType_ptr  
    element_type_def);
```

This method sets the IDL type of the elements in this sequence.

Parameter	Description
element_type_def	The IDL type to set elements to.

StringDef

```
class StringDef : public CORBA::IDLType, public  
    CORBA::Object
```

The class is used to describe Strings stored in the interface repository. This interface provides methods for setting and retrieving the bounds of the strings.

StringDef methods

```
CORBA::ULong bound();
```

This method returns the bounds of the String.

```
void bound(CORBA::ULong bound);
```

This method sets the bounds of the String.

Parameter	Description
bound	The list of members.

StructDef

```
class StructDef : public CORBA::TypedefDef, public  
    CORBA::Container, public CORBA::Object
```

The class is used to represent a structure that is stored in the interface repository.

StructDef methods

```
CORBA::StructMemberSeq *members ();
```

This method returns the structure's list of members.

```
void members (CORBA::StructMemberSeq& members);
```

This method sets the structure's list of members.

Parameter	Description
members	The list of members.

StructMember

```
struct CORBA::StructMember
```

This interface is used to define the member for the struct. It uses the name and type variables in the definition.

StructMember methods

```
CORBA::String_var name
```

The name of the type.

```
CORBA::TypeCode_var type
```

The type's IDL type.

```
CORBA::IDLType_var type_def
```

The IDL type's IDL type definition.

TypedefDef

```
class TypedefDef : public CORBA::Contained, public  
CORBA::IDLType, public CORBA::Object
```

This abstract base class represents a user-defined structure that is stored in the interface repository. The following interfaces all inherit from this class:

- [“AliasDef” on page 81](#).
- [“ExceptionDef” on page 93](#).
- [“StructDef” on page 108](#).
- [“UnionDef” on page 110](#).
- [“WstringDef” on page 114](#).

TypeDescription

```
structure TypeDescription
```

The TypeDescription structure contains the information that describes a type for an operation stored in the interface repository.

TypeDescription members

`CORBA::String_var` **name**

The name of the type.

`CORBA::String_var` **id**

The repository id of the type.

`CORBA::String_var` **defined_in**

The name of the module or interface in which this type is defined.

`CORBA::String_var` **version**

The type's version.

`CORBA::TypeCode_var` **type**

The type's IDL type.

UnionDef

```
class UnionDef : public CORBA::TypedefDef, public  
    CORBA::Container, public CORBA::Object
```

This class is used to represent a Union that is stored in the interface repository. This class provides methods for setting and retrieving the union's list of members and discriminator type.

UnionDef methods

```
CORBA::TypeCode_ptr discriminator_type() ;
```

This method returns the TypeCode of the discriminator of the Union.

```
CORBA::IDLType_ptr discriminator_type_def() ;
```

This method returns the IDL type of the Union's discriminator.

```
void discriminator_type_def(CORBA::IDLType_ptr  
    discriminator_type_def) ;
```

This method sets the IDL type of the Union's discriminator.

Parameter	Description
<code>discriminator_type_def</code>	The list of members.

```
CORBA::UnionMemberSeq *members() ;
```

This method returns the Union's list of members.

```
void members(CORBA::UnionMemberSeq& members) ;
```

This method sets the Union's list of members.

Parameter	Description
<code>members</code>	The list of members.

UnionMember

```
struct CORBA::UnionMember
```

The `UnionMember` struct contains information that describes a `Union` that is stored in the interface repository.

UnionMember members

```
CORBA::String_var name
```

The name of the `Union`.

```
CORBA::Any label
```

The label of the `Union`.

```
CORBA::TypeCode_var type
```

The `Union`'s typecode.

```
CORBA::IDLType_var type_def
```

The `Union`'s IDL type.

ValueBoxDef

```
class ValueBoxDef public CORBA::Contained, public  
CORBA::IDLType, public CORBA::Object
```

This interface is used as a simple valuetype that contains a single public member of any IDL type. `ValueBoxDef` is a simplified version of `ValueType`:

```
public valuetype <IDLType> value;
```

This declaration is almost equal to `valuetype boxed type <IDLType>` but `ValueBoxDef` is not the same as simple `ValueTypeDef`.

Methods

```
CORBA::IDLType_ptr original_type_def();
```

This method identifies the type being boxed.

```
void original_type_def(CORBA::IDLType_ptr  
original_type_def);
```

This method sets the type being boxed.

ValueDef

```
class CORBA::ValueDef public CORBA::Container, public  
CORBA::Contained, public CORBA::IDLType, public  
CORBA::Object
```

This interface describes the IDL value type called a `construct`. This interface is very close to a class type. It represent a value definition that is stored in the Interface Repository.

Methods

`CORBA::InterfaceDefSeq supported_interfaces();`

This method lists the interfaces which this value type supports.

`void supported_interfaces(const CORBA::interfaceDefSeq&
supported_interfaces);`

This method sets the supported interfaces.

`CORBA::InitializerSeq& initializers();`

This method returns the list of initializers.

`void initializers(const CORBA::InitializerSeq&
initializers);`

This method sets the initializers.

`CORBA.ValueDef_ptr base_value();`

This method describes the value types from which this value inherits.

`void base_value(CORBA::ValueDef_ptr base_value);`

This method sets the value types

`CORBA.ValueDefSeq& abstract_base_values();`

This method returns the list of the abstract value types from which this value inherits.

`void abstract_base_values(const CORBA::ValueDef [Seq&
abstract_base_values);`

This method defines the abstract value type's base value.

`CORBA::Boolean is_abstract();`

This method returns true if the value is an abstract value type.

`void is_abstract(CORBA::Boolean is_abstract);`

This method sets the valuetype to be an abstract value type.

`CORBA::Boolean is_custom();`

This method returns true if the value uses custom marshalling.

`void is_custom(CORBA::Boolean is_custom);`

This method sets the custom marshalling for the value.

`CORBA::Boolean is_truncatable();`

This method returns true if the value can be truncated from its base value safely.

`void is_truncatable(CORBA::Boolean is_truncatable);`

This method sets the truncated attribute for this value.


```
CORBA::Boolean is_a(const char* value_id);
```

This method returns true if the value on which it is invoked either is identical to or inherits, directly or indirectly from the interface or value defined by the `value_id` parameter. Otherwise it returns false.

```
CORBA::ValueDef _ptr FullValueDescription*  
describe_value();
```

This method returns a `FullValueDescription` describing the value including its operations and attributes.

```
CORBA::ValueMemberDef_ptr create_value_member(const  
Char* id, const Char* name, const Char* version,  
CORBA::IDLType_ptr type_def, CORBA::short access);
```

This method returns a new `ValueMemberDef` contained in the `ValueDef` on which it is invoked.

Parameter	Description
<code>id</code>	The repository id for this type.
<code>name</code>	The name of this type.
<code>version</code>	The object's version.
<code>type_def</code>	The value's IDL type.
<code>short access</code>	The access value.

```
CORBA::AttributeDef_ptr create_attribute(const Char*  
id, const Char* name, const Char* version,  
CORBA::IDLType_ptr type, CORBA::AttributeMode mode);
```

This method creates a new attribute definition for this valuetype and returns a new `AttributeDef` for it

Parameter	Description
<code>id</code>	The repository id for this type.
<code>name</code>	The name of this type.
<code>version</code>	The object's version.
<code>type</code>	The type's IDL type.
<code>mode</code>	The object's mode.

```
CORBA::OperationDef_ptr create_operation(const Char*  
id, const Char* name, const Char* version,  
CORBA::IDLType_ptr result, CORBA::OperationMode mode,  
const CORBA::ParDescriptionSeq& params, const  
CORBA::ExceptionDefSeq& exceptions, const  
CORBA::ContextIDSeq& contexts);
```

This method creates a new `Operation` for this valuetype and returns an `OperationDef` for it.

Parameter	Description
<code>id</code>	The repository id for this type.
<code>name</code>	The name of this type.
<code>version</code>	The object's version.
<code>result</code>	The IDL type of the operation.
<code>mode</code>	The object's mode.
<code>params</code>	The list of the operation's parameters.

Parameter	Description
exceptions	The list of the operation's exceptions.
contexts	The list of the operation's contexts.

ValueDescription

```
struct CORBA::ValueDescription
```

This interface describes a value type that is stored in the Interface Repository.

Values

```
CORBA::String_var name
```

The name of the type.

```
CORBA::String_var id
```

The repository id of the type.

```
CORBA::Boolean is_abstract
```

If this variable is true, the value is an abstract value type.

```
CORBA::Boolean is_custom
```

If this variable is true, the valuetype is custom marshalled.

```
CORBA::String_var defined_in
```

The repository Id of the module in which this type is defined.

```
CORBA::String_var version
```

The type's version.

```
CORBA::RepositoryIdSeq& supported_interfaces
```

The list of interfaces which this value type supports.

```
CORBA::RepositoryIdSeq& abstract_base_values
```

The list of abstract value types from which this value inherits.

```
CORBA::Boolean is_truncatable
```

If this variable is true, the value type can be truncated to its base value type safely.

```
CORBA::String_var base_value
```

The value types from which this value inherits.

WstringDef

```
class WstringDef : public CORBA::IDLType, public  
CORBA::Object
```

This class is used to describe Unicode strings that are stored in the interface repository. It provides methods for setting and retrieving the bounds of a Unicode string.

WStringDef methods

`CORBA::ULong bound () ;`

This method returns the bounds of the `Wstring`.

`void members(CORBA::ULong bound) ;`

This method sets the bounds of the `Wstring`.

Parameter	Description
<code>members</code>	The list of members.

Activation interfaces and classes

This section describes the interfaces and classes used in the activation of object implementations.

ImplementationStatus

```
struct ImplementationStatus
```

ImplementationStatus is used to track the activation state for a server that is registered with the OAD.

```
module Activation
{
    . . .
    struct ImplementationStatus {
        extension::CreationImplDef    impl;
        ObjectStatusList              status;
    };
    . . .
};
```

Include file

Include the `oad_c.hh` file when you use this class.

ImplementationStatus members

```
CreationImplDef impl;
```

The OAD registration information for the object implementation.

```
ObjectStatusList status;
```

Represents a list of status information for each object offered by the server. See [“ObjectStatusList” on page 122](#) for information on the `ObjectStatusList` class.

OAD

The OAD interface provides access to the OAD (Object Activation Daemon). It is used by the administration tools for listing, registering, and unregistering objects. It can also be used by client code for programmatic administration of the OAD.

The following code sample shows the OAD IDL:

```
interface OAD {
    extension::CreationImplDef create_CreationImplDef();

    Object reg_implementation(in extension::CreationImplDef
impl)
        raises(DuplicateEntry, InvalidPath);
};
```

```

extension::CreationImplDef get_implementation(
    in COBRA::RepositoryId repId,
    in string object_name)
    raises(NotRegistered);

void change_implementation(
    in extension::CreationImplDef old_info,
    in extension::CreationImplDef new_info)
    raises(NotRegistered, InvalidPath, IsActive);

attribute boolean destroy_on_unregister;

void unreg_implementation(
    in CORBA::RepositoryId repId,
    in string object_name)
    raises(NotRegistered);

void unreg_interface(in CORBA::RepositoryId repId)
    raises(NotRegistered);

void unregister_all();

ImplementationStatus get_status(
    in CORBA::RepositoryId repId,
    in string object_name)
    raises(NotRegistered);

ImplStatusList get_status_interface(
    in CORBA::RepositoryId repId)
    raises(NotRegistered);

ImplStatusList get_status_all();

Object lookup_interface(in CORBA::RepositoryId repId,
in long timeout)
    raises(NotRegistered, FailedToExecute,
    NotResponding, Busy);

Object lookup_implementation(in CORBA::RepositoryId
repId, in string object_name, in long timeout)
    raises(NotRegistered, FailedToExecute,
    NotResponding, Busy);

extension::CreationImplDef boa_activate_obj(
    in Object obj,
    in string repository_id,
    in long unique_id)
    raises(NotRegistered);

void boa_deactivate_obj(in Object obj,
    in string repository_id,
    in long unique_id)
    raises(NotRegistered);

string generated_command(in extension::CreationImplDef
impl);

string generated_environment(in extension::CreationImplDef

```

```
impl);
};
```

For a complete description of the IDL source codes, refer to the `oad.idl` file located in the VisiBroker installation in the following directory:

```
<install_dir>\idl\
```

Include file

Include the `oad_c.hh` file when you use this class.

OAD methods

```
void change_implementation(const
    extension::CreationImplDef& _old_info,
    const extension::CreationImplDef& _new_info);
```

This method changes an objects implementation dynamically. You can use this method to change the registration's activation policy, path name, argument settings, and environment settings.

Parameter	Description
<code>_old_info</code>	The information you want to change.
<code>_new_info</code>	The information to replace the old info.

Exception	Description
<code>NotRegistered</code>	The object you specify is not registered. You must specify a registered object.
<code>IsActive</code>	The object implementation is currently running. Deactivate the object and then try to change its information.
<code>InvalidPath</code>	The implementation class or executable you specify cannot be located.

Caution

You cannot change information for a currently active implementation. Be sure to exercise caution when changing an object's implementation name and object name with this method. Doing so will prevent client applications from locating the object using the old name.

```
extension::CreationImplDef_ptr
create_CreationImplDef();
```

Returns an instance of an `extension::CreationImplDef_ptr` object. You can then set its attributes as explained in [“CreationImplDef impl;” on page 117](#).

```
void destroy_on_unregister(CORBA::Boolean val);
```

Sets the `destroy_on_unregister` attribute for the OAD.

Parameter	Description
<code>val</code>	If set to <code>TRUE</code> , any active implementations are shut down when they are unregistered. Otherwise, they will not be shut down when unregistered.

Note

Currently, this attribute cannot be set programatically.

```
CORBA::Boolean destroy_on_unregister();
```

Returns the setting for the `destroy_on_unregister` attribute for an implementation. If the attribute is set to `TRUE`, any active implementations are shut down when unregistered.

```
extension::CreationImplDef_ptr get_implementation(const char *repId, const char *object_name);
```

This method retrieves information about implementations registered for the specified repository identifier and object name. It returns a `extension::CreationImplDef_ptr` object.

Parameter	Description
<code>repId</code>	The repository identifier.
<code>object_name</code>	The object name.

Exception	Description
<code>NotRegistered</code>	The object you specify is not registered. You must specify a registered object.

```
ImplementationStatus *get_status(const char *repId, const char *object_name);
```

This method retrieves the status information about implementations registered for the specified repository identifier and object name.

Parameter	Description
<code>repId</code>	The repository identifier.
<code>object_name</code>	The object name.

Exception	Description
<code>NotRegistered</code>	The object you specify is not registered. You must specify a registered object.

```
ImplStatusList *get_status_all();
```

Returns an `ImplStatusList` containing the status information for all implementations.

```
ImplStatusList *get_status_interface(const char *repId);
```


This method gets the status information about implementations registered for the specified repository identifier.

Parameter	Description
repId	The repository identifier.

Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
::CORBA::Object_ptr reg_implementation(  
    const extension::CreationImplDef& _impl);
```

This method registers an implementation with the OAD and the VisiBroker directory service.

Parameter	Description
_impl	The instance of CreationImplDef.

Exception	Description
DuplicateEntry	The object you specify is a duplicate entry. You must specify an unregistered object.
InvalidPath	The implementation class or executable you specify cannot be located.

```
void unreg_implementation(const char *repId, const char  
    *object_name);
```

This method unregisters implementations by repository identifier and object name. If the `destroy_on_unregister` attribute is set to `true`, this method terminates all processes currently implementing the repository identifier and object name that is specified.

Parameter	Description
repId	The repository identifier.
object_name	The object name.

Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
void unreg_interface(const char *repId);
```

This method unregisters all implementations for a repository identifier. If the `destroy_on_unregister` attribute is set to `true`, this method terminates all processes currently implementing the repository identifier specified.

Parameter	Description
repId	The repository identifier.

Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
void unregister_all();
```

This method unregisters all implementations. Unless the attribute `destroy_on_unregister` is set to true, all active implementations continue to execute.

ObjectStatus

```
struct ObjectStatus
```

This structure is used to store information about a particular object offered by an object implementation that is registered with the OAD. This structure is returned by the `ObjectStatusList` class, described in [“ObjectStatusList” on page 122](#).

```
module Activation
{
    . . .
    struct ObjectStatus {
        long          unique_id;
        State         activation_state;
        Object        objRef;
    };
    . . .
};
```

Include file

Include the `oad_c.hh` file when you use this class.

ObjectStatus members

```
CORBA::Long unique_id;
```

A unique identifier for the object.

```
State activation_state;
```

The object's current activation state. It can be one of these values:

- ACTIVE
- INACTIVE
- WAITING_FOR_ACTIVATION

```
CORBA::Object objRef;
```

The object whose state is represented in the structure.

ObjectStatusList

```
class ObjectStatusList
```

This class implements a list of `ObjectStatus` structures and is used to represent information about the objects offered by a server.

See also

[“ObjectStatus” on page 122](#).

Include file

Include the `oad_c.hh` file when you use this class.

ObjectStatusList methods

```
void length(CORBA::ULong len);
```

Sets the length of the list.

Parameter	Description
<code>len</code>	The length of the list.

```
CORBA::ULong length() const;
```

Returns the length of the list.

```
CORBA::ULong maximum() const;
```

Returns the maximum length of the list.

```
ObjectStatus& operator [](CORBA::ULong index);
```

Returns the `ObjectStatus` structure with the specified index in the list.

Parameter	Description
<code>index</code>	The zero-based index of the item in the list.

Naming Service interfaces and classes (C++)

This section describes the interfaces and classes for the VisiBroker Naming Service (VisiNaming).

NamingContext

```
class _VISNMEEXPORT NamingContext : public virtual  
CORBA_Object
```

This object is used to contain and manipulate a list of names that are bound to the VisiBroker ORB objects or to other NamingContext objects. Client applications use this interface to resolve or list all of the names within that context. Object implementations use this object to bind names to object implementations or to bind a name to a NamingContext object.

Include file

Include the file `CosNaming_c.hh` when using this class.

Code sample

The code sample below shows the IDL specification for the NamingContext.

```
module CosNaming {  
    interface NamingContext {  
        void bind(in Name n, in Object obj)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void rebind(in Name n, in Object obj)  
            raises(NotFound, CannotProceed, InvalidName);  
        void bind_context(in Name n, in NamingContext nc)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void rebind_context(in Name n, in NamingContext nc)  
            raises(NotFound, CannotProceed, InvalidName);  
        Object resolve(in Name n)  
            raises(NotFound, CannotProceed, InvalidName);  
        void unbind(in Name n)  
            raises(NotFound, CannotProceed, InvalidName);  
        NamingContext new_context();  
        NamingContext bind_new_context(in Name n)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void destroy()  
            raises(NotEmpty);  
        void list(in unsigned long how_many,  
                out BindingList bl,  
                out BindingIterator bi);  
    };  
};
```

NamingContext methods

```
virtual void bind(const Name& _n, CORBA::Object_ptr _obj);
```

If the parameter `_n` is a complex name, this method attempts to bind the specified Object to the specified Name by resolving the context associated with the first NameComponent and then binding the object to the new context using the following Name:

```
Name [NameComponent<sub>2</sub>, . . . ,  
      NameComponent<sub>(n-1)</sub>, NameComponent<sub>n</sub>]
```

This recursive process of resolving and binding continues until the context associated with the NameComponent ($n-1$) is resolved and the actual name-to-object binding is stored. If parameter `_n` is a simple name, `_obj` will be bound to `_n` within this NamingContext.

Parameter	Description
<code>_n</code>	A Name, initialized with the desired name for the object.
<code>_obj</code>	The object to be bound.

This method may raise the following exceptions: .

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the <code>id</code> field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void rebind(const Name& _n, CORBA::Object_ptr  
  _obj);
```

This method is exactly the same as the `bind` method, except that it never raises the `AlreadyBound` exception. If the specified Name has already been bound to another object, this method replaces that binding with the new binding.

Parameter	Description
<code>_n</code>	A Name structure, initialized with the desired name for the object.
<code>_obj</code>	The object to be rebound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual void bind_context(const Name& _n, NamingContext_ptr  
 _nc);
```

This method is identical to the bind method, except that it associates the supplied Name with a NamingContext, not an arbitrary VisiBroker ORB object.

Parameter	Description
_n	A Name structure initialized with the desired name for the naming context. The first (<i>n-1</i>) NameComponent structures in the sequence must resolve to a NamingContext.
_nc	The NamingContext object to be bound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void rebind_context(const Name& _n,  
 NamingContext_ptr _nc);
```

This method is exactly the same as the bind_context method, except that this method never raises the AlreadyBound exception. If the specified Name has already been bound to another naming context, this method replaces that binding with the new binding.

Parameter	Description
_n	A Name structure, initialized with the desired name for the object.
_nc	The NamingContext object to be rebound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual CORBA::Object _ptr resolve(const Name& _n);
```

This method attempts to resolve the specified Name and return an object reference. If parameter *_n* is a *simple name*, it is resolved relative to this NamingContext.

If *_n* is a *complex name*, it is resolved using the context associated with the first NameComponent. Next, the new context to resolve the following Name:

```
Name [NameComponent<sub>(2)</sub>, . . . ,  
      NameComponent<sub>(n-1)</sub>, NameComponent<sub>n</sub>]
```

This recursive process continues until the object associated with the *n*th NameComponent is returned.

Parameter	Description
<i>_n</i>	A Name structure, initialized with the name for the desired object.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual void unbind(const Name& _n);
```

This method performs the inverse operation of the `bind` method, removing the binding associated with the specified Name.

Parameter	Description
<i>_n</i>	A Name structure, initialized with the desired name to be unbound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.

Exception	Description
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual NamingContext_ptr new_context ();
```

This method creates a new naming context. The newly created context is implemented within the same server as this object. The new context is initially not bound to any Name.

```
virtual NamingContext_ptr bind_new_context(const Name& _n)  
    raises ;
```

This method creates a new context and binds it to the specified Name within this Context.

Parameter	Description
_n	A Name structure, initialized with the specified Name for the newly created NamingContext object.

The following exceptions can be raised by this method.

Exception	Description
NotFound	The Name or one of its components could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned NamingContext.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void destroy ();
```

This method deactivates this naming context. Any subsequent attempt to invoke operations on this object raises a CORBA::OBJECT_NOT_EXIST runtime exception.

Before using this method, all Name objects that have been bound relative to this NamingContext should be unbound using the unbind method. Any attempt to destroy a NamingContext that is not empty raises a NotEmpty exception.

The following exceptions can be raised by this method.

Exception	Description
NotEmpty	The NamingContext to be destroyed is not empty.

```
virtual void list(CORBA::ULong _how_many, BindingList_out  
    _bl,  
    BindingIterator_out _bi)
```

This method returns all of the bindings contained by this context. A maximum of `_how_many` Names are returned with the BindingList. Any

left over bindings are returned via the `BindingIterator`. The returned `BindingList` and `BindingIterator` are described in detail in [“Binding and BindingList” on page 132](#) and can be used to navigate the list of names.

Parameter	Description
<code>_how_many</code>	The maximum number of Names to be returned.
<code>_bl</code>	A list of Names returned to the caller. The number of names in the list will not exceed <code>how_many</code> .
<code>_bi</code>	An iterator for use in traversing the rest of the Names.

NamingContextExt

```
class _VISNMEXPORT NamingContextExt : public virtual
    NamingContext, public virtual CORBA_Object
```

The `NamingContextExt` interface, which extends `NamingContext`, provides the operations required to use stringified names and URLs.

Include file

Included the naming file `CosNaming_c.hh` when you use this class.

Code sample

This code sample shows the IDL Specification for the `NamingContextExt` interface.

```
module CosNaming {
    interface NamingContextExt {
        typedef string StringName;
        typedef string Address;
        typedef string URLString;
        StringName to_string(in Name n)
            raises(InvalidName);
        Name to_name(in StringName sn)
            raises(InvalidName);
        exception InvalidAddress {};
        URLString to_url(in Address addr, in StringName sn)
            raises(InvalidAddress, InvalidName);
        Object resolve_str(in StringName n)
            raises(NotFound, CannotProceed, InvalidName);
    };
};
```

NamingContextExt methods

```
virtual char* to_string(const Name& _n);
```

This operation returns the stringified representation of the specified Name.

Parameter	Description
<code>_n</code>	A Name structure initialized with the desired name for object.

The following exception can be raised by this method.

Exception	Description
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual Name* to_name(const char* _sn);
```

This operation returns a Name object for the specified stringified name.

Parameter	Description
_sn	The stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual char* to_url(const char* _addr, const char* _sn);
```

This operation returns a fully-formed string URL using the URL specified in _addr and the stringified name in _sn.

Parameter	Description
_addr	A URL component of the form myhost.inprise.com:800. If the Address is empty, it is the local host.
_sn	A stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
InvalidAddress	The specified Address is malformed.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual CORBA::Object_ptr resolve_str(const char* _n);
```

This operation returns a Name object for the specified stringified name.

Parameter	Description
_n	A stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.

Exception	Description
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned NamingContext.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

Binding and BindingList

The Binding, BindingList, and BindingIterator interfaces are used to describe the name-object bindings contained in a NamingContext. The Binding struct encapsulates one such pair. The binding_name field represents the Name and the binding_type indicates whether the Name is bound to a VisiBroker ORB object or a NamingContext object.

The BindingList is a sequence of Binding structures contained by a NamingContext object. An example program that uses the BindingList can be found in <install dir>/examples/vbroker/ins/pluggable_adaptor.

Include file

Include the file CosNaming_c.h when you use these data types and structure.

Code sample

This code sample shows the IDL specification for the Binding structure.

```

module CosNaming {
    enum BindingType {
        nobject,
        ncontext
    };
    struct Binding {
        Name binding_name;
        BindingType binding_type;
    };
    typedef sequence <Binding> BindingList;
};

```

BindingIterator

```

class _VISNMEEXPORT BindingIterator : public virtual
CORBA_Object

```

This object allows a client application to walk through the unbounded collection of bindings returned by the NamingContext operation list. An example program that uses the BindingIterator can be found in <install dir>/examples/vbroker/ins/pluggable_adaptor.

Include file

Include the file CosNaming_c.h when you use this class.

Code sample

This code sample shows the IDL specification for the BindingIterator interface.

```
module CosNaming {
    interface BindingIterator {
        boolean next_one(out Binding bl);
        boolean next_n(in unsigned long how_many, out
BindingList b);
        void destroy();
    };
};
```

BindingIterator methods

```
virtual CORBA::Boolean next_one(Binding_out _b);
```

This method returns the next Binding from the collection. It returns CORBA::FALSE if the list has been exhausted. Otherwise, it returns CORBA::TRUE.

Parameter	Description
_b	The next Binding object from the list.

```
virtual CORBA::Boolean next_n(CORBA::ULong _how_many,
BindingList_out _bl);
```

This method returns a BindingList containing the number of requested Binding objects from the list. The number of bindings returned may be less than the requested amount if the list is exhausted. FALSE is returned when the list has been exhausted. Otherwise, TRUE is returned.

Parameter	Description
_how_many	The maximum number of Binding object desired.
_bl	A BindingList containing no more than the requested number of Binding objects.

```
virtual void destroy();
```

This method destroys this object and releases the memory associated with the object. Failure to call this method will result in increased memory usage.

NamingContextFactory

```
class _VISNEXPORT NamingContextFactory : public virtual
CORBA_Object
```

This interface is provided to instantiate an initial NamingContext. A client may bind to an object of this type and use the create_context method to create an initial context. Once the initial context has been created, the new_context method can be used to create other contexts. An instance of this naming context factory is created when the naming service is started, described in the Naming Service section of the *VisiBroker C++ Developer's Guide*.

To create an initial NamingContextFactory that automatically creates a single root context, go to [“ExtendedNamingContextFactory” on page 135](#).

Include file

Include the file CosNamingExt_c.hh when you use this class.

Code sample

This code sample shows the IDL specification for the NamingContextFactory.

```
module CosNamingExt {
    interface NamingContextFactory {
        CosNaming::NamingContextExt create_context();
        ClusterManager get_cluster_manager();
        void remove_stale_contexts(in string password);
        NamingContextList list_all_roots(in string password);
        oneway void shutdown();
    };
};
```

Methods

```
virtual CosNaming::NamingContextExt_ptr
    create_context();
```

This method allows a client to create a naming context. Since the specification for naming contexts states that they do not have any notion of a root context, simply instantiating a NamingContextFactory does not create a naming context.

```
virtual ClusterManager_ptr get_cluster_manager();
```

This method returns the cluster manager.

```
virtual NamingContextList* list_all_roots (const char*
    _password);
```

This method lists a minimum set of root contexts which allows you to access every context in the namespace.

```
virtual void remove_stale_contexts (const char*
    _password);
```

This method allows the client to remove bindings which relate to a destroyed context.

```
virtual void shutdown();
```

This method allows a client to shut the naming service down gracefully. If the service is restarted with the same backing store, the factory is restored to the state it had prior to being shut down.

ExtendedNamingContextFactory

```
class _VISNMEXPORT ExtendedNamingContextFactory :  
    public virtual CosNamingExt::NamingContextFactory,  
    public virtual CORBA_Object
```

This interface extends the NamingContextFactory interface and allows the creation of a default root within a factory when the extended naming service is started, described in the Naming Service section of the *VisiBroker C++ Developer's Guide*.

Include file

Include the file CosNamingExt_c.hh when you use this class.

Code sample

This code sample shows the IDL specification for the ExtendedNamingContextFactory.

```
module CosNamingExt {  
    interface ExtendedNamingContextFactory :  
    NamingContextFactory{  
        CosNaming::NamingContextExt root_context();  
    };  
};
```

Methods

```
virtual CosNaming::NamingContextExt_ptr root_context();
```

This method returns the root naming context that was created automatically when this object was instantiated.

Event service interfaces and classes

This section describes the interfaces and classes for the VisiBroker for C++ Event Service.

ConsumerAdmin

```
public interface ConsumerAdmin extends ConsumerAdminPOA
```

This interface is used by consumer applications to obtain a reference to a proxy supplier object. This is the second step in connecting a consumer application to an `EventChannel`.

IDL definition

```
module CosEventChannelAdmin {  
    interface ConsumerAdmin {  
        ProxyPushSupplier obtain_push_supplier();  
        ProxyPullSupplier obtain_pull_supplier();  
    };  
};
```

ConsumerAdmin methods

```
public ProxyPushSupplier obtain_push_supplier();
```

The `obtain_push_supplier` method should be invoked if the calling consumer application is implemented using the push model. If the application is implemented using the pull model, the `obtain_pull_supplier` method should be invoked.

```
public ProxyPullSupplier obtain_pull_supplier();
```

The returned reference is used to invoke either the `connect_push_consumer`, described in , or the `connect_pull_consumer` method, described in [“ProxyPullConsumer” on page 139](#).

EventChannel

```
public interface EventChannel
```

The `EventChannel` provides the administrative operations for adding suppliers and consumers to the channel and for destroying the channel. For information on creating an event channel, see [“EventChannelFactory” on page 138](#).

Suppliers and consumers both use the `_bind` method to obtain an `EventChannel` reference. As with any `_bind` invocation, the caller can optionally specify the object name of the desired `EventChannel` as well as any desired bind options. These arguments can be passed to the supplier or consumer as initial parameters or they may be obtained from the Naming Service, if it is available. If the object name is not specified, VisiBroker Edition locates a suitable `EventChannel`. Once a supplier or consumer is

connected to an EventChannel, it may invoke any of the EventChannel methods.

IDL definition

```
module CosEventChannelAdmin {
    interface EventChannel {
        ConsumerAdmin for_consumers();
        SupplierAdmin for_suppliers();
        void destroy();
    };
};
```

Methods

The following code sample shows the supplier binding to an EventChannel with the object name "power".

```
int main(int argc, char* const* argv)
{
    ...
    CosEventChannelAdmin::EventChannel_var my_channel
=
    CosEventChannelAdmin::EventChannel::_bind("power");
    CosEventChannelAdmin::SupplierAdmin_var =
    channel->for_suppliers();
    ...
}
```

```
ConsumerAdmin for_consumers();
```

This method returns a ConsumerAdmin object that can be used to add consumers to this EventChannel.

```
SupplierAdmin for_suppliers();
```

This method returns a SupplierAdmin object that can be used to add suppliers to this EventChannel.

```
void destroy();
```

This method destroys this EventChannel.

EventChannelFactory

```
public interface EventChannelFactory
```

The EventChannelFactory provides methods for creating, locating, and destroying event channels.

IDL definition

```
module CosEventChannelAdmin {
    interface EventChannelFactory {
        exception AlreadyExists();
        exception ChannelsExist();
        EventChannel create();
    };
};
```

```

        EventChannel create_by_name(in string name)
            raises(AlreadyExists);
        EventChannel lookup_by_name(in string name);
        void destroy()
            raises(ChannelsExist);
    };
};

```

EventChannelFactory methods

```
EventChannel create();
```

This method creates an anonymous, transient event channel.

```
EventChannel create_by_name(in string name)
    raises(AlreadyExists);
```

This method creates a named, persistent event channel. If an event channel with the specified name has already been created, an `AlreadyExists` exception is raised.

```
EventChannel lookup_by_name(in string name);
```

This method attempts to return the `EventChannel` with the specified name. If no channel with the specified name exists, a `NULL` value is returned.

```
void destroy();
```

This method destroys this event channel. The disconnect methods of all suppliers and consumers connected to the channel are called before the channel is destroyed. Once destroyed, if the channel was created by the `create_by_name` method, it is no longer found by the `lookup_by_name` method.

ProxyPullConsumer

```
public interface ProxyPullConsumer
```

This interface is used by a pull supplier application and provides the `connect_pull_supplier` method for connecting the supplier's `PullSupplier`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same proxy more than once. It can also raise the `TypeError` exception if the proxy objects of an event channel implementation impose additional type constraints that are connected to them.

IDL definition

```

module CosEventChannelAdmin {
    exception AlreadyConnected();
    interface ProxyPullConsumer :
    CosEventComm::PullConsumer {
        void connect_pull_supplier(
            in CosEventComm::PullSupplier pull_supplier)
            raises(AlreadyConnected, TypeError);
    };
};

```

ProxyPushConsumer

```
public interface ProxyPushConsumer
```

This interface is used by a push supplier application and provides the `connect_push_supplier` method which is used to connect the supplier's `PushSupplier`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same proxy more than once.

IDL definition

```
module CosEventChannelAdmin {  
    exception AlreadyConnected();  
    interface ProxyPushConsumer :  
    CosEventComm::PushConsumer {  
        void connect_push_supplier(  
            in CosEventComm::PushSupplier push_supplier)  
            raises (AlreadyConnected);  
    };  
};
```

ProxyPullSupplier

```
public interface ProxyPullSupplier
```

This interface is used by a pull consumer application and provides the `connect_pull_consumer` method which is used for connecting the consumer's `PullConsumer`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same `PullConsumer` more than once.

IDL definition

```
module CosEventChannelAdmin {  
    exception AlreadyConnected();  
    interface ProxyPullSupplier :  
    CosEventComm::PullSupplier {  
        void connect_pull_consumer(  
            in CosEventComm::PullConsumer pull_consumer)  
            raises (AlreadyConnected);  
    };  
};
```

ProxyPushSupplier

```
public interface ProxyPushSupplier
```

This interface is used by a push consumer application and provides the `connect_push_consumer` method which is used to connect the consumer's `PushConsumer`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same `PushConsumer` more than once. It can also raise the `TypeError` exception if the proxy objects of an event channel implementation impose additional type constraints that are connected to them.

IDL definition

```
module CosEventChannelAdmin {
    exception AlreadyConnected();
    interface ProxyPushSupplier :
    CosEventComm::PushSupplier {
        void connect_push_consumer(
            in CosEventComm::PushConsumer push_consumer)
            raises(AlreadyConnected, TypeError);
    };
};
```

PullConsumer

```
public interface PullConsumer
```

This interface is used to derive consumer objects that use the pull model of communication. The `pull` method is called by a consumer whenever it wants data from the supplier. A `Disconnected` exception is raised if the supplier has disconnected.

The `disconnect_pull_consumer` method is used to deactivate this consumer if the channel is destroyed.

IDL definition

```
module CosEventComm {
    exception Disconnected {};
    interface PullConsumer {
        void push(in any data) raises(Disconnected);
        void disconnect_pull_consumer();
    };
};
```

PushConsumer

```
public interface PushConsumer
```

This interface is used to derive consumer objects that use the push model of communication. The `push` method is used by a supplier whenever it has data for the consumer. A `Disconnected` exception is raised if the consumer has disconnected.

IDL definition

```
module CosEventComm {
    exception Disconnected();
    interface PushConsumer {
        void push(in any data) raises(Disconnected);
        void disconnect_push_consumer();
    };
};
```

PullSupplier

```
public interface PullSupplier
```

This interface is used to derive supplier objects that use the pull model of communication.

IDL definition

```
module CosEventComm {
    interface PullSupplier {
        any pull() raises(Disconnected);
        any try_pull(out boolean has_event)
        raises(Disconnected);
        void disconnect_pull_supplier();
    };
};
```

PullSupplier methods

```
any pull();
```

This method blocks until there is data available from the supplier. The data is returned an Any type. If the consumer has disconnected, this method raises a Disconnected exception.

```
any try_pull(out boolean has_event);
```

This non-blocking method attempts to retrieve data from the supplier. When this method returns, `has_event` is set to the value `true` and the data is returned as an Any type if there was data available. If the value of `has_event` is `false`, then no data is available and the return value is `NULL`.

```
void disconnect_pull_supplier();
```

This method deactivates this pull server if the channel is destroyed.

PushSupplier

```
public interface PushSupplier
```

This interface is used to derive supplier objects that use the push model of communication. The `disconnect_push_supplier` method is used by the `EventChannel` to disconnect supplier when it is destroyed.

IDL definition

```
module CosEventComm {
    exception AlreadyConnected();
    interface PushSupplier {
        void disconnect_push_supplier();
    };
};
```

SupplierAdmin

```
public interface SupplierAdmin
```

This interface is used by supplier applications to obtain a reference to the proxy consumer object. This is the second step in connecting a supplier application to an EventChannel.

IDL definition

```
module CosEventChannelAdmin {  
    interface SupplierAdmin {  
        ProxyPushConsumer obtain_push_consumer();  
        ProxyPullConsumer obtain_pull_consumer();  
    };  
};
```

```
public ProxyPushConsumer obtain_push_consumer();
```

The `obtain_push_consumer` method should be invoked if the supplier application is implemented using the push model. If the application is implemented using the pull model, the `obtain_pull_consumer` method should be invoked.

```
public ProxyPullConsumer obtain_pull_consumer();
```

The returned reference is used to invoke either the [connect_push_supplier](#) or the [connect_pull_supplier](#) method.

Server Manager Interfaces and Classes

This section describes the VisiBroker for C++ Server Manager interfaces and classes. For additional information about the Server Manager, see “Using the VisiBroker Server Manager” in the *VisiBroker for C++ Developer's Guide*.

The Container Interface

```
class _VISSVMGREXPOR Container : public virtual
    CORBA_Object
```

A container can hold properties, operations, and other containers. Each major ORB component is represented as a container. The top-level container does not support any properties or operations but contains child containers, such as the ORB container. The ORB container in turn contains ORB properties, a shutdown method, and other containers like RootPOA, Agent, DebugLogger, ServerEngines and so forth.

Include file

Include the file `servermgr_c.hh` when using this class.

The Container Interface

This section explains the C++ methods that can be executed on the container interface. There are four categories:

- Methods related to property manipulation and queries
- Methods related to operations
- Methods related to children containers
- Methods related to storage

Methods related to property manipulation and queries

```
virtual CORBA::StringSequence* list_all_properties();
```

Returns the names of all the properties in the container as a `StringSequence`.

```
virtual PropertySequence* get_all_properties();
```

Returns the `PropertySequence` containing the names, values, and read-write status of all the properties in the container.

```
virtual Property* get_property(const char * name);
```

Returns the value of the property *name* passed as an input parameter.

Parameter	Description
<code>name</code>	The name of the property.

It throws `NameInvalid` exception if the parameter passed is not a valid property name.

```
virtual void set_property(const char* name, CORBA::Any&
    value);
```

Sets the value of the property *name* to the requested *value*.

Parameters	Descriptions
name	The name of the property whose value is to be set.
value	The property value as <i>Any</i> type.

It can throw these exceptions:

- `NameInvalid` if the property name is invalid, for example if the property does not exist in the container.
- `ValueInvalid` if the property value is not valid.
- `ValueNotSettable` if the property value cannot be set, for example if the property is read-only.

```
virtual void persist_properties(CORBA::Boolean
    recurse);
```

Causes the container to actually store its properties to the associated [“Storage Interface Methods for C++” on page 149](#). If no storage is associated with the container, a `StorageException` will be raised. When it is invoked with the parameter `recurse=true`, the properties of the children containers are also stored into the storage. It is up to the container to decide if it has to store all the properties or only the changed properties.

Parameter	Description
recurse	Indicates whether the sub-containers' <i>persist_properties</i> should be called recursively.

It throws `StorageException` exception if an error occurs while persisting the properties.

```
virtual void restore_properties(CORBA::Boolean
    recurse);
```

Instructs the container to obtain its properties from the storage. A container knows exactly what properties it manages and it attempts to read those properties from the storage. The containers shipped with the ORB do not support restoring from the storage. You must create containers that support this feature yourself.

Parameter	Description
recurse	Indicates whether the sub-containers' <i>restore_properties</i> should be called recursively.

It throws `StorageException` exception if an error occurs while restoring the properties.

Methods related to operations

```
virtual CORBA::StringSequence* list_all_operations();
```

Returns the names of all the operations supported in the container.

```
virtual OperationSequence* get_all_operations();
```

Returns all the operations along with the parameters and the type code of the parameters so that the operation can be invoked with the appropriate parameters.

```
virtual Operation* get_operation(const char* name);
```

Returns the parameter information of the operation specified by *name* which can be used to invoke the operation.

Parameter	Description
name	The name of the operation to get the parameter information.

It can throw *NameInvalid* exception if the parameter specifies an operation which is not supported.

```
CORBA::Any* do_operation(const Operation& op);
```

Invokes the method in the operation and returns the result.

Parameter	Description
op	The operation which is to be performed on the server.

It can throw these exceptions:

- *NameInvalid* if the operation is not defined on the container.
- *OperationFailed* if the operation failed to execute.
- *ValueInvalid* if the value for any of the parameter is not of the expected type.

Methods related to children containers

```
virtual CORBA::StringSequence* list_all_containers();
```

Returns the names of all the children containers of the current container.

```
virtual NamedContainerSequence* get_all_containers();
```

Returns all the named children containers.

```
virtual NamedContainer* get_container(const char *  
    name) ;
```

Returns the named child container identified by the *name* parameter.

Parameter	Description
name	The name of the container on which the children containers are to be queried.

If there is no child container with this name, a `NameInvalid` exception is raised.

```
virtual void add_container(const NamedContainer&
    container);
```

Adds the container as a child container of this *container*.

Parameter	Description
container	The named container to be added into this container.

It throws `NameAlreadyPresent` exception if a container with the specified name already exists. It throws `ValueInvalid` exception if the named container value is invalid.

```
virtual void set_container (const char * name,
    Container_ptr value);
```

Modifies the child container identified by the *name* parameter to one in the *value* parameter.

Parameter	Description
name	The name of the container whose value is to be replaced.
value	The new child container.

It can throw these exceptions:

- `NameInvalid` if no container with the specified name exists.
- `ValueNotSettable` if the i the container could not be replaced, for example if the original container is created to be irreplaceable.
- `ValueInvalid` if the named container value is invalid.

Methods related to storage

```
virtual void set_storage(Storage_ptr s, CORBA::Boolean
    recurse);
```

Sets the storage of this container. If *recurse=true*, it also sets the storage for all its children as well.

Parameter	Description
s	The new storage to be set.
recurse	Indicates whether to set the storage recursively for the children containers.

```
virtual Storage_ptr get_storage();
```

Returns the current storage of the container.

The Storage Interface

```
class _VISSVMGREXPORT Storage : public virtual
    CORBA_Object
```

The Server Manager provides an abstract notion of *storage* that can be implemented in any fashion. Individual containers may choose to store their properties in databases, flat files, or some other means. The storage implementation included with the VisiBroker ORB uses a flat-file-based approach.

Include file

Include the file `servermgr_c.hh` when using this class.

Storage Interface Methods for C++

```
virtual void open();
```

Opens the storage and makes it ready for reading and writing the properties. For the database-based implementation, logging into the database is performed in this method.

It can throw *StorageException* if the storage could not be opened for any reasons.

```
virtual void close();
```

Closes the storage. This method also updates the storage with any properties that have been changed since the last `Container::persist_properties` call. In database implementations, this method closes the database connection.

It can throw *StorageException* if the closing fails for any reasons.

```
virtual Container::PropertySequence* read_properties();
```

Reads all the properties from the storage. It can throw *StorageException* if the properties could not be read from the Storage.

```
virtual Container::Property* read_property(const char *
    propertyName);
```

Returns the property value for *propertyName* read from the storage.

Parameter	Description
-----------	-------------

It throws *NameInvalid*. exception if the property name is not known to the container. It throws *StorageException* if an error occurs while reading the property from the storage.

```
virtual void write_properties( const
    Container::PropertySequence& p);
```

Saves the property sequence into the storage.

Parameter	Description
p	The sequence of properties which have been changed in the session.

It can throw `StorageException` if an error occurs while writing the properties to storage.

```
virtual void write_property( const Container::Property&
    p);
```

Saves the single property into the storage.

Parameter	Description
p	The property which is to be written to the persistent storage.

It can throw `StorageException` if an error occurs while writing the property to storage.

Transaction Service interfaces and classes

This section describes the VisiBroker VisiTransact Transaction Service interfaces and classes.

CosTransactions and VISTransactions modules

This section introduces the `CosTransactions` and `VisTransactions` modules, and describes the data types, structures, and exceptions for the `CosTransactions` module.

Looking at the CosTransactions module

The `CosTransactions` module is the Transaction Service IDL that conforms to the final OMG Transaction Service document. This is the module to use to restrict yourself strictly to CORBA-compliant methods. The IDL for this module is contained in the file **`CosTransactions.idl`**.

You might also consider using the `VISTransactions` module, which contains the IDL for some VisiBroker VisiTransact extensions to the standard. The IDL for the `VISTransactions` module is contained in the file **`VISTransactions.idl`**. You can use **`VISTransactions.idl`** in your code to obtain both the `CosTransactions` and `VISTransactions` modules. For more information, see [“Looking at the VISTransactions module” on page 154](#).

Data types

The `CosTransactions` module defines the data types `enum Status` and `enum Vote`.

The definition for the `enum Status` data type is:

```
enum Status
{
    StatusActive,
    StatusMarkedRollback,
    StatusPrepared,
    StatusCommitted,
    StatusRolledBack,
    StatusUnknown,
    StatusNoTransaction
    StatusPreparing,
    StatusCommitting,
    StatusRollingBack,
};
```

For a description of each `Status` value, see [“Status value definitions” on page 160](#).

The `enum Vote` data type is used only by implementations of the `CosTransactions::Resource` interface. It is used to indicate the result of a `Resource`'s attempt to prepare a transaction.

The definition for the enum `Vote` data type is:

```
enum Vote
{
    VoteCommit,
    VoteRollback,
    VoteReadOnly
};
```

The `Vote` values are:

- `VoteCommit`. The Resource is able to write (or has already written) all the data needed to commit the transaction to stable storage, as well as an indication that it has prepared the transaction.
- `VoteRollback`. For any reason, the Resource could not vote to commit the transaction. This includes not having any knowledge about the transaction (which might happen after a crash).
- `VoteReadOnly`. No persistent data associated with the Resource has been modified by the transaction.

Structures

The `CosTransactions` module defines these structures, which are used to save the transaction context.

- `otid_t` contains an object transaction ID (or `otid`), which is a globally unique ID for a transaction. The `otid_t` structure is a more efficient OMG IDL version of the X/Open-defined transaction identifier (XID). The `otid_t` can be transformed to an X/Open XID and vice versa.
- `TransIdentity` contains certain key information for a transaction: its Coordinator, its Terminator (optionally), and its `otid`.
- `PropagationContext` contains a transaction's `TransIdentity` and its time-out. In addition, it contains a `TransIdentity` for the parent and each ancestor transaction, up to the top-level transaction, formatted as a sequence (or array). Because nested transactions are not implemented in `VisiTransact`, every transaction is a top-level transaction, and the parents sequence will always be empty.

For the most part, these structures are used behind the scenes; you won't reference them directly.

```
struct otid_t
{
    long formatID;
    long bqual_length;
    sequence <octet> tid;
};
struct TransIdentity
{
    Coordinator coordinator;
    Terminator terminator;
    otid_t otid;
};
struct PropagationContext
{
    unsigned long timeout;
    TransIdentity current;
    sequence <TransIdentity> parents;
    any implementation_specific_data;
};
```


When the transaction context is passed from one object to another object, usually a `TransactionalObject`, it is commonly passed as a `PropagationContext`. The `implementation_specific_data` field is reserved for the VisiTransact Transaction Service.

For the most part, these structures are used behind the scenes; you won't reference them directly. Certain methods, however, work explicitly with `PropagationContext`.

- `Coordinator::get_txcontext()` extracts a `PropagationContext`.
- `TransactionFactory::recreate()` uses a `PropagationContext` to create a new `Control` object.

The transaction context is always passed to a transactional object implicitly. In addition, a program may be passed a transaction context explicitly, as a parameter. You can use `Coordinator::get_txcontext()` to get the `PropagationContext`. For more information on propagation of transaction context, see [“TransactionalObject interface” on page 167](#).

Another method that obtains information from these structures is the `VISTransactions::Current::get_otid()` method, which extracts the `otid` from the `PropagationContext`.

Exceptions

Exceptions are divided into three categories: Standard, Heuristic, and Method-specific.

Exception	When this exception is thrown ...
<code>CORBA::INVALID_TRANSACTION</code>	The invoking thread has an invalid transaction context.
<code>CORBA::NO_PERMISSION</code>	The invoking thread does not have permission to complete the transaction. For example, only the transaction-originator thread can call this method.
<code>CORBA::TRANSACTION_REQUIRED</code>	The invoking thread does not have a transaction context.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been rolled back.
<code>CORBA::WrongTransaction</code>	Raised by the ORB when returning the response to a deferred synchronous request. This exception is raised only if the request was implicitly associated with a different transaction than the thread requesting the response through <code>Request::get_response()</code> or <code>ORB::get_next_response()</code> . See the VisiBroker section on Dynamic Invocation Interface (DII).

Exception	When this exception is thrown ...
<code>CosTransactions::HeuristicCommit</code>	The rollback operation on a Resource raises this exception to report that a heuristic decision was made, and that all relevant updates have been committed.
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made when attempting to commit the transaction. Some relevant updates have been committed and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made when attempting to commit the transaction. The disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. (In other words, the <code>HeuristicMixed</code> exception takes priority over the <code>HeuristicHazard</code> exception.)
<code>CosTransactions::HeuristicRollback</code>	The commit operation on a Resource raises this exception to report that a heuristic decision was made and that all relevant updates have been rolled back.

Exception	When this exception is thrown
<code>CosTransactions::Inactive</code>	The transaction has already been prepared.
<code>CosTransactions::InvalidControl</code>	The <code>Control</code> parameter passed to resume is not valid in the current execution environment.
<code>CosTransactions::NotPrepared</code>	A commit has been issued but the Resource has not been prepared.
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.
<code>CosTransactions::NotSubtransaction</code>	Not raised in <code>VisiTransact</code> .
<code>CosTransactions::SubtransactionsUnavailable</code>	Because <code>VisiBroker VisiTransact</code> does not support nested transactions, this exception is raised if an attempt is made to begin a transaction when a transaction is already in progress for this client thread.
<code>CosTransactions::SynchronizationUnavailable</code>	Not raised in <code>VisiTransact</code> .
<code>CosTransactions::Unavailable</code>	The requested object cannot be provided. For example, the <code>Control</code> object could not provide a <code>Terminator</code> .

Looking at the `VISTransactions` module

Interfaces in the `VISTransactions` module inherit from and extend the `CosTransactions` interfaces. The `VISTransactions` module defines no new data types, structures, or exceptions over those in `CosTransactions`. For example, the `Current` interface includes `VisiBroker VisiTransact` methods that make certain programming operations shorter and more convenient. The IDL for this module is contained in the file **`VISTransactions.idl`**.

For related information see [“Choosing a Current interface” on page 154](#) and [“Obtaining a Current object reference” on page 156](#).

Current interface

The `Current` interface defines methods to:

- Enable a program to manage transactions.
- Use implicit transaction propagation.
- Obtain information about the current transaction.
- Register Resources and Synchronization objects.

`VisiBroker VisiTransact` supports a number of extensions to the OMG Transaction Service specification--additional methods for added convenience. `VisiBroker VisiTransact` methods on the `Current` interface can simplify the use of the `VisiTransact` Transaction Service for most programs.

Choosing a Current interface

The `VisiTransact` Transaction Service provides the `Current` interface in the following IDL files:

- **`CosTransactions.idl`** contains the Transaction Service IDL that conforms to the final OMG Transaction Service document.
- **`VISTransactions.idl`** provides both the `CosTransactions` interface and the `VISTransactions` interface, which inherits and extends the `CosTransactions::Current` interface. This interface includes

VisiBroker VisiTransact extensions such as `begin_with_name()`, `register_resource()`, and others.

You should use one of these IDL files. To restrict yourself strictly to CORBA-compliant methods, use the **CosTransactions.idl**. If you decide to use any of the VisiTransact extensions, use **VISTransactions.idl**.

The following example shows the CosTransactions interface for Current.

```
...
interface Current
{
    void begin()
        raises(SubtransactionsUnavailable);
    void commit(in boolean report_heuristics)
        raises (NoTransaction,
                HeuristicMixed,
                HeuristicHazard);
    void rollback()
        raises(NoTransaction);
    void rollback_only()
        raises(NoTransaction);
    Status get_status();
    string get_transaction_name();
    void set_timeout(in unsigned long seconds);
    Control get_control();
    Control suspend();
    void resume(in Control which)
        raises(InvalidControl);
};
...
```

The next example shows the VISTransactions interface for Current.

```
interface Current : CosTransactions::Current
{
    void begin_with_name(in string user_transaction_name)
        raises(CosTransactions::SubtransactionsUnavailable);
    CosTransactions::RecoveryCoordinator
        register_resource(in CosTransactions::Resource
            resource)
            raises(CosTransactions::Inactive);
    void register_synchronization(in
        CosTransactions::Synchronization synch)
        raises(CosTransactions::NoTransaction,
            CosTransactions::Inactive,
            CosTransactions::SynchronizationUnavailable,
            CosTransactions::Unavailable);
    CosTransactions::otid_t get_otid();
        raises(CosTransactions::NoTransaction,
            CosTransactions::Unavailable);
    CosTransactions::PropagationContext get_txcontext()
        raises(CosTransactions::Unavailable,
            CosTransactions::NoTransaction);
    attribute string ots_name;
    attribute string ots_host;
    attribute string ots_factory;
};
```

Obtaining a Current object reference

To gain access to a VisiTransact-managed transaction, you must obtain an object reference to the Current object. The Current object reference is valid throughout the process.

The example below shows how a reference to the Current object is obtained using the `resolve_initial_references()` method, and then how the object returned by that method is narrowed to a `CosTransactions::Current` object.

```
int main(...)\n{\n    try\n    {\n        ... ..\n        // ORB related initialization\n        // get reference to a CosTransactions::Current instance\n        CORBA::Object_var\n        obj = orb-\n>resolve_initial_references("TransactionCurrent");\n        CosTransactions::Current_var\n        current = CosTransactions::Current::_narrow(obj);\n        ... ..\n    }\n    catch(...) { } // catch all exceptions or exceptions\n                    you care about,\n}\n}
```

VisiBroker VisiTransact offers extensions to the `Current` interface to simplify certain operations. To take advantage of these extensions, narrow to a `VISTransactions::Current` object.

```
VISTransactions::Current::_narrow(obj)
```

Using the Current object reference

The `Current` object reference is valid for the entire process under which you create it; you can use it in any thread. You can either make multiple calls to obtain references to the `Current` object or use just one reference throughout the entire process. Typically, you would obtain one reference to avoid multiple invocations of `resolve_initial_references()`.

The C++ header files that you include must also correspond to your choice of interfaces.

- For `VISTransactions`, use `#include <VISTransactions_c.hh>`.
- For `CosTransactions`, use `#include <CosTransactions_c.hh>`.

For more information, see the VisiBroker *VisiTransact Guide*.

Is your VisiTransact Transaction Service instance available?

You can issue `begin()` or `begin_with_name()` to determine if the instance of your VisiTransact Transaction Service is available. The method will raise `CORBA:NO_IMPLEMENT` exception if the instance is not available.

Calling `get_status()` when there is no available instance of the VisiTransact Transaction Service will return the current transaction state,

and cannot be used to determine if the instance of the VisiTransact Transaction Service is available.

Checked behavior

Checked behavior is supported by the VisiTransact Transaction Service to provide an extra level of transaction integrity. Specifically, checked behavior is supported for transactions originated with `Current::begin()`. The purpose of the checks is to ensure that all transactional requests made by the application have completed their processing before the transaction is committed. This guarantees that a commit will not succeed unless all transactional objects involved in the transaction have completed the processing of their transactional requests. For checks that are part of the commit process, see [“commit\(\)” on page 158](#). For more information about checked behavior, see the VisiBroker *VisiTransact Guide*.

Current methods

`begin()`

```
void begin()  
    raises SubtransactionsUnavailable;
```

This method creates a new transaction. Because nested transactions are *not* supported in VisiBroker VisiTransact, this is always a top-level transaction.

The transaction context of the client thread is modified so that the thread is associated with the new transaction. If the client thread is already associated with a transaction, the `SubtransactionsUnavailable` exception is raised.

Included in the `Current` interface in **CosTransactions.idl**

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::SubtransactionsUnavailable</code>	Because VisiBroker VisiTransact does not support nested transactions, this exception is raised if a transaction is already in progress for this client thread.

For more information, see the *VisiBroker VisiTransact Guide*.

`begin_with_name()`

```
void begin_with_name(in string user_transaction_name)  
    raises (CosTransactions::SubtransactionsUnavailable);
```

This VisiBroker VisiTransact method is a `begin()` method that enables its caller to pass a user-defined informational transaction name. For example, this helps with diagnostics because the user-defined transaction name is included in the value returned by the `get_transaction_name()` method. The name also helps with administration, because the Console will report the name in the detailed information about an outstanding transaction.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see [“Obtaining a Current object reference” on page 156](#).

Included in the `Current` interface in **VISTransactions.idl**

The following parameters are used by this method.

Parameter	Description
<code>user_transaction_name</code>	This user-defined informational transaction name can be used to trace transactions and debug programs.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::SubtransactionsUnavailable</code>	This exception is thrown if the thread already has a transaction context.

`commit()`

```
void commit(in boolean report_heuristics)
    raises (NoTransaction,
           HeuristicMixed,
           HeuristicHazard
    );
```

This method commits the transaction associated with the client thread. The effect of this method is equivalent to calling the `commit()` method on the corresponding Terminator object.

If this transaction has been marked for rollback, or any Resource votes for rollback, this call raises `CORBA::TRANSACTION_ROLLEDBACK`. If there is no current transaction, a `CosTransactions::NoTransaction` exception is raised. If the caller is not the transaction originator, `commit()` raises the exception `CORBA::NO_PERMISSION`.

Checks are made to ensure checked behavior. See the VisiBroker *VisiTransact Guide* for more information.

On return from this method, the client thread is no longer associated with a transaction. Any attempt to use `Current`, as if there were a transaction, will raise an exception, such as `NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or will return a null object reference.

This method does not return until the transaction is complete, and all related Synchronization objects have been notified.

Included in the `Current` interface in **CosTransactions.idl**

The following parameters are used by this method.

Parameter	Description
<code>in boolean report_heuristics</code>	true: Requests that the program be notified when heuristic decisions are made. false: Requests that the heuristic information is not returned to the program.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made and <code>report_heuristics</code> is true. Some relevant updates have been committed and others have been rolled back.

Exception	When thrown
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made and <code>report_heuristics</code> is true. The disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.
<code>CORBA::NO_PERMISSION</code>	Only the transaction-originator thread can call this method.
<code>CORBA::OBJECT_NOT_EXIST</code>	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction was rolled back.

For more information on the heuristic log, see the VisiBroker *VisiTransact Guide*.

`get_control()`

```
Control get_control();
```

This method returns a `Control` object reference that represents the transaction context currently associated with the client thread.

If the client thread is not associated with a transaction, a null object reference is returned.

Caution

See the VisiBroker *VisiTransact Guide* for details on checked behavior and the implications of using this method.

Included in the `Current` interface in **`CosTransactions.idl`**.

For related material, see [“Control interface” on page 171](#) and [“Terminator interface” on page 172](#). For more information see the VisiBroker *VisiTransact Guide*.

`get_otid()`

```
CosTransactions::otid_t get_otid()
    raises(CosTransactions::NoTransaction,
          CosTransactions::Unavailable);
```

Most applications will not normally call this method.

This `VISTransactions::Current` method provides the object transaction ID (`otid`) through the `Current` interface as a convenience. This avoids going to the Coordinator and looking through a `PropagationContext`. The `otid` is used to identify a transaction to a recoverable object. This method raises `CosTransactions::NoTransaction` if no transaction is associated with the client thread.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see [“Obtaining a Current object reference” on page 156](#).

Included in the Current interface in **VIStTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.
<code>CosTransactions::Unavailable</code>	This exception is thrown if the VisiTransact Transaction Service chooses to restrict the availability of the <code>PropagationContext</code> .

For related material, see [“Control interface” on page 171](#) and [“Terminator interface” on page 172](#).

get_status()

```
Status get_status();
```

This method returns an enumerated value (enum `Status`) that represents the status of the transaction associated with the client thread.

Calling this method is equivalent to calling the `get_status()` method on the corresponding Coordinator object. If there is no transaction associated with the current thread, then the method returns `CosTransactions::StatusNoTransaction`.

The possible return values are:

- `StatusActive`
- `StatusMarkedRollback`
- `StatusPrepared`
- `StatusCommitted`
- `StatusRolledBack`
- `StatusUnknown`
- `StatusNoTransaction`
- `StatusPreparing`
- `StatusCommitting`
- `StatusRollingBack`

Included in the Current interface in **CosTransactions.idl**.

No user exceptions are raised.

Status value definitions

Some implications of the enum `Status` values are:

- `StatusActive`: A transaction is associated with the target object and it is in the active state. The VisiTransact Transaction Service returns this status after a transaction has been started and prior to a Coordinator issuing any prepare statements, unless the transaction has been marked for rollback or timed out.
- `StatusMarkedRollback`: A transaction is associated with the target object and has been marked for rollback, perhaps as the result of the `rollback_only()` method.
- `StatusPrepared`: A transaction is associated with the target object and has been prepared.

- **StatusCommitted**: A transaction is associated with the target object and has been committed. It is likely that heuristics exist, otherwise the transaction would have been quickly destroyed and `StatusNoTransaction` returned.
- **StatusRolledBack**: A transaction is associated with the target object and the outcome has been determined as rollback. It is likely that heuristics exist, otherwise the transaction would have been quickly destroyed and `StatusNoTransaction` returned.
- **StatusUnknown**: A transaction is associated with the target object, but the `VisiTransact Transaction Service` cannot determine its current status. This is a transient condition, and a subsequent invocation will ultimately return a different status.
- **StatusNoTransaction**: No transaction is currently associated with the target object. This will occur after a transaction has completed.
- **StatusPreparing**: A transaction is associated with the target object and it is in the process of preparing. The `VisiTransact Transaction Service` returns this status if the transaction has started preparing, but has not yet completed the process, perhaps because it is waiting for responses to prepare from one or more `Resources`.
- **StatusCommitting**: A transaction is associated with the target object and is in the process of committing. The `VisiTransact Transaction Service` returns this status if the transaction has begun to commit, but has not yet completed the process, perhaps because it is waiting for responses from one or more `Resources`.
- **StatusRollingBack**: A transaction is associated with the target object and it is in the process of rolling back. The `VisiTransact Transaction Service` returns this status if the transaction is being rolled back, but has not yet completed the process, perhaps because it is waiting for responses from one or more `Resources`.

get_transaction_name()

```
string get_transaction_name();
```

This method returns a printable string that is a descriptive name for the transaction. This method is intended to assist in diagnostics and debugging. If the transaction was created by the `begin_with_name()` method, the returned string is the user-defined name assigned to the transaction, rather than the `VisiTransact Transaction Service`-generated name.

The effect of this method is equivalent to calling the `get_transaction_name()` method on the corresponding `Coordinator` object. If there is no transaction associated with the client thread, an empty string is returned.

Included in the `Current` interface in **CosTransactions.idl**.

No user exceptions are raised.

get_txcontext()

```
CosTransactions::PropagationContext get_txcontext()
    raises(CosTransactions::Unavailable,
          CosTransactions::NoTransaction);
```

Most applications will not normally call this method.

This `VisiTransactions::Current` method returns a `PropagationContext`, which can be used by one `VisiTransact Transaction`

Service domain to export a transaction to a new VisiTransact Transaction Service domain.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see [“Obtaining a Current object reference” on page 156](#).

Included in the `Current` interface in **VISTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Unavailable</code>	This exception is thrown if the VisiTransact Transaction Service chooses to restrict the availability of the <code>PropagationContext</code> .
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.

For related material, go to [“Coordinator interface” on page 175](#) and [“Terminator interface” on page 172](#).

ots_factory

```
attribute string ots_factory;
```

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the specified VisiTransact Transaction Service. This attribute applies to all the threads in your program. When the attribute is set, it retains its value until set again.

This attribute specifies the VisiTransact Transaction Service instance by IOR. VisiTransact uses the specified IOR (`CosTransactions::TransactionFactory`) to locate the desired instance of a VisiTransact Transaction Service instance on the network. This argument enables VisiTransact to operate without the use of a Smart Agent (**osagent**).

If you specify the IOR with either the Host Name or VisiTransact Transaction Service Name attributes, the Smart Agent will find the VisiTransact Transaction Service instance by IOR only and ignore the other attributes. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the `Current` interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: [“ots_host” on page 162](#), [“ots_name” on page 163](#)

For more information, see the VisiBroker *VisiTransact Guide*.

ots_host

```
attribute string ots_host;
```

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the

specified VisiTransact Transaction Service. This attribute applies to all the threads in your program. When the attribute is set, it retains its value until set again. To return this attribute to the default VisiTransact instance, set it to an empty or null string.

This attribute specifies the VisiTransact Transaction Service instance by host name. The Smart Agent will find any available VisiTransact Transaction Service instance that is located on the specified host.

If you specify a combination of Host Name and VisiTransact Transaction Service Name attributes, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the `Current` interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: [“ots_factory” on page 162](#) , [“ots_name” on page 163](#)

For more information, see the VisiBroker *VisiTransact Guide*.

ots_name

```
attribute string ots_name;
```

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the specified VisiTransact Transaction Service. This attribute applies to all the threads in your program. When the attribute is set, it retains its value until set again. To return this attribute to the default VisiTransact instance, set it to an empty or null string.

This attribute specifies the VisiTransact Transaction Service instance by name. The Smart Agent will find the named VisiTransact Transaction Service instance anywhere on the network.

If you specify a combination of Host Name and VisiTransact Transaction Service Name attributes, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the `Current` interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: [“ots_factory” on page 162](#) , [“ots_name” on page 163](#)

For more information, see the VisiBroker *VisiTransact Guide*.

register_resource()

```
CosTransactions::RecoveryCoordinator  
    register_resource(in CosTransactions::Resource  
        resource)  
    raises(CosTransactions::Inactive);
```

Most applications will not normally call this method.

This `VISTransactions::Current` method registers a Resource for a recoverable object. This method is a shortcut for using the Control and Coordinator objects to register a Resource for a recoverable object. It returns a Recovery Coordinator object that can be used to help coordinate recovery. If this method is invoked when there is no transaction associated with the client thread, the `CORBA::TRANSACTION_REQUIRED` exception is thrown.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see [“Obtaining a Current object reference” on page 156](#).

Included in the `Current` interface in **VISTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>in CosTransactions::Resourceresource</code>	The Resource object for the recoverable object.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Inactive</code>	The transaction has already been prepared.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been marked for rollback.

For related material, see [“Coordinator interface” on page 175](#).

register_synchronization()

```
void register_synchronization(in
    CosTransactions::Synchronization synch)
    raises(CosTransactions::NoTransaction,
          CosTransactions::Inactive,
          CosTransactions::SynchronizationUnavailable,
          CosTransactions::Unavailable);
```

This `VISTransactions::Current` method registers a Synchronization object. This method is a short-cut for using the Control and Coordinator object to register a Synchronization object. To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see [“Obtaining a Current object reference” on page 156](#).

Included in the `Current` interface in **VISTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>in CosTransactions::Synchronization synch</code>	The Synchronization object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.
<code>CosTransactions::Inactive</code>	The transaction has already been prepared.

Exception	When thrown
<code>CosTransactions::SynchronizationUnavailable</code>	This exception is not raised by <code>VisiBroker VisiTransact</code> .
<code>CosTransactions::Unavailable</code>	Raised if the <code>VisiTransact Transaction Service</code> restricts the availability of the <code>PropagationContext</code> .

For more information, see the `VisiBroker VisiTransact Guide`.

resume()

```
void resume(in Control which)
    raises(InvalidControl);
```

Associates the client thread with the specified transaction. Typically, this is used to either

- Associate a transaction context with a thread for use in implicit transaction propagation, or
- Resume a transaction that was previously suspended by a `suspend()` method.

The client thread becomes associated with the specified transaction. If the client thread was already associated with a transaction, the previous transaction context is forgotten. If `resume()` is invoked with a `NULL` control, no transaction is associated with the current thread, and the transaction context is forgotten.

Caution

Any transaction context you set via `resume()` is propagated back to the invoking object.

Included in the `Current` interface in **`CosTransactions.idl`**.

The following parameters are used by this method.

Parameter	Description
<code>in Control which</code>	A <code>Control</code> object used to set the thread's transaction context.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::InvalidControl</code>	The <code>Control</code> parameter passed to <code>resume</code> is not valid in the current execution environment.

For more information, see the `VisiBroker VisiTransact Guide`.

rollback()

```
void rollback()
    raises(NoTransaction);
```

Rolls back the transaction associated with the client thread. This is equivalent to calling the `rollback()` method on the corresponding `Terminator` object. This method does not return until the transaction is complete, and all related `Synchronization` objects have been notified. On return from this method, the client thread is no longer associated with a transaction. Any attempt to use `Current`, as if there were a transaction, will

raise an exception, such as `CosTransactions::NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or return a null object reference. If a heuristic occurs, this method will not throw a heuristic-related exception.

If the caller is not the transaction originator, `rollback()` raises the exception `CORBA::NO_PERMISSION`.

Included in the `Current` interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the current client thread.
<code>CORBA::NO_PERMISSION</code>	Only the transaction-originator thread can call this method.
<code>CORBA::OBJECT_NOT_EXIST</code>	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

For more information, see the *VisiBroker VisiTransact Guide*.

`rollback_only()`

```
void rollback_only()  
    raises (NoTransaction);
```

The method modifies the transaction associated with the client thread so that rollback is the only possible transaction outcome. The effect of this request is equivalent to calling the `rollback_only()` method on the corresponding Coordinator object. A client that is restricted from performing the `rollback()` operation, can nonetheless call `rollback_only()`.

Included in the `Current` interface in **CosTransactions.idl**.

Exceptions

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the current client thread.

For more information, see the *VisiBroker VisiTransact Guide*.

`set_timeout()`

```
void set_timeout(in unsigned long seconds);
```

This method establishes a new timeout for transactions started by subsequent calls to the `Current::begin()` method in all threads within this program.

To establish a new timeout, use these values of the `seconds` parameter:

- `= 0` Sets any subsequent transaction that is begun to the default transaction timeout for the `VisiTransact` Transaction Service instance that it uses.
- `> 0` Sets the new timeout to the specified number of seconds. If the `seconds` parameter exceeds the maximum timeout valid for a

VisiTransact Transaction Service instance being used, then the new timeout is set to that maximum, to bring it in range.

Note

When a transaction, created by a subsequent call to `begin()` in any thread in the process, takes longer to start transaction completion than the established timeout, it will be rolled back. If the timeout occurs before the transaction enters the completion stage (begins two-phase or one-phase processing) the transaction will be rolled back. Otherwise, the timeout is ignored.

Included in the `Current` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>in unsigned long seconds</code>	Numbers of seconds before timeout will occur on subsequent <code>begin()</code> operations.

No user exceptions are raised.

For more information see the description of `set_timeout()` in the VisiBroker *VisiTransact Guide*.

suspend() >

Control **suspend()** ;

This method suspends the transaction currently associated with the client thread and returns a `Control` object for that transaction. If the client thread is not associated with a transaction, a null object reference is returned.

The `Control` object can be passed to the `resume()` method to reestablish this context in the same thread or a different thread.

After the call to `suspend()`, no transaction is associated with the client thread. Any attempt to use `Current`, as if there were a transaction, will raise an exception, such as `CosTransactions::NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or return a null object reference.

Included in the `Current` interface in **CosTransactions.idl**.

No user exceptions are raised.

TransactionalObject interface

The `TransactionalObject` interface provides for the automatic propagation of transaction context on method calls of transactional objects. The `TransactionalObject` interface defines no methods.

Methods that work on transactions must have access to the transaction context.

The transaction context can be made available to such methods in two ways:

- **Explicit propagation.** A method receives and passes the transaction context as a `Terminator`, `Control`, `Coordinator`, or `PropagationContext` structure. For further information, see the VisiBroker *VisiTransact Guide*.
- **Implicit propagation.** The transaction context is passed automatically (and implicitly) on method calls. For further information, see the VisiBroker *VisiTransact Guide*.

Implicit propagation is the typical, and easiest, way. This is the capability that the `TransactionalObject` interface provides to your transactional objects.

For information about the details of what information is in the transaction context, see [“Structures” on page 152](#).

An instance of `TransactionalObject` can participate in implicit propagation. Implicit propagation is where the transaction context associated with the client thread is automatically propagated to `TransactionalObject` instances through method calls.

To use VisiTransact-managed transactions, all of your transactional objects must inherit from `TransactionalObject`. By using VisiTransact-managed transactions, you benefit from checked behavior.

The following example shows the `TransactionalObject` interface in the **CosTransactions.idl** file.

```
interface TransactionalObject
{
};
```

The transaction context is always passed implicitly to an object that inherits from `CosTransactions::TransactionalObject`. In addition, a program may be passed a transaction context explicitly, as a parameter.

TransactionFactory interface

As described in [“Current interface” on page 154](#), the `Current` interface enables a program to initiate VisiTransact-managed transactions. This section, by contrast, describes the `TransactionFactory` interface, which defines methods that enable a program to initiate non-VisiTransact-managed transactions. The `TransactionFactory` interface gives programs direct control over the propagation of transaction context.

In the `CosTransactions` module, the `TransactionFactory` interface provides three methods:

- `create()` Begins a transaction.
- `create_with_name()` Available if you are using the `VISTransactions` IDL interface (with the VisiBroker VisiTransact extensions).
- `recreate()` Creates a new representation of a transaction.

For further information about using different IDL files, see [“Choosing a Current interface” on page 154](#).

Note

You acquire a `TransactionFactory` object the way you do any CORBA object; for example, by binding.

Methods that are VisiBroker VisiTransact extensions are flagged by the icon where described or cross-referenced.

The following example shows the `CosTransactions` IDL for `TransactionFactory`.

```
...
interface TransactionFactory
{
    Control create(in unsigned long time_out);
    Control recreate(in PropagationContext ctx);
```



```
};  
...
```

The next example shows the `VIStTransactions` IDL for `TransactionFactory`.

```
...  
interface TransactionFactory :  
CosTransactions::TransactionFactory  
{  
    CosTransactions::Control  
        create_with_name(in unsigned long time_out,  
                        in string user_transaction_name);  
}; ...  
...
```

TransactionFactory methods

`create()`

```
CosTransactions::Control create(in unsigned long  
    time_out);
```

This method accepts a timeout parameter (`time_out`) and creates a new transaction. It returns a `Control` object. The `Control` object can be used to manage or to control participation in the new transaction. The `Control` object can be used by any thread and passed around explicitly, just like any other CORBA object.

Note

Checked behavior cannot be provided for transactions that use this method. Included in the `TransactionFactory` interface in **`CosTransactions.idl`**. The following parameters are used by this method.

Parameter	Description
<code>in unsigned long time_out</code>	A timeout, in seconds, that applies to this invocation only.

To establish a new timeout, use the following values of the `time_out` parameter.

- **= 0** Sets any subsequent transaction that is begun to the default transaction timeout for the `VisiTransact` Transaction Service instance that it uses.
- **> 0** Sets the new timeout to the specified number of seconds. If the `seconds` parameter exceeds the maximum timeout valid for a `VisiTransact` Transaction Service instance being used, then the new timeout is set to that maximum.

Note

If a transaction does not start transaction completion (begin two-phase or one-phase processing) before the timeout expires, it will be rolled back.

The new timeout applies only to the transaction created on this call.

See the description of `set_timeout()` in the `VisiBroker VisiTransact` Guide.

No user exceptions are raised.

`create_with_name()`

```
CosTransactions::Control  
    create_with_name(in unsigned long time_out,  
                    in string user_transaction_name);
```

This `VISTransactions` method extends the `CosTransactions::TransactionFactory::create()` method by enabling you to create a new transaction and assign it an informational transaction name that can be used for debugging and error reporting. The user-defined transaction name is included in the value returned by `get_transaction_name()`.

Note

Checked behavior cannot be provided for transactions that use this method.

This method returns a `Control` object. The `Control` object can be used to manage or to control participation in the new transaction. The `Control` object can be used by any thread and passed around explicitly, just like any other CORBA object.

Included in the `TransactionFactory` interface in **`VISTransactions.idl`**.

The following parameters are used by this method.

Parameter	Description
in unsigned long time_out	A timeout, in seconds, for this transaction.
in string user_transaction_name	This user-defined informational transaction name can be used to trace transactions and debug applications.

To establish a new timeout, use these values of the `time_out` parameter:

- **= 0** Sets any subsequent transaction that is begun to the default transaction timeout for the `VisiTransact` Transaction Service instance that it uses.
- **> 0** Sets the new timeout to the specified number of seconds. If the `seconds` parameter exceeds the maximum timeout valid for `VisiTransact` Transaction Service instance being used, then the new timeout is set to that maximum.

Note

If a transaction does not start transaction completion (begin two-phase or one-phase processing) before the timeout expires, it will be rolled back.

The new timeout applies only to the transaction created on this call.

See the description of `set_timeout()` in the *VisiBroker `VisiTransact` Guide*.

No user exceptions are raised.

For more information, see the *VisiBroker `VisiTransact` Guide*.

`recreate()`

```
Control recreate(in PropagationContext context);
```

Most applications will not normally call this method.

This method creates a new `Control` object using its `PropagationContext` parameter. The `Control` object can be used to manage or to control participation in the transaction.

To get a transaction's `PropagationContext`, invoke the `get_txcontext()` method on the transaction's Coordinator object.

Included in the `TransactionFactory` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>in PropagationContext context</code>	Context of the transaction to import.

No user exceptions are raised.

The following example shows the way `get_txcontext()` and `recreate()` work together to recreate a transaction.

```
...
CosTransactions::Coordinator_var coord;
CosTransactions::TransactionFactory_var newDomainFactory;
...
propctxt = coord->get_txcontext();
CosTransactions::Control_var control = newDomainFactory-
>recreate(propctxt);
...
```

Control interface

The `Control` interface enables a program to explicitly manage or propagate a transaction context. A `Control` object is implicitly associated with one specific transaction.

The `Control` interface defines two methods:

- `get_coordinator()`
- `get_terminator()`

The `get_coordinator()` method returns a `Coordinator` object, which supports methods used by participants in the transaction. The `get_terminator()` method returns a `Terminator` object, which supports methods to complete the transaction. The `Terminator` and `Coordinator` objects support methods that are typically performed by different parties. Providing two objects enables each set of methods to be made available only to the parties that require those methods.

The example below contains the IDL for the `Control` interface, an excerpt from the **CosTransactions.idl** file.

```
...
interface Control
{
    Terminator get_terminator()
        raises(Unavailable);
    Coordinator get_coordinator()
        raises(Unavailable);
};
...
```

You can obtain a `Control` object by using one of the methods of the `TransactionFactory`. See [“TransactionFactory interface” on page 168](#). You can also obtain a `Control` object for the current transaction (associated with a thread) through methods of the `Current` object.

`get_coordinator()`

```
Coordinator get_coordinator()
    raises(Unavailable);
```

This method returns a Coordinator object. The Coordinator provides methods that are called by participants in a transaction. These participants are typically either recoverable objects or agents of recoverable objects.

Included in the `Control` interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Unavailable</code>	The Control object cannot provide the requested Coordinator object.

For more information, see [“Coordinator interface” on page 175](#) for details on methods you can use once you obtain the Coordinator object.

`get_terminator()`

```
Terminator get_terminator()
    raises(Unavailable);
```

This method returns a Terminator object. The Terminator can be used to rollback or commit the transaction associated with the Control. The `Unavailable` exception is raised if the Control cannot provide the requested object due to the inability of the Terminator object to be transmitted to or be used in other execution environments.

Included in the `Control` interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Unavailable</code>	The Control object cannot provide the requested Terminator object.

For more information, see the *VisiBroker VisiTransact Guide*.

Terminator interface

The Terminator interface supports methods to commit or rollback a transaction. Typically, these methods are used by the transaction originator, but any program that has access to a Terminator object for that transaction can commit or rollback the transaction.

The following example contains the IDL for the Terminator interface, an excerpt from the **CosTransactions.idl** file.

```
...
interface Terminator
{
    void commit(in boolean report_heuristics)
        raises (HeuristicMixed,
              HeuristicHazard);
    void rollback();
};
...
```

Terminator methods

`commit()`

```
void commit(in boolean report_heuristics)
    raises (HeuristicMixed,
           HeuristicHazard);
```

Before committing the transaction, this method performs some checks. If the transaction has not been marked rollback only, and all of the participants in the transaction agree to commit, the transaction is committed and the operation terminates normally. Otherwise, the transaction is rolled back and the `CORBA::TRANSACTION_ROLLEDBACK` standard exception is raised.

If the `report_heuristics` parameter is true, the VisiTransact Transaction Service will report inconsistent or possibly inconsistent outcomes using the `CosTransactions::HeuristicMixed` and `CosTransactions::HeuristicHazard` exceptions when appropriate. Information about the Resources involved in a heuristic outcome will be written to a heuristic log file corresponding to the instance of the VisiTransact Transaction Service. For more information on heuristics, see the VisiBroker *VisiTransact Guide*.

When a transaction is committed, all changes to recoverable objects made in the scope of this transaction are made permanent and visible to other transactions or clients.

Included in the Terminator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>report_heuristics</code>	true: Requests that the <code>HeuristicMixed</code> or <code>HeuristicHazard</code> exceptions be raised, when appropriate. false: Requests that the heuristic information is not returned to the program.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made. Some relevant updates have been committed, and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been marked for rollback.
<code>CORBA::OBJECT_NOT_EXIST</code>	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

The example below shows how to use the `commit()` method with and without heuristics.

```
// Using commit() without heuristics.
try
{
    terminator->commit(0);
}
catch(CORBA::TRANSACTION_ROLLEDBACK&)
{
    cerr << "Transaction failed" << endl;
}
...
// Using commit() with heuristics.
try
{
    terminator->commit(1);
}
catch(CORBA::TRANSACTION_ROLLEDBACK&)
{
    cerr << "Transaction failed" << endl;
}
catch(CosTransactions::HeuristicMixed&)
{
    cerr << "HeuristicMixed exception was raised" << endl;
}
catch(CosTransactions::HeuristicHazard&)
{
    cerr << "HeuristicHazard exception was raised" << endl;
}
catch(CORBA::OBJECT_NOT_EXIST&)
{
    cerr << "Transaction no longer exists" << endl;
}
}
```

For more information, see the VisiBroker *VisiTransact Guide*.

rollback()

```
void rollback();
```

This method rolls back the transaction. When a transaction is rolled back, all changes to recoverable objects made in the scope of this transaction are rolled back. All Resources locked by the transaction are made available to other transactions as appropriate to the degree of isolation enforced by the Resources.

This method does not return until the transaction is complete and all related Synchronization objects have been notified. Any heuristic outcome that may occur will be provided through the Console.

Included in the Terminator interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CORBA::NO_PERMISSION	Only the transaction-originator thread can call this method.
CORBA::OBJECT_NOT_EXIST	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

For more information, see the VisiBroker *VisiTransact Guide*.

Coordinator interface

The Coordinator interface provides methods that are used by participants in a transaction. These participants are typically either recoverable objects or agents of recoverable objects. Each Coordinator is implicitly associated with a single transaction.

The following example shows the CosTransactions IDL for the Coordinator interface.

```
...
interface Coordinator
{
    Status get_status();
    Status get_parent_status();
    Status get_top_level_status();

    boolean is_same_transaction(in Coordinator coord);
    boolean is_related_transaction(in Coordinator coord);
    boolean is_ancestor_transaction(in Coordinator coord);
    boolean is_descendant_transaction(in Coordinator coord);
    boolean is_top_level_transaction();

    unsigned long hash_transaction();
    unsigned long hash_top_level_tran();

    RecoveryCoordinator register_resource(in Resource
resource)
        raises(Inactive);

    void register_synchronization(in Synchronization synch)
        raises(Inactive, SynchronizationUnavailable);

    void register_subtran_aware(in
SubtransactionAwareResource resource)
        raises(Inactive, NotSubtransaction);

    void rollback_only()
        raises(Inactive);

    string get_transaction_name();

    Control create_subtransaction()
        raises(SubtransactionsUnavailable, Inactive);

    PropagationContext get_txcontext()
        raises(Unavailable);
};
```

Because VisiTransact does not support nested transactions, several of the Coordinator methods have become equivalent--that is, they return the same result. More information is provided later in the section with the method descriptions.

The following methods are equivalent:

- `get_status()`
- `get_top_level_status()`

- `get_parent_status()`

Similarly, certain methods return true only when the target object and the parameter refer to the same Coordinator object. Therefore, the following methods are also equivalent:

- `is_same_transaction()`
- `is_related_transaction()`
- `is_ancestor_transaction()`
- `is_descendant_transaction()`

And, the following methods are equivalent:

- `hash_transaction()`
- `hash_top_level_tran()`

Finally, without nested transactions, the `create_subtransaction()` method is not useful and is therefore excluded from this version of VisiTransact (and this documentation), although it is described in the OMG specification.

Coordinator methods

`get_parent_status()`

```
Status get_parent_status();
```

Because VisiTransact does not support nested transactions, every transaction is top-level, and `get_parent_status()` of a top-level transaction is equivalent to `get_status()`, by OMG definition. For further information, see [“recreate\(\)” on page 170](#).

Included in the Coordinator interface in **CosTransactions.idl**.

`get_status()`

```
Status get_status();
```

This method returns the status of the transaction associated with the target object, as an enumerated value (enum `Status`). If there is no transaction associated with the target object, then the method returns the value `StatusNoTransaction`.

The following are the possible return values, as defined in **CosTransactions.idl**:

- `StatusActive`
- `StatusMarkedRollback`
- `StatusPrepared`
- `StatusCommitted`
- `StatusRolledBack`
- `StatusUnknown`
- `StatusNoTransaction`
- `StatusPreparing`
- `StatusCommitting`
- `StatusRollingBack`

For information about each Status value, see [“Status value definitions” on page 160](#).

Included in the `Coordinator` interface in **CosTransactions.idl**.

For more information, see the *VisiBroker VisiTransact Guide*.

get_top_level_status()

```
Status get_top_level_status();
```

Because VisiTransact does not support nested transactions, every transaction is top-level. Therefore, this method is equivalent to the `get_status()` method.

Included in the `Coordinator` interface in **CosTransactions.idl**.

get_transaction_name()

```
string get_transaction_name();
```

This method returns a printable string that is a descriptive name for the transaction. This method is intended to assist with diagnostics and debugging. If the transaction was created by the `VISTransactions::TransactionFactory::create_with_name()` method, the return string is the user-defined descriptive transaction name rather than the VisiTransact Transaction Service-generated name. If there is no transaction associated with the client thread, an empty string is returned.

Included in the `Coordinator` interface in **CosTransactions.idl**.

For more information, see the *VisiBroker VisiTransact Guide*.

get_txcontext()

```
PropagationContext get_txcontext()  
    raises(Unavailable);
```

Most applications will not normally call this method.

The `get_txcontext()` method returns a `PropagationContext`, which can be used by one VisiTransact Transaction Service domain to export a transaction to a new VisiTransact Transaction Service domain.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Unavailable</code>	The VisiTransact Transaction Service restricts the availability of the <code>PropagationContext</code> .

hash_top_level_tran()

```
unsigned long hash_top_level_tran();
```

Most applications will not normally call this method.

Because VisiTransact does not support nested transactions, every transaction is a top-level transaction. Therefore, this method is equivalent to the `hash_transaction()` method.

This method returns a hash code for the transaction associated with the target object. Each transaction has a single hash code. The hash code can be used to efficiently compare Coordinators for inequality against the hash codes of other transactions. If the hash codes of two Coordinators are not equal, then they represent different transactions. If two hash codes are equal, then `Coordinator::is_same_transaction()` must be used to guarantee equality or inequality, because two Coordinators might have the same hash code but, in fact, represent two different transactions.

Included in the `Coordinator` interface in **CosTransactions.idl**.

For more information, see the *VisiBroker VisiTransact Guide*.

hash_transaction()

```
unsigned long hash_transaction();
```

Most applications will not normally call this method.

This method returns a hash code for the transaction associated with the target object. Each transaction has a single hash code. The hash code can be used to efficiently compare Coordinators for inequality against the hash codes of other transactions. If the hash codes of two Coordinators are not equal, then they represent different transactions. If two hash codes are equal, then `Coordinator::is_same_transaction()` must be used to guarantee equality or inequality, because two Coordinators might have the same hash code but, in fact, represent two different transactions.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The example below shows a method that uses `hash_transaction()` to efficiently reject unequal Coordinators.

```
CORBA::Boolean are_same(Coord1, Coord2)
{
    CORBA::ULong hash1 = Coord1->hash_transaction();
    CORBA::ULong hash2 = Coord2->hash_transaction();
    if(hash1 != hash2)
    {
        return 0;
    }
    else
    {
        return Coord1->is_same_transaction(Coord2);
    }
}
```

For more information, see the *VisiBroker VisiTransact Guide*.

is_ancestor_transaction()

```
boolean is_ancestor_transaction(in Coordinator coord);
```

Because `VisiTransact` does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>coord</code>	The Coordinator with which the target Coordinator is compared.

is_descendant_transaction()

```
boolean is_descendant_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

is_related_transaction()

```
boolean is_related_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

is_same_transaction()

```
boolean is_same_transaction(in Coordinator coord);
```

This method returns true if, and only if, the target object and the parameter object both refer to the same transaction.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

For more information, see the VisiBroker *VisiTransact Guide*.

is_top_level_transaction()

```
boolean is_top_level_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method always returns true.

Included in the `Coordinator` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

For more information, see the VisiBroker *VisiTransact Guide*.

register_resource()

```
RecoveryCoordinator register_resource(in Resource  
    resource)  
    raises(Inactive);
```

This method registers the specified Resource as a participant in the transaction associated with the target object. When the transaction is terminated, the Resource will receive requests to prepare, commit, or rollback the updates performed as part of the transaction. For information on Resource methods, see [“Resource interface” on page 183](#).

This method returns a RecoveryCoordinator that can be used by this Resource during recovery.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.
CORBA::TRANSACTION_ROLLEDBACK	This exception is thrown if the transaction has been marked for rollback.

register_synchronization()

```
void register_synchronization(in Synchronization synch)  
    raises(Inactive, SynchronizationUnavailable);
```

This method registers the specified Synchronization object so that it will be notified to perform the necessary processing before and after completion of the transaction. Such methods are described in the description of the Synchronization interface; see [“Synchronization interface” on page 186](#).

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
synch	The Synchronization object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.

Exception	When thrown
CosTransactions::SynchronizationUnavailable	This exception is never raised.
CORBA::TRANSACTION_ROLLEDBACK	This exception is thrown if the transaction has been marked for rollback.

For more information, see [“Resource interface” on page 183](#), and [“Synchronization interface” on page 186](#) and see the *VisiBroker VisiTransact Guide*.

register_subtran_aware()

```
void register_subtran_aware(in
    SubtransactionAwareResource resource)
    raises(Inactive, SubtransactionsUnavailable);
```

Because VisiTransact does not support nested transactions, this method always raises `CosTransactions::SubtransactionsUnavailable`.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource to be registered with the subtransaction.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is never thrown.
CosTransactions::SubtransactionsUnavailable	This exception is thrown whenever this method is invoked.

rollback_only()

```
void rollback_only()
    raises (Inactive);
```

This method modifies the transaction associated with the Coordinator so that rollback is the only possible transaction outcome.

Included in the Coordinator interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.

For more information about invoking `rollback_only()`, see the *VisiBroker VisiTransact Guide*.

RecoveryCoordinator interface

When a Resource is registered with the Coordinator, a RecoveryCoordinator is returned. The RecoveryCoordinator is implicitly associated with a single Resource registration request and can only be used by that Resource. In case recovery is necessary, the Resource can use the RecoveryCoordinator during the recovery process.

Also, the Resource can use the RecoveryCoordinator if it needs to know the current status of the transaction. For example, the Resource can set its own timeout, and if commit or rollback does not occur within the timeout, the Resource can invoke `replay_completion()` to determine the status of the transaction.

The following example shows the RecoveryCoordinator interface in the **CosTransactions.idl** file.

```
...
interface RecoveryCoordinator
{
    Status replay_completion(in Resource resource)
        raises (NotPrepared);
};
...
```

RecoveryCoordinator methods

`replay_completion()`

```
Status replay_completion(Resource resource)
    raises (NotPrepared);
```

This method notifies the VisiTransact Transaction Service that the Resource is available. This method is typically used during recovery, and can be used by the Resource to determine the status of the transaction.

Note

This method does not initiate completion.

Included in the RecoveryCoordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource for which the recovery is being undertaken.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::NotPrepared	This exception is thrown if <code>replay_completion()</code> is called for a Resource that has not yet been prepared.

For more information on Status values, see [“Status value definitions” on page 160](#) in [“Current interface”](#).

Resource interface

VisiBroker VisiTransact uses a two-phase commit protocol to complete a top-level transaction with each Resource registered with it--that is, with each Resource that might change during the transaction. The Resource interface defines the methods invoked by the VisiTransact Transaction Service on each Resource. Each object supporting the Resource interface is implicitly associated with a single top-level transaction.

The following example shows the Resource interface in the **CosTransactions.idl** file.

```
...
interface Resource
{
    Vote prepare()
        raises(
            HeuristicMixed,
            HeuristicHazard
        );
    void rollback()
        raises(
            HeuristicCommit,
            HeuristicMixed,
            HeuristicHazard
        );
    void commit()
        raises(
            NotPrepared,
            HeuristicRollback,
            HeuristicMixed,
            HeuristicHazard
        );
    void commit_one_phase()
        raises(
            HeuristicHazard
        );
    void forget();
};
...
```

VisiBroker VisiTransact provides this interface, but you must provide the implementation in your Resource. A typical application does not implement a Resource.

Resource methods

commit()

```
void commit()
    raises(NotPrepared
           HeuristicRollback
           HeuristicMixed
           HeuristicHazard
    );
```

This method attempts to commit all changes associated with the Resource. If a heuristic outcome exception is raised, the Resource must keep the heuristic decision in persistent storage until the `forget()` method is

performed so that it can return the same outcome in case `commit()` is invoked again during recovery. Otherwise, the Resource can immediately forget all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions may be thrown when calling this method.

Exception	When thrown
<code>CosTransactions::NotPrepared</code>	The <code>commit()</code> method was called before the <code>prepare()</code> method was called.
<code>CosTransactions::HeuristicRollback</code>	A heuristic decision was made and all relevant updates have been rolled back.
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made. Some relevant updates have been committed and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.

For more information, see the VisiBroker *VisiTransact Guide*.

commit_one_phase()

```
void commit_one_phase()
    raises (HeuristicHazard);
```

The `commit_one_phase()` method requests the Resource to commit all changes made as part of the transaction. This method is an optimization for use when a transaction has only one participating Resource. The `commit_one_phase()` method can be called on the Resource, instead of first calling `prepare()` and then `commit()` or `rollback()`.

If a heuristic outcome exception is raised, the Resource must keep the heuristic decision in persistent storage until the `forget()` method is performed. This enables the Resource to return the same outcome in case `commit_one_phase()` is performed again during recovery. Otherwise, the Resource immediately forgets all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

If a failure occurs during `commit_one_phase()`, it is called again when the failure is repaired. Since there is only a single Resource, the `HeuristicHazard` exception is used to report heuristic decisions related to that Resource.

The following exceptions may be thrown when calling this method.

Exception	When thrown
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The <code>commit_one_phase()</code> method cannot commit all changes made as part of the transaction.

For more information, see the VisiBroker *VisiTransact Guide*.

forget ()

```
void forget ();
```

When VisiBroker VisiTransact receives a heuristic exception, it records the exception. The VisiTransact Transaction Service will ultimately call `forget ()` on the Resource. This means that the Resource can discard all information about the transaction that raised the heuristic exception. This method is called only if a heuristic exception was raised from `rollback ()`, `commit ()`, or `commit_one_phase ()`.

Included in the Resource interface in **CosTransactions.idl**.

For more information, see the VisiBroker *VisiTransact Guide*.

prepare ()

```
Vote prepare ()  
    raises (HeuristicMixed  
           HeuristicHazard  
           );
```

This method performs the prepare operation--the first step in the two-phase commit protocol for a Resource object. When finished, the method returns one of these Vote values.

- **VoteReadOnly**--No persistent data associated with the Resource has been modified by the transaction.
- **VoteCommit**--The following data has been saved to persistent storage:
 - a** All data changed as part of the transaction
 - b** A reference to the RecoveryCoordinator object
 - c** An indication that the Resource has been prepared
- **VoteRollback**--Some circumstance has caused the Resource to call for a rollback, such as inability to save the relevant data, inconsistent outcomes, or no knowledge of the transaction (which might happen after a crash).

After returning **VoteReadOnly** or **VoteRollback**, the Resource can forget all knowledge of the transaction.

If a heuristic outcome exception is raised, the Resource must save the heuristic decision in persistent storage until the `forget ()` method is called so that it can return the same outcome in case `prepare ()` is called again.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions may be thrown when calling this method.

Exception	When thrown
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision has been made. Some relevant updates have been committed and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.

For more information, see the *VisiBroker VisiTransact Guide*.

rollback()

```
void rollback()  
    raises (HeuristicCommit  
           HeuristicMixed  
           HeuristicHazard  
    );
```

This method rolls back all updates associated with the Resource object.

If a heuristic outcome exception is raised, the Resource must save the heuristic decision in persistent storage until the `forget()` method is invoked. This enables the Resource to return the same outcome in case `rollback()` is called again during recovery. Otherwise, the Resource immediately forgets all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions that may be raised when calling this method.

Exception	When thrown
CosTransactions::HeuristicCommit	A heuristic decision was made and all relevant updates have been committed.
CosTransactions::HeuristicMixed	A heuristic decision was made and some relevant updates have been committed, and others have been rolled back.
CosTransactions::HeuristicHazard	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the HeuristicMixed exception is raised.

For more information, see the *VisiBroker VisiTransact Guide*.

Synchronization interface

The Synchronization interface defines methods that enable a transactional object to be notified before the start of the two and one-phase commit protocol, and after its completion, as described in the *VisiBroker VisiTransact Guide*.

In the CosTransactions module, the Synchronization interface provides two methods:

- `before_completion()`--Ensures that `before_completion()` is invoked before starting to commit a transaction.
- `after_completion()`--Ensures a transactional object is notified after the transaction has been completed. This applies to all transactions whether they were committed or rolled back.

Here are two limitations you should be aware of:

- If the VisiTransact Transaction Service cannot contact your Synchronization object while trying to call `before_completion()`, then the transaction will be rolled back. If a Synchronization object is unavailable after completion, it will be ignored.
- When the VisiTransact Transaction Service instance recovers from a failure, it does not remember Synchronization objects, and will only

replay completion and not Synchronization objects. If a failure occurs, the Synchronization object will not be notified of how the transaction was completed by the VisiTransact Transaction Service.

Note

In certain cases, `after_completion()` is called when `before_completion()` was not called. `before_completion()` is called only if a transaction is still continuing towards a commit at the outset of completion. `after_completion()` is always called (unless the VisiTransact Transaction Service crashes before the transaction completes).

Synchronization objects are not recoverable. If an instance of a VisiTransact Transaction Service fails, any transactions that are completed will not involve Synchronization objects.

Note

Although the signatures of these methods are fixed by the Synchronization interface, their implementations are user-defined. This enables an application to do custom processing at key points in a transaction--before and after transaction completion.

The following example shows the CosTransactions IDL for the Synchronization interface.

```
...
interface Synchronization : TransactionalObject
{
    void before_completion();
    void after_completion(in Status status);
};
...
```

Synchronization methods

`after_completion()`

```
void after_completion(in Status status);
```

This is a method that you write that performs customized processing after the completion of the transaction. It is essentially a callback.

Note

The `after_completion()` method is always invoked during normal processing.

As shown above, IDL for the Synchronization interface inherits from the TransactionalObject interface. As a programmer, you are responsible for writing the implementation of an `after_completion()` method that conforms to the IDL.

If `after_completion()` is to be called in processing a particular transaction, the following actions must be taken:

- A Synchronization object must be created, by the transaction originator or some other transaction participant.
- The Synchronization object must be registered by getting the transaction's Coordinator, and calling the `register_synchronization()` method in Coordinator and Current. See [“register_synchronization\(\)” on page 164](#) in [“Coordinator interface” on page 175](#).

Registration must be done after the transaction is created and before the start of the two-phase commit.

Multiple Synchronization objects can be created and registered for a single transaction.

The VisiTransact Transaction Service calls this method after the two-phase commit protocol completes. As an example of its use, `after_completion()` can be used by a transactional object to discover the outcome of the transaction. This is particularly useful for transactional objects that are not also recoverable objects, and so are not automatically notified of the outcome.

You can call `get_status()` to see whether or not the transaction has been marked for rollback.

Notice that because Synchronization inherits from `TransactionalObject`, the transaction context will be available through the `Current` object.

Included in the Synchronization interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>status</code>	A Status value passed by the Terminator to the Synchronization object once the outcome of the transaction has been determined.

All exceptions will be ignored.

For more information see the VisiBroker *VisiTransact Guide*.

before_completion()

```
void before_completion();
```

This is a method that you write to perform customized processing at the onset of the completion of a transaction. It is called only if the transaction is still continuing towards successful completion. It is essentially a callback.

Note

The `before_completion()` method is invoked after the application invokes `commit()`, but before the VisiTransact Transaction Service begins transaction completion. The `before_completion()` method is not invoked for a rollback request.

As shown in the beginning of this section the IDL for the Synchronization interface inherits from the `TransactionalObject` interface. As a programmer, you are responsible for writing the implementation of a `before_completion()` method that conforms to the IDL.

If `before_completion()` is to be called when processing a particular transaction, the Synchronization object must be registered using the `register_synchronization()` method in the `Coordinator` interface. Register the Synchronization object from your transactional object or recoverable server. Registration must be done after the transaction is created and before the start of the two-phase commit.

Multiple Synchronization objects can be created and registered for a single transaction.

The VisiTransact Transaction Service calls this method after the transaction work has been done but before the two-phase commit protocol starts; that is, `before_prepare()` is called on the participating Resource. VisiBroker

VisiTransact calls `before_completion()` only if a transaction is still continuing towards a commit at the outset of completion. This means that `Terminator->commit()` was called and the transaction has not been marked for rollback. If `Terminator->rollback()` was called, or the first of several Synchronization objects marked the transaction for rollback, or the transaction was already marked for rollback, `before_completion()` calls will not be called again for this transaction.

Within this method, you can ensure the transaction will be rolled back by calling the `rollback_only()` method. You can also call `get_status()` to see whether or not the transaction has been marked for rollback. At the time the method is called, however, you cannot rely upon the status to indicate whether or not the transaction will actually be committed.

Notice that because the Synchronization interface inherits from `TransactionalObject`, the transaction context will be available through the Current object. This means that `before_completion()` can use all objects on the Current object, such as `get_status()` and `get_control()`.

Included in the Synchronization interface in **CosTransactions.idl**.

All CORBA exceptions raised by your Synchronization objects will result in the transaction being rolled back.

For more information see the *VisiBroker VisiTransact Guide*.

VISTransactionService class

The `VISTransactionService` class is provided to help you link an instance of the VisiTransact Transaction Service with your application process.

Its methods, in the **visits.h** file, include:

- `init()`
- `terminate()`

The following section documents these methods.

VISTransactionService methods

init()

```
static void init(int &argc, char* const* argv);
```

This method initializes all the instances of the VisiTransact Transaction Service that are linked in your application process. It must be invoked to activate an instance of the VisiTransact Transaction Service that you have linked into your process by adding the **ots_r** library and the **otsinit** object file to the link line.

If you want to initialize the embedded instance of the VisiTransact Transaction Service, the `init()` method must be called. After `ORB_init()` has been invoked, all the recognized VisiTransact arguments will be stripped from the original parameter list so that they will not interfere with any other argument processing that your client program requires.

Caution

If the in-process VisiTransact Transaction Service instance has been deactivated using `terminate()`, **vshutdown**, or the Console, do not invoke `init()` again.

Included in the `VISTransactionService` interface in **visits.h**.

The following parameters are used by this method.

Parameter	Description
<code>argc</code>	The number of arguments being passed to the <code>init()</code> method.
<code>argv</code>	The actual arguments being passed to the <code>init()</code> method.

Note

The `argc` and `argv` parameters should be `argc` and `argv` from the main function.

`terminate()`

```
static void terminate();
```

This method will cleanup all the instances of the VisiTransact Transaction Service that have been initialized by a call to `init()`. This method will not bring down your application process unless the command line option `OTSexit_on_shutdown` is set to 1.

If this option is either not set, or set to 0, it will deactivate the VisiTransact Transaction Service objects registered with the Smart Agent but will NOT bring down your application process.

Included in the `VISTransactionService` interface in **visits.h**.

For more information, see the *VisiBroker VisiTransact Guide*.

Commands and arguments

This section provides information about arguments for VisiTransact Transaction Manager commands and `ORB_init()`.

Overview of VisiTransact commands

The commands in the next few sections relate to one another as described in the following table.

VisiTransact Transaction Manager component	Related commands
VisiBroker Console	“vbconsolew” on page 190 . This command starts the VisiBroker Console.
VisiTransact Transaction Service	“ots” on page 191 . This command starts an instance of the VisiTransact Transaction Service. “vshutdown” on page 191 . This command shuts down an instance of the VisiTransact Transaction Service.

vbconsolew

This command invokes the VisiBroker Console, and can be run on any node that has the executable for the Console installed. The Console does not have to be local to the VisiTransact Transaction Service instances that it administers. However, to administer these instances, they must be running when the Console is started.

Syntax

```
prompt>vbconsolew
```

Arguments

None.

ots

This command starts an instance of the VisiTransact Transaction Service.

Syntax

```
prompt>ots [-Dvbroker.ots.defaultTimeout=<seconds>]
           [-Dvbroker.ots.defaultMaxTimeout=<seconds>]
           [-Dvbroker.ots.name=<transaction_service_name>]
           [-Dvbroker.ots.logDir=<directory_name>]
           [-Dvbroker.ots.iorFile=<ior_file_name>]
```

Example

```
prompt>ots -Dvbroker.ots.defaultTimeout=60
          -Dvbroker.ots.defaultMaxTimeout=120
          -Dvbroker.ots.name=Sales
```

Arguments

The following arguments can be used with this command.

Argument	Description
-Dvbroker.ots.defaultTimeout=<seconds>	Sets the default transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 600 seconds.
-Dvbroker.ots.defaultMaxTimeout=<seconds>	Sets the maximum allowed transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 3600 seconds.
-Dvbroker.ots.name=<transaction_service_name>	Sets the name of the VisiTransact Transaction Service instance used when registering its interface with the Smart Agent. The default is <host_name>_ots .
-Dvbroker.ots.logDir=<directory_name>	Names the directory in which logs and logger information are kept. If you do not specify, the default is <VBROKER_ADM>\its\<<transaction_service_name>\logger.
-Dvbroker.ots.iorFile=<ior_file_name>	Takes in a file name whereby the IOR of the transaction service will be written into. If this option is not given or filename given by this option is not accessible, the IOR of the transaction service will be written to STDOUT.

vshutdown

This command can be used to shutdown the VisiTransact Transaction Service and the VisiTransact XA Resource Director.

If it is used to shutdown an instance of the VisiTransact Transaction Service, it defaults to allow the VisiTransact Transaction Service to wait for outstanding transactions to complete before shutting down, but will not accept any new transactions. You can direct the instance of the VisiTransact Transaction Service to shutdown without resolving transactions by using the optional `-immediate` argument.

Note

You can use this command to shutdown an instance of the VisiTransact Transaction Service that is embedded within an application process provided the `-Dvbroker.ots.exitOnShutdown` argument was passed to the application's `ORB_init()` method. For information about shutting down an instance of the VisiTransact Transaction Service that is embedded in an application process, see [“Arguments for applications with an embedded VisiTransact Transaction Service instance” on page 194](#).

Syntax

```
prompt>vshutdown -help
prompt>vshutdown -type <object_type>
    [-name <object_name>]
    [-host <host_name>]
    [-immediate]
    [-noprompt]
```

Example

```
prompt>vshutdown -type ots -name myTxnSvc
```

Arguments

The following arguments can be used with this command.

Argument	Description
-help	Use this argument to display the usage information for this command. If you use this argument, vshutdown ignores all other arguments and just gives you usage information.
-type	Valid types are: ots--VisiTransact Transaction Service rd--VisiTransact XA Resource Director If you specify only the type, vshutdown lists all the services of that particular type and prompts you whether to shut them down or not.
-name <object_name>	The name of the object to be shutdown. By default vshutdown looks up all the objects of the specified type and prompts you whether to shut them down or not.
-host <host_name>	The host machine where the service resides that you wish to shutdown. By default vshutdown locates all the objects of a particular type and name (if mentioned) on the network and prompts you whether to shut them down or not.
-immediate	Use this argument to direct the instance of the VisiTransact Transaction Service to shutdown immediately without resolving any outstanding transactions.
-noprompt	Use this argument if you do not want to be prompted for confirmation when you get a list of all object types, names, or hosts to be shut down.

Command-line arguments for applications

You can pass arguments to `ORB_init()` (or `ORB.init()` for Java applications) which affect the VisiTransact Transaction Service and your application components. The following sections explain these options.

Passing command-line arguments to `ORB_init()` using `argv` and `argc`

As a component of VisiBroker, command line arguments are passed to VisiTransact Transaction Manager components through the VisiBroker ORB initialization call `ORB_init()`. Therefore, in order for arguments specified on the command line to have effect on the VisiTransact operation in a given application process, applications must pass the original `argc` and `argv` arguments to `ORB_init()` from the main program. For example:

```
int main(int argc, char * const* argv)
{
    try
    {
        // initialize the ORB
        CORBA::ORB_var orb = CORBA::ORB_init(argc, argv);
```



```

    }
    ...
}

```

The `ORB_init()` function will parse both ORB arguments and VisiTransact Transaction Manager arguments, removing them from the `argv` vector before returning.

For Java, the command-line arguments are passed to `org.omg.CORBA.ORB.init()`. For example,

```

public static void main(String[] args) throws Exception
{
    org.omg.CORBA.ORB orb = org.omg.CORBA.ORB.init(args,
    null);
    ...
}

```

Arguments for applications that originate transactions

By default, the first time you start a transaction with `Current::begin()`, an instance of the VisiTransact Transaction Service is found using the Smart Agent. You can specify an instance of the VisiTransact Transaction Service to use, and the timeout value for transactions, by using the arguments described in this section.

You pass these arguments at the command line when starting your transactional server manually. Your application handles these command-line input arguments using the `ORB_init()` method as described in [“Passing command-line arguments to ORB_init\(\) using argc and argv” on page 192](#).

The following table explains the arguments that can be passed to `ORB_init()` from the command line for applications that originate transactions.

Argument to ORB_init()	Description
<code>-Dvbroker.ots.currentFactory</code>	VisiTransact Transaction Manager uses the specified IOR for the requested Transaction Service (<code>CosTransactions::TransactionFactory</code>) to locate the desired instance of the VisiTransact Transaction Service on the network. This argument enables VisiTransact Transaction Manager to operate without the use of a Smart Agent (osagent).
<code>-Dvbroker.ots.currentHost</code>	The Smart Agent will find any available VisiTransact Transaction Service instance that is located on the specified host.
<code>-Dvbroker.ots.currentName</code>	The Smart Agent will find the named VisiTransact Transaction Service instance anywhere on the network.
<code>-Dvbroker.ots.currentTimeout</code>	Sets the transaction timeout value for <code>Current</code> . If the transaction is still alive after the timeout expires, the transaction is automatically rolled back.

For example, to start the **billing** C++ transactional server that uses the **Accounting** VisiTransact Transaction Service, you would use the following command:

```
prompt>billing -Dvbroker.ots.currentName=Accounting
```

To start the **Billing** Java transactional server that uses the **Accounting** VisiTransact Transaction Service, and has a timeout period of 2400 seconds, you would use this command:

```

prompt>vbj -Dvbroker.orb.dynamicLibs=
    com.visigenic.services.CosTransactions.TSServiceLoader
-Dvbroker.ots.currentName=Accounting
-Dvbroker.ots.currentTimeout=2400 Billing

```

Note

To execute Java transactional objects, you must use the `vbj` command to invoke the virtual machine. The options beginning `-Dvbroker.orb.dynamicLibs` are required to use ORB services. Be sure to use the correct capitalization of this option.

If you specify a combination of `-Dvbroker.ots.currentHost` and `-Dvbroker.ots.currentName`, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you specify `-Dvbroker.ots.currentFactory` with either `-Dvbroker.ots.currentHost` or `-Dvbroker.ots.currentName`, the Smart Agent will find the VisiTransact Transaction Service instance by IOR only. It ignores the other arguments.

Arguments for applications with an embedded VisiTransact Transaction Service instance

You can specify an instance of the VisiTransact Transaction Service to use with the arguments described in this section. You can also specify whether your application process will be brought down when the embedded instance of the VisiTransact Transaction Service terminates.

You pass these arguments at the command line when starting your transactional server manually. Your application handles these command-line input arguments using the `ORB_init()` method as described in [“Passing command-line arguments to ORB_init\(\) using argc and argv” on page 192](#).

The following table explains the arguments that can be passed to `ORB_init()` from the command line for applications that embed an instance of the VisiTransact Transaction Service.

Argument to ORB_init()	Description
<code>-Dvbroker.ots.defaultTimeout=<seconds></code>	Sets the default transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 600 seconds.
<code>-Dvbroker.ots.defaultMaxTimeout=<seconds></code>	Sets the maximum allowed transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 3600 seconds.
<code>-Dvbroker.ots.name=<transaction_service_name></code>	Sets the name of the VisiTransact Transaction Service instance used when registering its interface with the Smart Agent. The default is <host_name>_ots .
<code>-Dvbroker.ots.logDir=<directory_name></code>	Names the directory in which logs and logger information are kept. If you do not specify, the default is <code><VBROKER_ADM>\its\<transaction_service_name>\logger</code> .
<code>-Dvbroker.ots.exitOnShutdown</code>	If set to true, this will terminate your in-process instance of the VisiTransact Transaction Service and bring down your application process as well when the VisiTransact Transaction Service is shut down remotely using vshutdown or the Console. If it is either not set or set to false, this will deactivate the VisiTransact Transaction Service objects registered with the Smart Agent but will NOT bring down your application process.

Error codes

This section provides information about error codes for VisiTransact Transaction Manager.

VisiTransact Transaction Manager common error codes

The following table lists common error codes for VisiTransact Transaction Manager.

Error code	Description	Possible causes	Solutions
201	Permission to access the file or directory is denied.	The process does not have the necessary permissions for accessing the file or directory.	Change the file or directory permissions to allow the process to access it.
202	The process cannot open the requested file.	The file is in the wrong directory.	Verify that the file is in the correct directory, and try again.
		The process does not have permission to access the file.	Change the file permissions to allow the process to access it.
203	An error occurred while reading the file.	The process does not have permission to read the file.	Change the file permissions to allow the process to read the file.
204	An error occurred while writing to the file.	The process has read-only permission. it does not have permission to write to the file.	Change the file permissions to allow the process to write to the file.
		The storage is full, and the system does not have enough room to write the changes to the file.	Clean up the storage, and then try again.
801	An error occurred while attempting to list an object of the given type.	No Location Service is available.	Verify that a Location Service is available. See the VisiBroker ORB documentation for details.
		No Smart Agent is running.	Start the Smart Agent using the osagent command. See the VisiBroker ORB documentation for details.
		The process is experiencing a communication problem.	Verify that all required processes are running, and all machines are up, and try again.

VisiTransact Transaction Service error codes

The following table lists the error codes for the VisiTransact Transaction Service.

Error code	Description	Possible causes	Solutions
4000	An instance of the VisiTransact Transaction Service was started successfully.	This is an informational message only.	This message requires no action.
4001	An instance of the VisiTransact Transaction Service is shutting down by request.	An administrator or other individual has shutdown the instance of the VisiTransact Transaction Service using either the vshutdown command, Ctrl+C or the kill command.	This message requires no action.
4002	The instance of the VisiTransact Transaction Service is prepared to shutdown, but is waiting for outstanding transactions to enter the completion stage before exiting.	The request to shutdown the instance of the VisiTransact Transaction Service was issued without the -immediate argument, allowing the instance to let outstanding transactions enter the completion stage before exiting.	This message requires no action. If you want to shutdown an instance of the VisiTransact Transaction Service without allowing outstanding transactions to enter the completion stage, use the -immediate argument when issuing the vshutdown command.
4003	The instance of the VisiTransact Transaction Service is shutting down without waiting for outstanding transactions to enter the completion stage.	The request to shutdown the instance of the VisiTransact Transaction Service was issued with the -immediate argument, allowing the instance to shutdown without letting outstanding transactions enter the completion stage.	This message requires no action. If you want to shutdown an instance of the VisiTransact Transaction Service and allow outstanding transactions to enter the completion stage, issue the vshutdown command without the -immediate argument.
4004	A HeuristicHazard exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision and does not know the outcome of at least one relevant update.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4005	A HeuristicCommit exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision to commit all relevant updates.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.

Error code	Description	Possible causes	Solutions
4006	A HeuristicRollback exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision to rollback all relevant updates.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4007	A HeuristicMixed exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision which differs from the outcome of the transaction. Some updates have been committed, others have been rolled back.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4008	An exception was caught and ignored during the callback for a specific alarm (listed in the message).	This message could be thrown for various reasons, including running out of system resources.	Ignore this message.
4009	An internal application error occurred.	An internal module of VisiTransact Transaction Manager, used by several VisiTransact components, could not be initialized due to an unknown exception.	Contact VisiBroker Technical Support.
4010	An internal application error occurred, as described in the message.	An internal module of VisiTransact Transaction Manager, used by several VisiTransact components, could not be initialized due to the exception listed in the message.	Contact VisiBroker Technical Support.
4011	An exception occurred while parsing the initialization arguments listed in the message.	The wrong command-line arguments were entered when executing a VisiTransact command.	Verify the command-line arguments, and try again.
4012	An exception occurred while parsing some initialization arguments, but it is unknown which arguments were incorrect.	The wrong command-line arguments were entered when executing a VisiTransact command.	Verify the command-line arguments, and try again. See
4014	An initialization failure (specified in the message) occurred while starting an instance of the VisiTransact Transaction Service.	The wrong configuration file was used, or incorrect values were entered for initialization parameters. An internal application error has occurred.	Verify you are using the correct configuration file, and are entering correct values for the initialization parameters. Contact VisiBroker Technical Support.
4015	A runtime exception occurred within a running instance of the VisiTransact Transaction Service.	An internal application error has occurred.	Contact VisiBroker Technical Support.

Error code	Description	Possible causes	Solutions
4016	The default transaction timeout has been changed to the value of the maximum transaction timeout.	The value of the default transaction timeout was higher than the value of the maximum transaction timeout.	Verify that you have coordinated your timeout settings between your applications and any command-line arguments you are using when starting instances of the VisiTransact Transaction Service.
4017	An invalid value was provided for the default transaction timeout. The timeout value was reset to 600 seconds.	When setting the default timeout value, a zero or a negative value was provided. The default timeout value must be at least 1 second.	When setting the default timeout value, make sure to set it to a value greater than or equal to 1 second. The recommended value is 600 seconds.
4018	An unexpected exception was received by the VisiTransact Transaction Service during transaction completion. The VisiTransact Transaction Service will retry transaction completion.	An internal application error has occurred.	Contact VisiBroker Technical Support.
4019	An unexpected CORBA exception was received by the VisiTransact Transaction Service during transaction completion. The VisiTransact Transaction Service will retry transaction completion.	An internal application error has occurred.	Contact VisiBroker Technical Support.

VisiTransact transaction log error codes

The following table lists error codes for the VisiTransact transaction log.

Error code	Description	Possible causes	Solutions
8001	An internal error occurred in the logger module. See the message log for details.	See the error text in the message log.	If you cannot resolve this error from the error text displayed in the message log, contact VisiBroker Technical Support.

Native Messaging Interfaces and Classes for C++

This section describes the interfaces and classes associated with the Native Messaging.

RequestAgent

```
class NativeMessaging::RequestAgent : public virtual
    CORBA_Object
```

The Request Agent interface defines operations of the Native Messaging Request Agent.

Include File

Include the NativeMessaging_c.hh file when you use this class.

IDL definition

```
module NativeMessaging {
    interface RequestAgent {

        exception DuplicatedRequestTag {};
        exception PollingGroupIsEmpty {};
        exception RequestNotExist {};

        Request create_request(
            in RequestDesc desc) raises
            (DuplicatedRequestTag);

        RequestTagSeq poll(
            in string                polling_group,
            in unsigned long         timeout,
            in boolean                unmask) raises
            (PollingGroupIsEmpty);

        void destroy_request(
            in Request req) raises
            (RequestNotExist);

    };
};
```

RequestAgent Methods

create_request

```
virtual ::CORBA::Object_ptr create_request(  
    const NativeMessaging::RequestDesc& _desc);
```

This method creates and returns an asynchronous method invocation request object in the Request Agent.

Parameter	Description
<code>_desc</code>	The RequestDesc structure containing information about the target object and async request.

The method throws `DuplicatedRequestTag` exception.

poll

```
virtual NativeMessaging::RequestTagSeq* poll(const  
    char* _polling_group, ::CORBA::Ulong _timeout,  
    ::CORBA::Boolean _umask);
```

The method returns the sequence of request tags whose replies are ready.

Parameter	Description
<code>_polling_group</code>	The name of the polling group
<code>_timeout</code>	The timeout interval in "milliseconds" to wait if the polling group has no readily available replies. The values have following meanings: <ul style="list-style-type: none">• <code>timeout > 0</code> poll will block for that much time. If after the timeout, there are still no replies available, an empty sequence of request tags is returned.• <code>timeout=0</code> poll will not block. If there are any replies available, their tags will be returned to the caller. If there are no replies available, an empty sequence is returned.• <code>timeout < 0</code> (or <code>timeout=2^(32-1)</code>) poll will block until a reply is available.
<code>_unmask</code>	If this flag is false, subsequent calls to poll on the same polling group will also return the request tags returned in the previous polls, until those request get destroyed either as a result of manual or automatic trash. If this flag is true, once a request tag is returned in the poll, it will not appear in subsequent polls.

This method throws `PollingGroupIsEmpty` exception.

destroy_request

```
virtual void destroy_request(::CORBA::Object_ptr _req);
```

This method destroys an async request.

Parameter	Description
<code>_req</code>	The async request object reference to be destroyed.

This method throws `RequestNotExist` exception.

RequestDesc

```
struct NativeMessaging::RequestDesc;
```

A descriptor structure containing all the information needed to service a async request.

Include File

Include the `NativeMessaging_c.hh` file when you use this struct.

IDL Definition

```
module NativeMessaging {
    typedef Object          Request;
    typedef sequence<octet> OctetSeq;
    typedef OctetSeq       RequestTag;
    typedef sequence<RequestTag> RequestTagSeq;
    typedef OctetSeq       Cookie;

    struct RequestDesc {
        Object          target;
        string          repository_id;
        ReplyRecipient reply_recipient;
        Cookie          the_cookie;
        string          polling_group;
        RequestTag      request_tag;
        PropertySeq     properties;
    };
};
```

RequestDesc Fields

Field	Description
target	Reference of the target object, on which client wish to invoke an operation. CORBA::BAD_PARAM exception will result if a null value is passed.
repository_id	Repository id of the target object. If this is an empty string, request agent will try to extract the rep id from the target object reference. If rep id empty here and also null or empty in the target IOR reference, a CORBA::BAD_PARAM exception is thrown. Clients can also use a repository id of *. This acts as a wild card and <code>is_a</code> operation on the request object returns true for any repository id.
reply_recipient	The reference of the reply recipient (or reply handler) when using callback model. If this reference is not null then the Request Agent will call its <code>reply_available</code> method when a reply is ready.
the_cookie	A user specified sequence of octets. It will be sent to the <code>reply_recipient</code> when <code>reply_available</code> is called. The information inside the cookie is user defined.

Field	Description
polling_group	A user assigned polling group name. The group name is scoped inside the Request Agent. Group names are not uniquely used. If a non-empty group name string is assigned and the Request Agent doesn't have a polling group with the same name, a new group with that name will be implicitly created. However, if a group already exists, the created request object is inserted into that group.
request_tag	User assigned. If non-empty, it uniquely identifies the request in the group. If another request in the group has the same tag, create_request method throws DuplicatedRequestTag exception.
properties	Sequence of Property structure. Currently only one Property value is defined (see Property structure)

ReplyRecipient

```
class NativeMessaging::ReplyRecipient : public virtual
CORBA_Object
```

Defines the interface for callback reply recipient.

Include File

Include the NativeMessaging_c.hh file when you use this class.

```
module NativeMessaging {
interface ReplyRecipient {
void reply_available(
in Request reply_holder,
in string operation,
in Cookie the_Cookie);
};
};
```

ReplyRecipient methods

reply_available

```
virtual void reply_available (::CORBA::Object_ptr
_reply_holder, const char* _operation, const
NativeMessaging::OctetSeq& _the_Cookie);
```

Parameter	Description
_reply_holder	async request for which reply is received.
_operation	operation invoked by the client.
_the_Cookie	cookie passed by the client when creating the request.

REPLY_NOT_AVAILABLE

This constant defines the `CORBA::NO_RESPONSE` exception minor code value thrown by the RequestAgent to the polling client when the reply for a request is not available.

Include File

Include the `NativeMessaging_c.hh` file when you use this constant.

IDL definition

```
module NativeMessaging {
    const unsigned long REPLY_NOT_AVAILABLE = 100;
};
```

Property

```
struct NativeMessaging::Property;
```

Holds a symbolic property name and its value inside an `CORBA::Any`.

Include File

Include the `NativeMessaging_c.hh` file when you use this struct.

IDL definition

```
module NativeMessaging {
    struct Property {
        string name;
        any value;
    };
};
```

Property Fields

Field	Description
name	The name of the property. Currently only one name is recognized: <code>RequestManualTrash</code>
value	The value of the property. The <code>RequestManualTrash</code> has a value of type <code>boolean</code> : If set to <code>true</code> , the request is destroyed manually by calling <code>destroy_request</code> method. If set to <code>false</code> , the request is destroyed automatically once the reply is read (default).

PropertySeq

```
class NativeMessaging::PropertySeq : private
    VISResource
```

A Sequence of `Property` that is passed inside `RequestDesc` while creating async Request.

Include File

Include the `NativeMessaging_c.hh` file when you use this class.

OctetSeq

```
class NativeMessaging::OctetSeq : private VISResource
```

This class represents a sequence of octets. Similar to CORBA::OctetSeq but defined here to make the NativeMessaging.idl independent of any other IDL.

Include File

Include the NativeMessaging_c.hh file when you use this class.

RequestTag

```
typedef OctetSeq RequestTag;
```

An octet sequence identifying a request inside a polling group.

Include File

Include the NativeMessaging_c.hh file when you use this class.

RequestTagSeq

```
class NativeMessaging::RequestTagSeq : private  
    VISResource
```

Instances of this class are returned by the RequestAgent's poll method when group polling is performed. Each element in the sequence is a RequestTag; the octet sequence identifying a request inside the polling group.

Include File

Include the NativeMessaging_c.hh file when you use this class.

Cookie

```
typedef OctetSeq Cookie
```

An octet sequence that is passed inside RequestDesc while creating async Request. The contents inside the Cookie are user defined. The Request Agent passes this Cookie to ReplyRecipient's reply_available method when callback occurs.

Include File

Include the NativeMessaging_c.hh file when you use this type.

DuplicatedRequestTag

```
class DuplicatedRequestTag : public CORBA_UserException
```

This class defines a `UserException` that is raised if the `async` request is created with a polling group name specified and there is another request in the polling group with the same request tag.

Include File

Include the `NativeMessaging_c.hh` file when you use this class.

PollingGroupIsEmpty

```
class PollingGroupIsEmpty : public CORBA_UserException
```

This class defines a `UserException` that is raised if `poll` method is called on the `RequestAgent` and:

- 1 There is no group with the specified name.
- 2 The polling group exists but contains no requests that are waiting for replies.

Include File

Include the `NativeMessaging_c.hh` file when you use this class.

RequestNotExist

```
class RequestNotExist : public CORBA_UserException
```

This class defines a `UserException` that is raised if the `destroy_request` method is called on `RequestAgent` and the specified request could not be found or is already destroyed.

Include File

Include the `NativeMessaging_c.hh` file when you use this class.

Portable Interceptor interfaces and classes for C++

This section describes the VisiBroker implementation of *Portable Interceptors* interfaces and classes as defined by the OMG Specification. For a complete description of these interfaces and classes, refer to *OMG Final Adopted Specification, ptc/2001-04-03, Portable Interceptors*.

Note

See “Using Portable Interceptors” in the *VisiBroker C++ Developer's Guide* before using these interfaces.

About Interceptors

The VisiBroker ORB provides a set of APIs known as interceptors which provide a way to plug in additional VisiBroker ORB behavior such as support for transactions and security. Interceptors are hooked into the VisiBroker ORB through which VisiBroker ORB services can intercept the normal flow of execution of the VisiBroker ORB. The following table lists the types of interceptor that VisiBroker supports.

For more information about using portable interceptors, see “Using Portable Interceptors” in the *VisiBroker C++ Developer's Guide*.

Interceptor Type	Description
Portable Interceptor	Portable Interceptors is an OMG standardized feature that allows you to write portable code for interceptors and use it with different vendor ORBs.
VisiBroker Interceptors	VisiBroker Interceptors are Micro Focus proprietary interceptors defined in VisiBroker.

For more information about using interceptors, go to “[VisiBroker Interceptor and object wrapper interfaces and classes for C++](#)”, and the *VisiBroker for C++ Developer's Guide*, “Using Portable Interceptors” section for more information.

The following table lists the two types of portable interceptor.

Interceptor Type	Description
Request Interceptor	Use to enable VisiBroker ORB services to transfer context information between clients and servers. Request Interceptors are further divided into Client Request Interceptors and Server Request Interceptors.
IOR Interceptors	Use to enable a VisiBroker ORB service to add information, in an IOR, describing the server's or object's ORB service related capabilities. For example, a security service (like SSL) can add its tagged component into the IOR so that clients recognizing that component can establish the connection with the server based on the information in the component.

For more information about using portable interceptors, see “Using Portable Interceptors” in the *VisiBroker for C++ Developer's Guide*.

ClientRequestInfo

```
class PortableInterceptor::ClientRequestInfo : public
    virtual RequestInfo
```

This class is derived from RequestInfo. It is passed to the client side interceptors point.

Some methods on ClientRequestInfo are not valid at all interception points. The following table shows the validity of each attribute or method. If an attribute is not valid, attempting to access it results in a BAD_INV_ORDER being raised with a standard minor code of 14.

	send_request	send_poll	receive_reply	receive_exception	receive_other
request_id	yes	yes	yes	yes	yes
operation	yes	yes	yes	yes	yes
arguments	yes ¹	no	yes	no	no
exception	yes	no	yes	yes	yes
contexts	yes	no	yes	yes	yes
operation_context	yes	no	yes	yes	yes
result	no	no	yes	no	no
response_expected	yes	yes	yes	yes	yes
sync_scope	yes	no	yes	yes	yes
reply_status	no	no	yes	yes	yes
forward_reference	no	no	no	no	yes ²
get_slot	yes	yes	yes	yes	yes
get_request_service_context	yes	no	yes	yes	yes
get_reply_service_context	no	no	yes	yes	yes
target	yes	yes	yes	yes	yes
effective_target	yes	yes	yes	yes	yes
effective_profile	yes	yes	yes	yes	yes
received_exception	no	no	no	yes	no
received_exception_id	no	no	no	yes	no
get_effective_component	yes	no	yes	yes	yes
get_effective_components	yes	no	yes	yes	yes
get_request_policy	yes	no	yes	yes	yes
add_request_service_context	yes	no	no	no	no

¹ When ClientRequestInfo is passed to send_request(), there is an entry in the list for every argument, whether in, inout, or out. But only the in and inout arguments will be available.

² If the reply_status() does not return LOCATION_FORWARD, accessing this attribute raises BAD_INV_ORDER with a standard minor code of 14.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ClientRequestInfo methods

```
virtual CORBA::Object_ptr target() = 0;
```

This method returns the object which the client called to perform the operation. See `effective_target()` below.

```
virtual CORBA::Object_ptr effective_target() = 0;
```

This method returns the actual object on which the operation will be invoked. If the `reply_status()` returns `LOCATION_FORWARD`, then on subsequent requests, `effective_target()` will contain the forwarded IOR, while `target` will remain unchanged.

```
virtual IOP::TaggedProfile* effective_profile() = 0;
```

This method returns the profile, in the form of `IOP::TaggedProfile`, that will be used to send the request. If a location forward has occurred for this operation's object and that object's profile changed accordingly, then this profile will be that located profile.

```
virtual CORBA::Any* received_exception() = 0;
```

This method returns the data, in the form of `CORBA::Any`, that contains the exception to be returned to the client.

If the exception is a user exception which cannot be inserted into a `CORBA::Any` (for example, it is unknown or the bindings don't provide the `TypeCode`), then this attribute will be a `CORBA::Any` containing the system exception `UNKNOWN` with a standard minor code of 1. However, the `RepositoryId` of the exception is available in the `received_exception_id` attribute.

```
virtual char* received_exception_id() = 0;
```

This method returns the ID of the `received_exception` to be returned to the client.

```
virtual IOP::TaggedComponent*  
    get_effective_component(CORBA::ULong _id) = 0;
```

This methods returns the `IOP::TaggedComponent` with the given ID from the profile selected for this request.

If there is more than one component for a given component ID, it is undefined which component this operation returns. If there is more than one component for a given component ID, `get_effective_components()` will be called instead.

If no component exists for the given component ID, this operation will raise `BAD_PARAM` with a standard minor code of 28.

Parameter	Description
<code>_id</code>	ID of the component which is to be returned.

```
virtual IOP::TaggedComponentSeq*
    get_effective_components(
        CORBA::ULong _id) = 0;
```

This method returns all the tagged components with the given ID from the profile selected for this request. This sequence is in the form of an IOP::TaggedComponentSeq.

If no component exists for the given component ID, this operation will raise BAD_PARAM with a standard minor code of 28.

Parameter	Description
<code>_id</code>	ID of the components which are to be returned.

```
virtual CORBA::Policy_ptr
    get_request_policy(CORBA::ULong _type) = 0;
```

This method returns the given policy in effect for this operation.

If the policy type is not valid, either because the specified type is not supported by this ORB or because a policy object of that type is not associated with this Object, INV_POLICY with a standard minor code of 2 is raised.

Parameter	Description
<code>_type</code>	Type of policy which specifies the policy to be returned.

```
virtual void add_request_service_context(
    const IOP::ServiceContext& _service_context,
    CORBA::Boolean _replace) = 0;
```

This method allows interceptors to add service contexts to the request.

There is no declaration of the order of the service contexts. They may or may not appear in the order in which they are added.

Parameter	Description
<code>_service_context</code>	IOP::ServiceContext to be added to the request.
<code>_replace</code>	Indicates the behavior of this method when a service context already exists with the given ID. If false, then BAD_INV_ORDER with a standard minor code of 15 is raised. If true, then the existing service context is replaced by the new one.

ClientRequestInterceptor

```
class PortableInterceptor::ClientRequestInterceptor :
    public virtual Interceptor
```

This ClientRequestInterceptor class is used to derive user-defined client side interceptor. A ClientRequestInterceptor instance is registered with the VisiBroker ORB (go to ["ORBInitializer" on page 222](#) for more information).

Include file

Include the **PortableInterceptor_c.hh** file when you use this class.

ClientRequestInterceptor methods

```
virtual void send_request(ClientRequestInfo_ptr _ri) = 0;
```

This `send_request()` interception point allows an interceptor to query request information and modify the service context before the request is sent to the server.

This interception point may raise a system exception. If it does, no other interceptors' `send_request()` interception points are called. Those interceptors on the Flow Stack are popped and their `receive_exception()` interception points are called.

This interception point may also raise a `ForwardRequest` exception (go to ["ForwardRequest" on page 217](#) for more information). If an Interception raises this exception, no other interceptors' `send_request` methods are called. The remaining interceptors in the Flow Stack are popped and have their `receive_other()` interception point called.

Parameter	Description
<code>_ri</code>	ClientRequestInfo instance to be used by interceptor.

```
virtual void send_poll(ClientRequestInfo_ptr _ri) = 0;
```

This `send_poll()` interception point allows an interceptor to query information during a Time-Independent Invocation (TII) polling get reply sequence.

However, as the VisiBroker ORB does not support TII, this `send_poll()` interception point will never be called.

Parameter	Description
<code>_ri</code>	ClientRequestInfo instance to be used by interceptor.

```
virtual void receive_reply(ClientRequestInfo_ptr _ri) = 0;
```

This `receive_reply()` interception point allows an interceptor to query the information on a reply after it is returned from the server and before control is returned to the client.

This interception point may raise a system exception. If it does, no other interceptors' `receive_reply()` methods are called. The remaining interceptors in the Flow Stack will have their `receive_exception()` interception point called.

Parameter	Description
<code>_ri</code>	ClientRequestInfo instance to be used by interceptor.

```
virtual void receive_exception(ClientRequestInfo_ptr  
_ri) = 0;
```

This `receive_exception()` interception point is called when an exception occurs. It allows an interceptor to query the exception's information before it is raised to the client.

This interception point may raise a system exception. This has the effect of changing the exception which successive interceptors popped from the Flow

Stack receive on their calls to `receive_exception()`. The exception raised to the client will be the last exception raised by an interceptor, or the original exception if no interceptor changes the exception.

This interception point may also raise a `ForwardRequest` exception (go to [“ForwardRequest” on page 217](#) for more information). If an interceptor raises this exception, no other interceptors' `receive_exception()` interception points are called. The remaining interceptors in the Flow Stack are popped and have their `receive_other()` interception point called.

Parameter	Description
<code>_ri</code>	<code>ClientRequestInfo</code> instance to be used by interceptor.

```
virtual void receive_other(ClientRequestInfo_ptr _ri) = 0;
```

This `receive_other()` interception point allows an interceptor to query the information available when a request results in something other than a normal reply or an exception. For example, a request could result in a retry (for example, a GIOP Reply with a `LOCATION_FORWARD` status was received), or on asynchronous calls, the reply does not immediately follow the request, but control will return to the client and an ending interception point will be called.

For retries, depending on the policies in effect, a new request may or may not follow when a retry has been indicated. If a new request does follow, while this request is a new request, with respect to interceptors, there is one point of correlation between the original request and the retry: because control has not returned to the client, the request scoped `PortableInterceptor::Current` for both the original request and the retrying request is the same (go to [“Current” on page 215](#) for more information).

This interception point may raise a system exception. If it does, no other interceptors' `receive_other()` interception points are called. The remaining interceptors in the Flow Stack are popped and have their `receive_exception()` interception point called.

This interception point may also raise a `ForwardRequest` exception (go to [“ForwardRequest” on page 217](#) for more information). If an interceptor raises this exception, successive interceptors' `receive_other()` methods are called with the new information provided by the `ForwardRequest` exception.

Parameter	Description
<code>_ri</code>	<code>ClientRequestInfo</code> instance to be used by interceptor.

Codec

```
class IOP::Codec
```

The formats of IOR components and service context data used by ORB services are often defined as CDR encapsulations encoding instances of IDL defined data types. Codec provides a mechanism to transfer these components between their IDL data types and their CDR encapsulation representations.

A Codec is obtained from the CodecFactory. The CodecFactory is obtained through a call to `ORB::resolve_initial_references("CodecFactory")`.

Include file

Include the `IOP_c.hh` file when you use this class.

Codec Member Classes

```
class Codec::InvalidTypeForEncoding : public
    CORBA_UserException
```

This exception is raised by `encode()` or `encode_value()` when an invalid type is specified for the encoding.

```
class Codec::FormatMismatch : public
    CORBA_UserException
```

This exception is raised by `decode()` or `decode_value()` when the data in the octet sequence cannot be decoded into a `CORBA::Any`.

```
class Codec::TypeMismatch : public CORBA_UserException
```

This exception is raised by `decode_value()` when the given `TypeCode` does not match the given octet sequence.

Codec Methods

```
virtual CORBA::OctetSequence* encode(const CORBA::Any&
    _data) = 0;
```

This method converts the given data in the form of a `CORBA::Any` into an octet sequence based on the encoding format effective for this Codec. This octet sequence contains both the `TypeCode` and the data of the type.

This operation may raise `InvalidTypeForEncoding`.

Parameter	Description
<code>_data</code>	Data, in the form of a <code>CORBA::Any</code> , to be encoded into an octet sequence.

```
virtual CORBA::Any* decode(const CORBA::OctetSequence&
    _data) = 0;
```

This method decodes the given octet sequence into a `CORBA::Any` object based on the encoding format effective for this Codec.

This method raises `FormatMismatch` if the octet sequence cannot be decoded into a `CORBA::Any`.

Parameter	Description
<code>_data</code>	Data, in the form of an octet sequence, to be decoded into a <code>CORBA::Any</code> .

```
virtual CORBA::OctetSequence* encode_value(const
CORBA::Any& _data) = 0;
```

This method converts the given CORBA::Any object into an octet sequence based on the encoding format effective for this Codec. Only the data from the CORBA::Any is encoded, not the TypeCode.

This operation may raise `InvalidTypeForEncoding`.

Parameter	Description
<code>_data</code>	Octet sequence containing the data from the encoded CORBA::Any.

```
virtual CORBA::Any* decode_value(const
CORBA::OctetSequence& _data, CORBA::TypeCode_ptr _tc)
= 0;
```

This method decodes the given octet sequence into a CORBA::Any based on the given TypeCode and the encoding format effective for this Codec.

This method raises `FormatMismatch` if the octet sequence cannot be decoded into a CORBA::Any.

Parameter	Description
<code>_data</code>	Data, in the form of an octet sequence, to be decoded into a CORBA::Any.
<code>_tc</code>	TypeCode to be used to decode the data.

CodecFactory

```
class IOP::CodecFactory
```

This class is used to obtain a Codec. The CodecFactory is obtained through a call to

```
ORB::resolve_initial_references("CodecFactory").
```

Include file

Include the `IOP_c.hh` file when you use this class.

CodecFactory Member

```
class CodecFactory::UnknownEncoding : public
CORBA_UserException
```

This exception is raised if CodecFactory cannot create a Codec. See `create_codec()` function below.

CodecFactory Method

```
virtual Codec_ptr create_codec(const Encoding& _enc) =
0;
```

This `create_codec()` method creates a Codec of the given encoding.

This method raises `UnknownEncoding` if this factory cannot create a `Codec` of the given encoding.

Parameter	Description
<code>_enc</code>	Specifies the encoding to be used for creating a <code>Codec</code> .

Current

```
class PortableInterceptor::Current: public virtual  
    CORBA::Current, public virtual CORBA_Object
```

The `Current` class is merely a slot table, the slots of which are used by each service to transfer their context data between their context and the request's or reply's service context.

Each service which wishes to use `Current` reserves a slot or slots at initialization time (go to [“virtual CORBA::ULong allocate_slot_id\(\) = 0;” on page 225](#) for more information) and uses those slots during the processing of requests and replies.

Before an invocation is made, `Current` is obtained by way of a call to `ORB::resolve_initial_references("PICurrent")`.

From within the interception points, the data on `Current` that has moved from the thread scope to the request scope is available by way of the `get_slot()` method on the `RequestInfo` object. A `Current` can still be obtained by way of `resolve_initial_references()`, but that is the interceptor's thread scope `Current`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

Current Methods

```
virtual CORBA::Any* get_slot(CORBA::ULong _id);
```

A service can get the slot data it sets in `PICurrent` by way of the `get_slot()` method. The data is in the form of a `CORBA::Any` object.

If the given slot has not been set, a `CORBA::Any` containing a type code with a `TCKind` value of `tk_null`, no value is returned.

If `get_slot()` is called on a slot that has not been allocated, `InvalidSlot` is raised.

If `get_slot()` is called from within an ORB initializer, `BAD_INV_ORDER` with a minor code of 14 is raised.

Parameter	Description
<code>_id</code>	<code>SlotId</code> of the slot from which the data will be returned.

```
virtual void set_slot(CORBA::ULong _id, const  
    CORBA::Any& _data);
```

A service sets data in a slot with `set_slot()`. The data is in the form of a `CORBA::Any` object.

If data already exists in that slot, it is overridden.

If `set_slot()` is called on a slot that has not been allocated, `InvalidSlot` is raised.

If `set_slot()` is called from within an ORB initializer (go to [“ORBInitializer” on page 222](#) for more information) `BAD_INV_ORDER` with a minor code of 14 is raised.

Parameter	Description
<code>_id</code>	SlotId of the slot from which the data will be set.
<code>_data</code>	data, in the form of a <code>CORBA::Any</code> object, which will be set to the identified slot.

Encoding

```
struct IOP::Encoding
```

This structure defines the encoding format of a Codec. It details the encoding format, such as CDR Encapsulation encoding, and the major and minor versions of that format.

The supported encodings are:

- `ENCODING_CDR_ENCAPS`, version 1.0;
- `ENCODING_CDR_ENCAPS`, version 1.1;
- `ENCODING_CDR_ENCAPS`, version 1.2;
- `ENCODING_CDR_ENCAPS` for all future versions of GIOP as they arise.

Include file

Include the `IOP_c.hh` file when you use this struct.

Members

```
CORBA::Short format;
```

This member holds the encoding format for a Codec.

```
CORBA::Octet major_version;
```

This member holds the major version number for a Codec.

```
CORBA::Octet minor_version;
```

This member holds minor version number for a Codec.

ExceptionList

```
class Dynamic::ExceptionList
```

Use this class to hold exceptions information returned from the method `exceptions()` in the class `RequestInfo`. It is an implementation of variable-length array of type `CORBA::TypeCode`. The length of `ExceptionList` is available at run time.

For more information, go to [“virtual Dynamic::ExceptionList* exceptions\(\) = 0;” on page 228](#).

Include file

Include the `Dynamic_c.hh` file when you use this class.

ForwardRequest

```
class PortableInterceptor::ForwardRequest : public
    CORBA_UserException
```

The `ForwardRequest` exception is the means by which an interceptor can indicate to the ORB that a retry of the request should occur with the new object given in the exception. This behavior of causing a retry only occurs if the ORB receives a `ForwardRequest` from an interceptor. If `ForwardRequest` is raised anywhere else, it is passed through the ORB as is normal for a user exception.

If an interceptor raises a `ForwardRequest` exception in response to a call of an interceptor, no other interceptors are called for that interception point. The remaining interceptors in the Flow Stack will have their appropriate ending interception point called: `receive_other()` on the client, or `send_other()` on the server. The `reply_status()` in the `receive_other()` or `send_other()` will return `LOCATION_FORWARD`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

Interceptor

```
class PortableInterceptor::Interceptor
```

This is the base class from which all interceptors are derived.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

Interceptor methods

```
virtual char* name() = 0;
```

This method returns the name of the interceptor. Each interceptor may have a name which can be used to order the lists of interceptors. Only one interceptor of a given name can be registered with the VisiBroker ORB for each interceptor type. An interceptor may be anonymous, such as it has an empty string as the `name` attribute. Any number of anonymous interceptors may be registered with the VisiBroker ORB.

```
virtual void destroy() = 0;
```

This method is called during `ORB::destroy()`. When `ORB::destroy()` is called by an application, the VisiBroker ORB:

- 1 waits for all requests in progress to complete
- 2 calls the `Interceptor::destroy()` method for each interceptor
- 3 completes destruction of the ORB

Method invocations from within `Interceptor::destroy()` on object references for objects implemented on the ORB being destroyed result in undefined behavior. However, method invocations on objects implemented on VisiBroker ORB, other than the one being destroyed, are permitted. (This means that the VisiBroker ORB being destroyed is still capable of acting as a client, but not as a server.)

IORInfo

```
class PortableInterceptor::IORInfo
```

The `IORInfo` interface provides the server side ORB service with access to the applicable policies during IOR construction and the ability to add components. The ORB passes an instance of its implementation of this interface as a parameter to `IORInterceptor::establish_components()`.

The table below defines the validity of each attribute or method in `IORInfo` in the methods defined in the `IORInterceptor`.

	establish_components	components_established
<code>get_effective_policy</code>	yes	yes
<code>add_ior_component</code>	yes	no
<code>add_ior_component_to_profile</code>	yes	no
<code>manager_id</code>	yes	yes
<code>state</code>	yes	yes
<code>adapter_template</code>	no	yes
<code>current_factory</code>	no	yes

If an illegal call is made to an attribute or method in `IORInfo`, the `BAD_INV_ORDER` system exception is raised with a standard minor code value of 14.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

IORInfo Methods

```
virtual CORBA::Policy_ptr
    get_effective_policy(CORBA::ULong _type) = 0;
```

An ORB service implementation may determine what server side policy of a particular type is in effect for an IOR being constructed by calling the `get_effective_policy()` method. When the IOR being constructed is for an object implemented using a POA, all `Policy` objects passed to the `PortableServer::POA::create_POA()` call that created that POA are accessible via `get_effective_policy`.

If a policy for the given type is not known to the ORB, then this method will raise `INV_POLICY` with a standard minor code of 3.

Parameter	Description
<code>_type</code>	<code>CORBA::PolicyType</code> specifying the type of policy to return.

```
virtual void add_ior_component(const
    IOP::TaggedComponent& _a_component) = 0;
```

This method is called from `establish_components()` to add a tagged component to the set which will be included when constructing IORs. The components in this set will be included in all profiles.

Any number of components may exist with the same component ID.

Parameter	Description
<code>_a_component</code>	IOP::TaggedComponent to be added.

```
virtual void add_ior_component_to_profile(const
    IOP::TaggedComponent& _a_component, CORBA::ULong
    _profile_id) = 0;
```

This method is called from `establish_components()` to add a tagged component to the set which will be included when constructing IORs. The components in this set will be included in the specified profile.

Any number of components may exist with the same component ID.

If the given profile ID does not define a known profile or it is impossible to add components to that profile, `BAD_PARAM` is raised with a standard minor code of 29.

Parameter	Description
<code>_a_component</code>	IOP::TaggedComponent to be added.
<code>_profile_id</code>	IOP::ProfileId of the profile to which this component will be added.

```
virtual CORBA::Long manager_id() = 0;
```

This method returns the attribute that provides an opaque handle to the manager of the adapter. This is used for reporting state changes in adapters managed by the same adapter manager.

```
virtual CORBA::Short state() = 0;
```

This method returns the current state of the adapter. This must be one of `HOLDING`, `ACTIVE`, `DISCARDING`, `INACTIVE`, `NON_EXISTENT`.

```
virtual ObjectReferenceTemplate_ptr adapter_template()
    = 0;
```

This method returns the attribute that provides a means to obtain an object reference template whenever an IOR interceptor is invoked. There is no standard way to directly create an object reference template. The value of `adapter_template()` returns is the template created for the adapter policies and IOR interceptor calls to `add_component()` and `add_component_to_profile()`. The value of the `adapter_template()` returns is never changed for the lifetime of the object adapter.

```
virtual ObjectReferenceFactory_ptr current_factory() =
    0;
```

This method returns the attribute that provides access to the factory that will be used by the adapter to create object references. `current_factory()` initially has the same value as the `adapter_template` attribute, but this can be changed by setting

current_factory to another factory. All object references created by the object adapter must be created by calling the make_object() method on current_factory.

```
virtual void current_factory(ObjectReferenceFactory_ptr  
_current_factory) = 0;
```

This method sets the current_factory attribute. The value of the current_factory attribute that is used by the adapter can only be set during the call to the components_established method.

Parameter	Description
_current_factory	current_factory object which is to be set.

IORInfoExt

```
class IORInfoExt: public PortableInterceptor::IORInfo
```

This is the VisiBroker extensions to Portable Interceptors to allow installing of a POA scoped Server Request Interceptor. This IORInfoExt interface is inherited from IORInfo interface and has additional methods to support POA scoped Server Request Interceptor.

Include file

Include the PortableInterceptorExt_c.hh file when you use this class.

IORInfoExt Methods

```
virtual void add_server_request_interceptor (  
    ServerRequestInterceptor_ptr _interceptor) = 0;
```

This method is used to add a POA-scoped server side request interceptor to a service.

Parameter	Description
_interceptor	ServerRequestInterceptor to be added.

```
virtual char* full_poa_name();
```

This method return the full POA name.

IORInterceptor

```
class PortableInterceptor::IORInterceptor : public  
    virtual Interceptor
```

In some cases, a portable ORB service implementation may need to add information describing the server's or object's ORB service related capabilities to object references in order to enable the ORB service implementation in the client to function properly.

This is supported through the IORInterceptor and IORInfo interfaces.

The IOR Interceptor is used to establish tagged components in the profiles within an IOR.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

IORInterceptor Methods

```
virtual void establish_components(IORInfo_ptr _info) = 0;
```

A server side ORB calls the `establish_components()` method on all registered `IORInterceptor` instances when it is assembling the list of components that will be included in the profile(s) of an object reference. This method is not necessarily called for each individual object reference. In the case of the POA, these calls are made each time `POA::create_POA()` is called. In other adapters, these calls would typically be made when the adapter is initialized. The adapter template is not available at this stage since information (the components) needed in the adapter template is being constructed.

Parameter	Description
<code>_info</code>	IORInfo instance used by the ORB service to query applicable policies and add components to be included in the generated IORs.

```
virtual void components_established(IORInfo_ptr _info) = 0;
```

After all of the `establish_components()` methods have been called, the `components_established()` methods are invoked on all registered IOR interceptors. The adapter template is available at this stage. The `current_factory` attribute may be get or set at this stage.

Any exception that occurs in `components_established()` is returned to the caller of `components_established()`. In the case of the POA, this causes the `create_POA` call to fail, and an `OBJ_ADAPTER` exception with a standard minor code of 6 is returned to the invoker of `create_POA()`.

Parameter	Description
<code>_info</code>	IORInfo instance used by the ORB service to access applicable policies.

```
virtual void adapter_manager_state_changed(CORBA::Long _id, CORBA::Short _state) = 0;
```

Any time the state of an adapter manager changes, the `adapter_manager_state_changed()` method is invoked on all registered IOR interceptors.

If a state change is reported through `adapter_manager_state_changed()`, it is not reported through `adapter_state_changed()`.

Parameter	Description
<code>_id</code>	IORInfo instance used by the ORB service to access applicable policies.
<code>_state</code>	new state of the object adapter.

```
virtual void adapter_state_changed(const
    ObjectReferenceTemplateSeq& _templates, CORBA::Short
    _state) = 0;
```

Object adapter state changes are reported to this method any time the state of one or more adapters changes for reasons unrelated to adapter manager state changes. The templates argument identifies the object adapters that have changed state by the template ID information. The sequence contains the adapter templates for all object adapters that have made the state transition being reported.

Parameter	Description
<code>_templates</code>	identifies the object adapters that have changed state by the template ID information.
<code>_state</code>	new state of the object adapter.

ORBInitializer

```
class PortableInterceptor::ORBInitializer
```

An interceptor is registered by registering an associated ORBInitializer object which implements the ORBInitializer class. When an ORB is initializing, it calls each registered ORBInitializer, passing it an ORBInitInfo object which is used to register its interceptor.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ORBInitializer Methods

```
virtual void pre_init(ORBInitInfo_ptr _info) = 0;
```

This method is called during ORB initialization. If it is expected that initial services registered by an interceptor will be used by other interceptors, then those initial services are registered at this point via calls to ORBInitInfo::register_initial_reference().

Parameter	Description
<code>_info</code>	an object that provides initialization attributes and methods by which interceptors can be registered.

```
virtual void post_init(ORBInitInfo_ptr _info) = 0;
```

This method is called during ORB initialization. If a service must resolve initial references as part of its initialization, it can assume that all initial references will be available at this point.

Calling the post_init() methods is not the final task of ORB initialization. The final task, following the post_init() calls, is attaching the lists of registered interceptors to the ORB. Therefore, the ORB does not contain the interceptors during calls to post_init(). If an ORB-mediated call is made

from within `post_init()`, no request interceptors will be invoked on that call. Likewise, if a method is performed which causes an IOR to be created, no IOR interceptors will be invoked.

Parameter	Description
<code>_info</code>	An object that provides initialization attributes and methods by which interceptors can be registered.

ORBInitInfo

```
class PortableInterceptor::ORBInitInfo
```

This `ORBInitInfo` class is passed to `ORBInitializer` object for registering interceptors.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

ORBInitInfo Member Classes

```
class DuplicateName : public CORBA_UserException;
```

Only one interceptor of a given name can be registered with the ORB for each interceptor type. If an attempt is made to register a second interceptor with the same name, `DuplicateName` is raised.

An interceptor may be anonymous, such as it has an empty string as the name attribute. Any number of anonymous interceptors may be registered with the ORB, so if the interceptor being registered is anonymous, the registration operation will not raise `DuplicateName`.

```
class InvalidName: public CORBA_UserException
```

This exception is raised by `register_initial_reference()` and `resolve_initial_references()`.

`register_initial_reference()` raises `InvalidName` if:

- this method is called with an empty string `id`; or
- this method is called with an `id` that is already registered, including the default names defined by OMG.

`resolve_initial_references()` raises `InvalidName` if the name to be resolved is invalid.

ORBInitInfo Methods

```
virtual CORBA::StringSequence* arguments() = 0;
```

This method returns the arguments passed to `ORB_init()`. They may or may not contain the ORB's arguments.

```
virtual char* orb_id() = 0;
```

This method returns the ID of the ORB being initialized.

```
virtual IOP::CodecFactory_ptr codec_factory() = 0;
```

This method returns the IOP::CodecFactory. The CodecFactory is normally obtained via a call to ORB::resolve_initial_references("CodecFactory"), but since the ORB is not yet available and interceptors, particularly when processing service contexts, will require a Codec, a means of obtaining a Codec is necessary during ORB initialization.

```
virtual void register_initial_reference(const char*  
    _id, CORBA::Object_ptr _obj) = 0;
```

If this method is called with an id, "Y", and an object, YY, then a subsequent call to register_initial_reference() will return object YY.

This method is identical to ORB::register_initial_reference(). This same functionality exists here because the ORB, not yet fully initialized, is not yet available but initial references may need to be registered as part of Interceptor registration. The only difference is that the version of this method on the ORB uses PIDL (CORBA::ORB::ObjectId and CORBA::ORB::InvalidName) whereas the version in this interface uses IDL defined in this interface; the semantics are identical.

register_initial_reference() raises InvalidName if:

- this method is called with an empty string id; or
- this method is called with an id that is already registered, including the default names defined by OMG.

Parameter	Description
_id	ID by which the initial reference will be known.
_obj	The initial reference itself.

```
virtual CORBA::Object_ptr  
    resolve_initial_references(const char* _id) = 0;
```

This method is only valid during post_init(). It is identical to ORB::resolve_initial_references(). This same functionality exists here because the ORB, not yet fully initialized, is not yet available but initial references may be required from the ORB as part of Interceptor registration.

Parameter	Description
_id	ID by which the initial reference will be known.

If the name to be resolved is invalid, resolve_initial_references() will raise InvalidName.

```
virtual void  
    add_client_request_interceptor(ClientRequestIntercept  
    or_ptr _interceptor) = 0;
```

This method is used to add a client side request interceptor to the list of client side request interceptors.

If a client side request interceptor has already been registered with this interceptor's name, DuplicateName will be raised.

Parameter	Description
<code>_interceptor</code>	ClientRequestInterceptor to be added.

```
virtual void add_server_request_interceptor(  
    ServerRequestInterceptor_ptr _interceptor) = 0;
```

This method is used to add a server side request interceptor to the list of server side request interceptors.

If a server side request interceptor has already been registered with this interceptor's name, DuplicateName is raised.

Parameter	Description
<code>_interceptor</code>	ServerRequestInterceptor to be added.

```
virtual void add_ior_interceptor(IORInterceptor_ptr  
    _interceptor) = 0;
```

This method is used to add an IOR interceptor to the list of IOR interceptors.

If an IOR interceptor has already been registered with this interceptor's name, DuplicateName is raised.

Parameter	Description
<code>_interceptor</code>	IORInterceptor to be added.

```
virtual CORBA::ULong allocate_slot_id() = 0;
```

returns the index to the slot which has been allocated.

A service calls `allocate_slot_id` to allocate a slot on `PortableInterceptor::Current`.

Note

While slot id's can be allocated within an ORB initializer, the slots themselves cannot be initialized. Calling `set_slot()` or `get_slot()` on the `Current` within an ORB initializer will raise a `BAD_INV_ORDER` with a minor code of 14.

```
virtual void register_policy_factory(CORBA::ULong  
    _type, PolicyFactory_ptr _policy_factory) = 0;
```

This method registers a `PolicyFactory` for the given `PolicyType`.

If a `PolicyFactory` already exists for the given `PolicyType`, `BAD_INV_ORDER` is raised with a standard minor code of 16.

Parameter	Description
<code>_type</code>	CORBA::PolicyType that the given PolicyFactory serves.
<code>_policy_factory</code>	factory for the given CORBA::PolicyType.

Parameter

```
struct Dynamic::Parameter
```

This structure holds the parameter information. This structure is the element used in `ParameterList` (go to [“ParameterList” on page 226](#) for more information).

Include file

Include the `Dynamic_c.hh` file when you use this struct.

Members

```
CORBA::Any argument;
```

This member stores the parameter data in the form of `CORBA::Any`.

```
CORBA::ParameterMode mode;
```

This member specifies the mode of a parameter. Its value can be one of the enum values: `PARAM_IN`, `PARAM_OUT` or `PARAM_INOUT`.

ParameterList

```
class Dynamic::ParameterList
```

This class is used to pass parameters information returned from the method `arguments()` in the class `RequestInfo`. It is an implementation of variable-length array of type `Parameter`. The length of `ParameterList` is available at run-time.

For more information, go to [“virtual Dynamic::ParameterList* arguments\(\) = 0;” on page 228](#).

Include file

Include the `Dynamic_c.hh` file when you use this class.

PolicyFactory

```
class PortableInterface::PolicyFactory
```

A portable ORB service implementation registers an instance of the `PolicyFactory` interface during ORB initialization. The POA is required to preserve any policy which is registered with `ORBInitInfo` in this manner.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

PolicyFactory Method

```
virtual CORBA::Policy_ptr create_policy(CORBA::ULong
    _type, const CORBA::Any& _value) = 0;
```

The ORB calls `create_policy()` on a registered `PolicyFactory` instance when `CORBA::ORB::create_policy()` is called for the `PolicyType` under which the `PolicyFactory` has been registered. The `create_policy()` method then returns an instance of the appropriate interface derived from `CORBA::Policy` whose value corresponds to the specified `CORBA::Any`. If it cannot, it will raise an exception as described for `CORBA::ORB::create_policy()`.

Parameter	Description
<code>_type</code>	A <code>CORBA::PolicyType</code> specifying the type of policy being created.
<code>_value</code>	An <code>CORBA::Any</code> containing data with which to construct the <code>CORBA::Policy</code> .

RequestInfo

```
class PortableInterceptor: RequestInfo
```

This is the base class from which `ClientRequestInfo` and `ServerRequestInfo` are derived. Each interception point is given an object through which the `Interceptor` can access request information. client side and server side interception points are concerned with different information, so there are two information objects: `ClientRequestInfo` is passed to the client side interception points and `ServerRequestInfo` is passed to the server side interception points. But there is information that is common to both, so they both inherit from this common interface: `RequestInfo`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

RequestInfo methods

```
virtual CORBA::ULong request_id() = 0;
```

This method returns the ID which uniquely identifies an active request / reply sequence. Once a request / reply sequence is concluded this ID may be reused.

Note

This ID is not the same as the GIOP `request_id`. If GIOP is the transport mechanism used, then these IDs may very well be the same, but this is not guaranteed nor required.

```
virtual char* operation() = 0;
```

This method returns name of the operation being invoked.

```
virtual Dynamic::ParameterList* arguments() = 0;
```

This method returns a `Dynamic::ParameterList` containing the arguments on the operation being invoked. If there are no arguments, this attribute will be a zero length sequence.

```
virtual Dynamic::ExceptionList* exceptions() = 0;
```

This method returns a `Dynamic::ExceptionList` describing the `TypeCodes` of the user exceptions that this operation invocation may raise. If there are no user exceptions, this attribute will be a zero length sequence.

```
virtual CORBA::StringSequence* contexts() = 0;
```

This method returns a `CORBA::StringSequence` describing the contexts that may be passed on this operation invocation. If there are no contexts, this attribute will be a zero length sequence.

```
virtual CORBA::StringSequence* operation_context() = 0;
```

This method returns a `CORBA::StringSequence` containing the contexts being sent on the request.

```
virtual CORBA::Any* result() = 0;
```

This method returns the data, in the form of `CORBA::Any`, that contains the result of the operation invocation. If the operation return type is void, this attribute will be a `CORBA::Any` containing a type code with a `TCKind` value of `tk_void` and no value.

```
virtual CORBA::Boolean response_expected() = 0;
```

This method returns a boolean value which indicates whether a response is expected.

On the client, a reply is not returned when `response_expected()` is false, so `receive_reply()` cannot be called. `receive_other()` is called unless an exception occurs, in which case `receive_exception()` is called.

```
virtual CORBA::Short sync_scope() = 0;
```

This method returns an attribute, defined in the Messaging specification, is pertinent only when `response_expected()` is false. If `response_expected()` is true, the value of `sync_scope()` is undefined. It defines how far the request will progress before control is returned to the client. This attribute may have one of the following values:

- `Messaging::SYNC_NONE`
- `Messaging::SYNC_WITH_TRANSPORT`
- `Messaging::SYNC_WITH_SERVER`
- `Messaging::SYNC_WITH_TARGET`

On the server, for all scopes a reply will be created from the return of the target operation call, but the reply will not return to the client. Although it does not return to the client, it does occur, so the normal server side interception points are followed (for example, `receive_request_service_contexts()`, `receive_request()`, `send_reply()` or `send_exception()`).

For SYNC_WITH_SERVER and SYNC_WITH_TARGET, the server does send an empty reply back to the client before the target is invoked. This reply is not intercepted by server side Interceptors.

```
virtual CORBA::Short reply_status() = 0;
```

This method returns an attribute which describes the state of the result of the operation invocation. Its value can be one of the following:

- PortableInterceptor::SUCCESSFUL = 0
- PortableInterceptor::SYSTEM_EXCEPTION = 1
- PortableInterceptor::USER_EXCEPTION = 2
- PortableInterceptor::LOCATION_FORWARD = 3
- PortableInterceptor::TRANSPORT_RETRY = 4

On the client:

- Within the receive_reply interception point, this attribute will only be SUCCESSFUL.
- Within the receive_exception interception point, this attribute will be either SYSTEM_EXCEPTION or USER_EXCEPTION.
- Within the receive_other interception point, this attribute will be any of: SUCCESSFUL, LOCATION_FORWARD, or TRANSPORT_RETRY. SUCCESSFUL means an asynchronous request returned successfully. LOCATION_FORWARD means that a reply came back with LOCATION_FORWARD as its status. TRANSPORT_RETRY means that the transport mechanism indicated a retry - a GIOP reply with a status of NEEDS_ADDRESSING_MODE, for instance.

On the server:

- Within the send_reply interception point, this attribute will only be SUCCESSFUL.
- Within the send_exception interception point, this attribute will be either SYSTEM_EXCEPTION or USER_EXCEPTION.
- Within the send_other interception point, this attribute will be any of: SUCCESSFUL, or LOCATION_FORWARD. SUCCESSFUL means an asynchronous request returned successfully. LOCATION_FORWARD means that a reply came back with LOCATION_FORWARD as its status.

```
virtual CORBA::Object_ptr forward_reference() = 0;
```

If the reply_status() returns LOCATION_FORWARD, then this method returns an object to which the request will be forwarded. It is indeterminate whether a forwarded request will actually occur.

```
virtual CORBA::Any* get_slot(CORBA::ULong _id) = 0;
```

This method returns the data, in the form of a CORBA::Any, from the given slot of the PortableInterceptor::Current that is in the scope of the request.

If the given slot has not been set, then a CORBA::Any containing a type code with a TCKind value of tk_null is returned.

If the ID does not define an allocated slot, InvalidSlot is raised.

Go to [“Current” on page 215](#) for an explanation of slots and the `PortableInterceptor::Current`.

Parameter	Description
<code>_id</code>	SlotId of the slot which is to be returned.

```
virtual IOP::ServiceContext*
    get_request_service_context (CORBA::ULong _id) = 0;
```

This method returns a copy of the service context with the given ID that is associated with the request.

If the request's service context does not contain an entry for that ID, `BAD_PARAM` with a standard minor code of 26 is raised.

Parameter	Description
<code>_id</code>	<code>IOP::ServiceContext</code> of the slot which is to be returned.

```
virtual IOP::ServiceContext*
    get_reply_service_context (CORBA::ULong _id) = 0;
```

This method returns a copy of the service context with the given ID that is associated with the reply.

If the request's service context does not contain an entry for that ID, `BAD_PARAM` with a standard minor code of 26 is raised.

Parameter	Description
<code>_id</code>	<code>IOP::ServiceContext</code> of the slot which is to be returned.

ServerRequestInfo

```
class PortableInterceptor::ServerRequestInfo : public
    virtual RequestInfo
```

This class is derived from `RequestInfo`. It is passed to server side interception points.

Some methods on `ServerRequestInfo` are not valid at all interception points. The table below shows the validity of each attribute or method. If it is not valid, attempting to access it will result in a `BAD_INV_ORDER` being raised with a standard minor code of 14.

	receive_request_service_contexts	receive_request	send_reply	send_exception	send_other
<code>request_id</code>	yes	yes	yes	yes	yes
<code>operation</code>	yes	yes	yes	yes	yes
<code>arguments</code>	no	yes ¹	yes	no ²	no ²
<code>exceptions</code>	no	yes	yes	yes	yes
<code>contexts</code>	no	yes	yes	yes	yes
<code>operation_context</code>	no	yes	yes	no	no
<code>result</code>	no	no	yes	no	no
<code>response_expected</code>	yes	yes	yes	yes	yes
<code>sync_scope</code>	yes	yes	yes	yes	yes

	receive_request_service_contexts	receive_request	send_reply	send_exception	send_other
reply_status	no	no	yes	yes	yes
forward_reference	no	no	no	no	yes ²
get_slot	yes	yes	yes	yes	yes
get_request_service_context	yes	yes	yes	yes	yes
get_reply_service_context	no	no	yes	yes	yes
sending_exception	no	no	no	yes	no
object_id	no	yes	yes	yes ³	yes ³
adapter_id	no	yes	yes	yes ³	yes ³
server_id	no	yes	yes	yes	yes
orb_id	no	yes	yes	yes	yes
adapter_name	no	yes	yes	yes	yes
target_most_derived_interface	no	yes	no ⁴	no ⁴	no ⁴
get_server_policy	yes	yes	yes	yes	yes
set_slot	yes	yes	yes	yes	yes
target_is_a	no	yes	no ⁴	no ⁴	no ⁴
add_reply_service_context	yes	yes	yes	yes	

¹When `ServerRequestInfo` is passed to `receive_request()`, there is an entry in the list for every argument, whether in, inout, or out. But only the in and inout arguments will be available.

²If the `reply_status()` does not return `LOCATION_FORWARD`, accessing this attribute will raise `BAD_INV_ORDER` with a standard minor code of 14.

³If the servant locator caused a location forward, or raised an exception, this attribute / method may not be available in this interception point. `NO_RESOURCES` with a standard minor code of 1 will be raised if it is not available.

⁴The method is not available in this interception point because the necessary information requires access to the target object's servant, which may no longer be available to the ORB. For example, if the object's adapter is a POA that uses a `ServantLocator`, then the ORB invokes the interception point after it calls `ServantLocator::postinvoke()`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

ServerRequestInfo methods

```
virtual CORBA::Any* sending_exception() = 0;
```

This method returns data, in the form `CORBA::Any`, that contains the exception to be returned to the client.

If the exception is a user exception which cannot be inserted into a `CORBA::Any` (e.g., it is unknown or the bindings don't provide the `TypeCode`), then this attribute will be an `CORBA::Any` containing the system exception `UNKNOWN` with a standard minor code of 1.

```
virtual char* server_id() = 0;
```

This method returns the value that was passed into the ORB::init call using the -ORBServerId argument when the ORB was created.

```
virtual char* orb_id() = 0;
```

The method returns the value that was passed into the ORB::init() call.

In Java, this is accomplished using the -ORBid argument in the ORB.init call that created the ORB containing the object adapter that created this template. What happens if the same ORBid is used on multiple ORB::init() calls in the same server is currently undefined.

```
virtual CORBA::StringSequence* adapter_name() = 0;
```

The method returns the name for the object adapter, in the form of CORBA::StringSequence, that services requests for the invoked object. In the case of the POA, the adapter_name is the sequence of names from the root POA to the POA that services the request. The root POA is not named in this sequence.

```
virtual CORBA::OctetSequence* object_id() = 0;
```

This method returns the opaque object_id, in the form of CORBA::OctetSequence, that describes the target of the operation invocation.

```
virtual CORBA::OctetSequence* adapter_id() = 0;
```

This method returns opaque identifier for the object adapter, in the form of CORBA::OctetSequence.

```
virtual char* target_most_derived_interface() = 0;
```

This method returns the RepositoryID for the most derived interface of the servant.

```
virtual CORBA::Policy_ptr  
  get_server_policy(CORBA::ULong _type) = 0;
```

This method returns the policy in effect for this operation for the given policy type. The returned CORBA::Policy object will only be a policy whose type was registered via register_policy_factory().

If a policy for the given type was not registered via register_policy_factory, this method will raise INV_POLICY with a standard minor code of 3.

Parameter	Description
<code>_type</code>	The CORBA::PolicyType which specifies the policy to be returned.

```
virtual void set_slot(CORBA::ULong _id, const  
  CORBA::Any& _data) = 0;
```

This method allows an Interceptor to set a slot in the PortableInterceptor::Current that is in the scope of the request. If data already exists in that slot, it will be overwritten.

If the ID does not define an allocated slot, InvalidSlot is raised.

Go to [“Current” on page 215](#) for an explanation of slots and `PortableInterceptor::Current`.

Parameter	Description
<code>_id</code>	The <code>SlotId</code> of the slot.
<code>_data</code>	The data, in the form of a <code>CORBA::Any</code> , to store in that slot.

```
virtual CORBA::Boolean target_is_a(const char* _id) = 0;
```

This method returns true if the servant is the given `RepositoryId`, false if it is not.

Parameter	Description
<code>_id</code>	The caller wants to know if the servant is this <code>CORBA::RepositoryId</code> .

```
virtual void add_reply_service_context(const IOP::ServiceContext& _service_context, CORBA::Boolean _replace) = 0;
```

This method allows Interceptors to add service contexts to the request.

There is no declaration of the order of the service contexts. They may or may not appear in the order that they are added.

Parameter	Description
<code>_service_context</code>	The <code>IOP::ServiceContext</code> to add to the reply.
<code>_replace</code>	Indicates the behavior of this method when a service context already exists with the given ID. If false, then <code>BAD_INV_ORDER</code> with a standard minor code of 15 is raised. If true, then the existing service context is replaced by the new one.

ServerRequestInterceptor

```
class PortableInterceptor::ServerRequestInterceptor : public virtual Interceptor
```

This `ServerRequestInterceptor` class is used to derive user-defined server side interceptor. A `ServerRequestInterceptor` instance is registered with the ORB (go to [“ORBInitializer” on page 222](#) for more information).

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

ServerRequestInterceptor methods

```
virtual void receive_request_service_contexts(ServerRequestInfo_ptr _ri) = 0;
```

At this `receive_request_service_contexts()` interception point, Interceptors must get their service context information from the incoming request and transfer it to `PortableInterceptor::Current`'s slots.

This interception point is called before the servant manager is called. Operation parameters are not yet available at this point. This interception point may or may not execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' `receive_request_service_contexts()` interception points are called. Those Interceptors on the Flow Stack are popped and their `send_exception()` interception points are called.

This interception point may also raise a `ForwardRequest` exception (go to [“ForwardRequest” on page 217](#) for more information). If an Interceptor raises this exception, no other Interceptors' `receive_request_service_contexts()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_other` interception points are called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void receive_request(ServerRequestInfo_ptr _ri)  
    = 0;
```

This `receive_request()` interception point allows an Interceptor to query request information after all the information, including method parameters, are available. This interception point will execute in the same thread as the target invocation.

In the DSI model, since the parameters are first available when the user code calls `arguments()`, `receive_request()` is called from within `arguments()`. It is possible that `arguments()` is not called in the DSI model. The target may call `set_exception()` before calling `arguments()`. The ORB will guarantee that `receive_request()` is called once, either through `arguments()` or through `set_exception()`. If it is called through `set_exception()`, requesting the `arguments()` will result in `NO_RESOURCES` being raised with a standard minor code of 1.

This interception point may raise a system exception. If it does, no other Interceptors' `receive_request()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_exception` interception points are called.

This interception point may also raise a `ForwardRequest` exception (go to [“ForwardRequest” on page 217](#) for more information). If an Interceptor raises this exception, no other Interceptors' `receive_request()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_other()` interception points are called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void send_reply(ServerRequestInfo_ptr _ri) = 0;
```

This `send_reply()` interception point allows an Interceptor to query reply information and modify the reply service context after the target operation has been invoked and before the reply is returned to the client. This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' `send_reply()` interception points are called. The remaining

Interceptors in the Flow Stack will have their `send_exception()` interception point called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void send_exception(ServerRequestInfo_ptr _ri) = 0;
```

This `send_exception()` interception point is called when an exception occurs. It allows an Interceptor to query the exception information and modify the reply service context before the exception is raised to the client. This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. This has the effect of changing the exception which successive Interceptors popped from the Flow Stack receive on their calls to `send_exception`. The exception raised to the client will be the last exception raised by an Interceptor, or the original exception if no Interceptor changes the exception.

This interception point may also raise a `ForwardRequest` exception (go to [“ForwardRequest” on page 217](#) for more information). If an Interceptor raises this exception, no other Interceptors' `send_exception()` interception points are called. The remaining Interceptors in the Flow Stack will have their `send_other` interception points called.

```
virtual void send_other(ServerRequestInfo_ptr _ri) = 0;
```

This `send_other()` interception point allows an Interceptor to query the information available when a request results in something other than a normal reply or an exception. For example, a request could result in a retry (e.g., a GIOP Reply with a `LOCATION_FORWARD` status was received). This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' `send_other()` methods are called. The remaining Interceptors in the Flow Stack will have their `send_exception` interception points called.

This interception point may also raise a `ForwardRequest` exception.

VisiBroker Interceptor and object wrapper interfaces and classes for C++

This section describes the interfaces and classes that you can use with *VisiBroker interceptors* and *object wrappers*.

For more information, see “Using VisiBroker Interceptors” and “Using Object Wrappers” in the *VisiBroker for C++ Developer's Guide*.

Introduction

Similar to Portable Interceptors, VisiBroker interceptors offer the VisiBroker ORB services a mechanism to intercept normal flow of execution of the ORB. The table below lists the three forms of VisiBroker interceptor.

Interceptor Type	Description
Client Interceptor	System level interceptors which can be used to hook ORB services such as transactions and security into the client ORB processing.
Server Interceptor	System level interceptors which can be used to hook ORB services such as transactions and security into the server ORB processing.
Object Wrappers	User level interceptors which provide a simple mechanism for users to intercept calls to stubs and skeletons. These allow for simple tracing and data caching among other things.

InterceptorManagers

Interceptors are installed and managed via interceptor managers. The `InterceptorManager` interface is the generic interceptor manager from which all interceptor-specific managers inherit. An `InterceptorManager` type is associated with each interceptor type. An `InterceptorManager` holds a list or chain of a particular kind of interceptors, all of which have the same scope and need to start at the same time. Therefore, global interceptors, such as `POALifeCycle` and `Bind` have global `InterceptorManagers` while scoped interceptors, per-POA and per-object, have an `InterceptorManager` for each scope. Each scope, either global, POAs, or objects, may hold multiple types of interceptors. You get the right kind of manager for a particular interceptor from an `InterceptorManagerControl`.

Global interceptors may be handed additional interceptor managers to install localized interceptors, for example, per-POA interceptors use the `POAInterceptorManager`.

To obtain an instance of the global interceptor manager, `InterceptorManager`, call `ORB.resolve_initial_references` and pass the `String` `InterceptorManager` as an argument. This value is only available when the ORB is in administrative mode, that is, during ORB initialization. It can only be used to install global interceptors such as, `POALifeCycle` interceptors or `Bind` interceptors.

The POA interceptor manager is a per-POA manager and is only available to POALifeCycleInterceptors during their create call. POALifeCycleInterceptors may set up all other server side interceptors during the call to create. The Bind Interceptor Manager is a per-object manager and is only available to Bind interceptors during their bind_succeeded() call. Bind interceptors may set up ClientRequest interceptors during the bind_succeeded call.

IOR templates

In addition to the interceptor, the Interoperable Object Reference (IOR) template may be modified directly on the POAInterceptorManager interface during the call to POALifeCycleInterceptor::create(). The IOR template is a full IOR value with the type_id not set, and all GIOP::ProfileBodyValues have incomplete object keys. The POA sets the type_id and fills in the object keys of the template before calling the IORCreationInterceptors.

InterceptorManager

```
class Interceptor::InterceptorManager
```

This is the base class from which all interceptor managers are derived. Interceptor managers are interfaces which are used to manage the installation and removal of interceptors from the system.

InterceptorManagerControl

```
class Interceptor::InterceptorManagerControl public  
CORBA::PseudoObject
```

This is the class that is responsible for controlling a set of related interceptor managers. It holds all available managers identified by a string that corresponds to the type of interceptors to be managed. There is one InterceptorManagerControl per scope.

Include file

Include the `interceptor_c.hh` file when you use this class.

InterceptorManagerInterceptor method

```
InterceptorManager_ptr get_manager(const char name);
```

This method returns an instance of the InterceptorManager which returns a string identifying the manager.

Parameter	Description
name	The name of the interceptor.

BindInterceptor

```
class Interceptor::BindInterceptor public
    VISPPseudoInterface
```

You can use this class to derive your own interceptor for handling bind and rebind events for a client or server application. The Bind Interceptors are global interceptors invoked on the client side before and after binds.

If an exception is thrown during a bind, the remaining interceptors in the chain are not called and the chain is truncated to only those interceptors already called. Exceptions thrown during `bind_succeeded` or `bind_failed` are ignored.

Include file

You should include the `interceptor_c.hh` file when you use this class.

BindInterceptor methods

```
virtual IOP::IORValue_ptr bind(IOP::IORValue_ptr ior,
    CORBA::Object_ptr obj, CORBA::Boolean rebind,
    VISPClosure& closure);
```

This method is called during all ORB bind operations.

Parameter	Description
<code>ior</code>	The Interoperable Object Reference (IOR) for the server object to which the client is binding.
<code>obj</code>	The client object which is being bound to the server. The object will not be properly initialized at this time, so do not attempt an operation on it. However, it may be stored in a data structure and used after the bind has completed.
<code>rebind</code>	An attempt to rebind to the server. After a <code>bind()</code> has failed, depending on the current quality of service, a rebind may be attempted.
<code>closure</code>	A new closure object for the bind operation. The closure will be used in corresponding calls to either <code>bind_failure</code> or <code>bind_succeeded</code> .
<code>return</code>	Returns a new IOR, if the bind operation is to be continued using this new IOR. Otherwise, it returns a null value and the bind will proceed using the original IOR. Returning the same IOR as the parameter passed in is incorrect and generates an exception at bind time.

```
virtual IOP::IORValue_ptr bind_failed(IOP::IORValue_ptr
    ior, CORBA::Object_ptr obj, VISPClosure& closure);
```

This method is called if a bind operation failed.

Parameter	Description
<code>ior</code>	The IOR of the server object on which the bind operation failed.
<code>obj</code>	The client object which is being bound to the server.

Parameter	Description
closure	The closure object previously given in the bind call.
return	Returns a new IOR if a rebind is to be attempted against this IOR. Otherwise, it returns null, and a rebind is not attempted.

```
virtual void bind_succeeded(IOP::IORValue_ptr ior,
    CORBA::Object_ptr obj, CORBA::Long profileIndex,
    InterceptorManagerControl_ptr interceptorControl,
    VISClosure& closure);
```

This method is called if a bind operation succeeded.

Parameter	Description
ior	The IOR of the server object on which the bind operation succeeded.
obj	The client object which is being bound to the server.
profileIndex	Identifies the connection protocol.
interceptorControl	This Manager provides a list of the types of Managers.
closure	The closure object previously given in the bind call.

BindInterceptorManager

```
class Interceptor::BindInterceptorManager public
    InterceptorManager, public VISpseudoInterface
```

This is the class that manages all the global bind interceptors. It only has one public method, which allows you to register interceptors.

The BindInterceptorManager must always be used at ORB_init(). It has no effect after the orb is initialized. Therefore, it only needs to be used in the context of a loader class that inherits from VISinit.

To obtain a BindInterceptorManager from the InterceptorManagerControl, use InterceptorManagerControl::get_manager() with the identification string Bind.

Include file

You should include the interceptor_c.hh file when you use this class.

BindInterceptorManager method

```
void add (BindInterceptor_ptr interceptor)
```

This method is used to add a BindInterceptor to the list of interceptors to be started at bind time.

ClientRequestInterceptor

```
class Interceptor::ClientRequestInterceptor public  
    VISPPseudoInterface
```

You use this class to derive your own client side interceptor. The Client Request interceptors may be installed during the `bind_succeeded` call of a bind interceptor and remain active for the duration of the connection. The methods defined in your derived class will be invoked by the ORB during the preparation or sending of an operation request, during the receipt of a reply message, or if an exception is raised.

Include file

Include the `interceptor_c.hh` file when you use this class.

ClientRequestInterceptor methods

```
virtual void preinvoke_premarshal (CORBA::Object_ptr  
    target, const char* operation,  
    IOP::ServiceContextList& service_contexts,  
    VisClosure& closure);
```

This method is invoked by the ORB on every request, before the request has been marshaled. An exception thrown from this interceptor results in the request being completed immediately. In this case, the chain is shortened to only those interceptors that have already fired, the request will not be sent, and `exception_occurred()` is called on all interceptors still in the chain.

Parameter	Description
<code>target</code>	The client object which is being bound to the server.
<code>operation</code>	The name of the operation being invoked.
<code>service_context</code>	The services assigned by the ORB. These services are identified by a tag registered with the OMG.
<code>closure</code>	The closure object previously given in the bind call.

```
virtual void preinvoke_postmarshal (CORBA::Object_ptr  
    target, CORBA_MarshallOutBuffet& payload, VISClosure&  
    closure);
```

This method is invoked after every request has been marshaled, but before it was sent.

If an exception is thrown in this method:

- the rest of the chain is not invoked,
- the request is not sent to the server, and
- `exception_occurred()` is called on the whole interceptor chain.

Parameter	Description
<code>target</code>	The client object which is being bound to the server.
<code>payload</code>	Marshaled buffer.
<code>closure</code>	The closure object previously given in the bind call.

```
virtual void postinvoke(CORBA::Object_ptr target,
    const IOP::ServiceContextList& Service_contexts,
    CORBA_MarshallInBuffet& payload,
    CORBA::Environment_ptr env, VISClosure& closure);
```

This method is invoked after a request completes correctly or by throwing an exception. It is called after the `ServantLocator` has been invoked. Should an interceptor in the chain throw an exception, that interceptor also calls `exceptionoccurred()` and all remaining interceptors in the chain call `exception()` instead of calling `postinvoke()`.

The `CORBA::Environment` parameter is changed to reflect this exception, even when a two-way call had already written an exception in that argument.

Parameter	Description
target	The client object which is being bound to the server.
service_context	The client object which is being bound to the server. Service context length is 0 for one-way calls and during exception.
payload	Marshaled buffer.
env	Contains information on the exception that was raised.
closure	The closure object previously given in the bind call.

```
virtual void exception_occurred(CORBA::Object_ptr
    target, CORBA::Environment_ptr env, VISClosure&
    closure);
```

This method is invoked by the ORB when an exception is thrown before the invocation. All exceptions thrown after the invocation are gathered in the environment parameter of the `postinvoke` method.

Parameter	Description
target	The client object which is being bound to the server.
env	Contains information on the exception that was raised.
closure	The closure object previously given in the bind call.

ClientRequestInterceptorManager

```
class Interceptor::ClientRequestInterceptorManager :
    public InterceptorManager, public VISpseudoInterface
```

This is the class that holds the chain of `ClientRequestInterceptors` for the current object.

A `ClientRequestInterceptorManager` should be used inside of the `BindInterceptor::bind_succeeded()` method within the scope set by the `InteceptorManagerControl` passed as an argument to `bind_succeeded()`.

Include file

Include the `interceptor_c.hh` when you use this class.

ClientRequestInterceptorManager methods

```
virtual void add (ClientRequestInterceptor_ptr  
    interceptor);
```

This method may be invoked to add a ClientRequestInterceptor to the local chain.

```
virtual void remove (ClientRequestInterceptor_ptr  
    interceptor);
```

This method removes a ClientRequestInterceptorManager.

POALifeCycle Interceptor

```
class InterceptorManager:POALifeCycleletInterceptor  
    public VISIPseudoInterface
```

The POALifeCycleInterceptor is a global interceptor which is invoked every time a POA is created or destroyed. All other server side interceptors may be installed either as global interceptors or for specific POAs. You install the POALifeCycleInterceptor through the POALifeCycleInterceptorManager interface. Go to ["POALifeCycleInterceptorManager" on page 244](#) for more information. The POALifeCycleInterceptor is called during POA creation and destruction.

Include file

Include the PortableServerExt_c.hh file when you use this class.

POALifeCycleInterceptor methods

```
virtual void create (PortableServer::POA_ptr poa,  
    CORBA::PolicyList& policies IOP::IORValue*&  
    iorTemplate,  
    interceptor::InterceptorManagerControl_ptr poaAdmin);
```

This method is invoked when a new POA is created either explicitly through a call to create_POA or via AdapterActivator. With AdapterActivator, the interceptor is called only after the unknown_adapter method successfully returns from the AdapterActivator. The create method is passed as a reference to the recently created POA and as a reference to that POA instance's POAInterceptorManager.

Parameter	Description
poa	The ID associated with the current POA being created.
policies	The policies for the POA being created.
iorTemplate	The IOR template is a full IOR value with the type_id not set, and all GIOP::ProfileBodyValues will have incomplete object keys.
poaAdmin	The control for the POA being created. Go to "InterceptorManagerControl" on page 238 for more information.

```
virtual void destroy(PortalServer::POA_ptr poa);
```

This method is called before a POA is destroyed and all of its objects have been etherialized. It guarantees that `destroy` will be called on all interceptors before `create` will be called again for a POA with the same name. If the `destroy` operation throws a system exception, the exception is ignored, and the remaining interceptors are called.

Parameter	Description
<code>poa</code>	Portable Object Adapter (POA) being destroyed.

POALifeCycleInterceptorManager

```
class InterceptorExt::POALifeCycleInterceptorManager
public InterceptorManager, public
VISPPseudoInterface
```

This class manages all `POALifeCycle` global interceptors. There is a single instance of the `POALifeCycleInterceptorManager` defined in an ORB.

Then scope of this interface is global, per-ORB. This class is only active during `ORB_init()` time.

Include file

Include the `PortalServerExt_c.hh` file when you use this class.

POALifeCycleInterceptorManager method

```
virtual void add(POALifeCycleInterceptor_ptr
interceptor);
```

This method may be invoked to add a `POALifeCycleInterceptor` to the global chain of `POALifeCycle` interceptors.

Parameter	Description
<code>interceptor</code>	The interceptor to be added.

ActiveObjectLifeCycleInterceptor

```
class
PortableServerExt::ActiveObjectLifeCycleInterceptor
public VISPPseudoInterface
```

The `ActiveObjectLifeCycleInterceptor` interceptor is called when objects are added and removed from the active object map. Only used when POA has `RETAIN` policy. This class is a POA-scoped interceptor which may be installed by a `POALifeCycleInterceptor` when the POA is created.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

ActiveObjectLifeCycleInterceptor methods

```
virtual void create(const PortableServer::ObjectId&
    oid, PortableServer::ServantBase* servant,
    PortableServer::POA_ptr adapter);
```

This method is invoked after an object has been added to the Active Object Map, either through explicit or implicit activation, using either direct APIs or a ServantActivator. The object reference and the POA of the new active object are passed as parameters.

Parameter	Description
oid	Object ID for the object currently activated.
servant	Associated servant
adapter	The Portable Object Adapter (POA) being created or destroyed.

```
virtual void destroy(const PortableServer::ObjectId&
    oid, PortableServer::ServantBase* servant,
    PortableServer::POA_ptr adapter);
```

This method is called after an object has been deactivated and etherialized. The object reference and the POA of the object are passed as parameters.

Parameter	Description
oid	Object ID for the object currently activated
servant	Associated servant
adapter	The Portable Object Adapter (POA) being created or destroyed.

ActiveObjectLifeCycleInterceptorManager

```
class
    PortableServerExt::ActiveObjectLifeCycleInterceptorMa
        nager public interceptor::InterceptorManager, public
        VISPPseudoInterface
```

This is the class that manages all ActiveObjectLifeCycleInterceptors registered in its scope. Each POA has one single ActiveObjectLifeCycleInterceptorManager.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

ActiveObjectLifeCycleInterceptorManager method

```
virtual void add(ActiveObjectLifeCycleInterceptor
    interceptor_ptr interceptor);
```

This method may be invoked to add an ActiveObjectLifeCycleInterceptor to the chain.

ServerRequestInterceptor

```
class Interceptor::ServerRequestInterceptor public
    VISPPseudoInterface
```

The `ServerRequestInterceptor` class is a POA-scoped interceptor which may be installed by a `POALifeCycleInterceptor` at POA creation time. This class may be used to perform access control, to examine and insert service contexts, and to change the reply status of a request.

Include file

Include the `interceptor_c.hh` file when you use this class.

ServerRequestInterceptor methods

```
virtual void preinvoke(CORBA::Object_ptr _target, const
    char* operation,
    const IOP::ServiceContextList& service_contexts,
    CORBA::MarshalInBuffer& payload, VISPClosure& closure)
    raises(ForwardRequestException);
```

This method is invoked by the ORB on every request, before the request is demarshaled. An exception thrown from this interceptor results in the request being completed immediately. This method is called before any `ServantLocators` are invoked. The result may be that the servant may not be available while this method is running.

Parameter	Description
<code>target</code>	The client object which is being bound to the server.
<code>operation</code>	Identifies the name of the operation being invoked.
<code>service_contexts</code>	Identifies the services assigned by the Orb. These services are registered with the OMG.
<code>payload</code>	Marshaled buffer.
<code>closure</code>	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void postinvoke_premarshal(CORBA::Object_ptr
    target, IOP::ServiceContextList&
    ServiceContextList, CORBA::Environment_ptr env,
    VISPClosure& closure);
```

This method is invoked after an upcall to the servant but before marshaling the reply. An exception here is handled by interrupting the chain: the request is not sent to the server and `exceptionoccurred()` is called on all interceptors in the chain

Parameter	Description
<code>target</code>	The client object which is being bound to the server.
<code>ServiceContextList</code>	Identifies the services assigned by the Orb. These services are registered with the OMG.
<code>env</code>	Contains information on the exception that was raised.
<code>closure</code>	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void postinvoke_postmarshal(CORBA::Object_ptr
    _target, CORBA::MarshalOutBuffer& _payload,
    VISClosure& _closure);
```

This method is invoked after marshaling the reply but before sending the reply to the client. Exceptions thrown here are ignored. The entire chain is guaranteed to be called.

Parameter	Description
target	The object to which that application was attempting to bind.
payload	Marshaled buffer.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void exception_occurred(CORBA::Object_ptr
    _target, CORBA::Environment_ptr _env, VISClosure&
    _closure);
```

This method is invoked by the ORB when an exception occurred interceptor is called on all remaining interceptors in the chain after an exception occurred in one of the prepare_reply interceptors. An exception thrown during this call replaces the existing exception in the environment

Parameter	Description
target	The client object which is being bound to the server.
env	Contains information on the exception that was raised.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

ServerRequestInterceptorManager

```
class Interceptor::ServerRequestInterceptorManager
    public InterceptorManager, public VISpseudoInterface
```

This is the class that manages all ServerRequestInterceptors registered in its scope. Each POA has one single ServerRequestInterceptorManager.

Include file

Include the `interceptor_c.hh` file when you use this class.

ServerRequestInterceptorManager method

```
virtual void add(ServerRequestInterceptor_ptr
    interceptor);
```

Invoke this method to add a ServerRequestInterceptor to the chain.

IORCreationInterceptor

```
class PortableServerExt::IORInterceptor public
    VISpseudoInterface
```

The IORCreationInterceptor is a per-POA interceptor which may be installed by a POALifeCycleInterceptor at POA creation time. The

interceptor may be used to modify IORs by adding additional profiles or components. This class is typically used to support services such as transactions or firewall.

This kind of interceptor is used to automatically change the IOR templates on certain classes of POAs whose names and identities may not be known at development time. This may be the case with services such as Transaction and Firewall.

Note

To change all the IORs created by a POA, simply modify the IORTemplate for that POA. The change will apply only to newly created IORs and not to any existing ones.

Making radical changes to the IOR is not recommended.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

IORInterceptor method

```
virtual void create(PortableServer::POA poa,  
                   IOP::IORValue*& ior);
```

The method is called whenever the POA needs to create an object reference. It takes the POA and the IORValue for the reference as arguments. The interceptor may modify the IORValue by adding additional profiles or components, or changing the existing profiles or components.

Parameter	Description
<code>poa</code>	The ID associated with the current PAO being created.
<code>ior</code>	The IOR for the server object to which the client is binding.

IORCreationInterceptorManager

```
class PortableServerExt::IORCreationInterceptorManager  
public interceptor::InterceptorManager, public  
VISPPseudoInterface
```

This is the class that is used to manage (add) IOR interceptors to the local chain. Each POA has one single IORInterceptorManager.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

IORCreationInterceptorManager method

```
virtual void add(IORCreationInterceptor_ptr  
                _interceptor);
```

This method may be invoked to add an IORInterceptor to the local chain.

VISClosure

```
struct VISClosure
```

This structure is used to store data so that it can be shared between different invocations of interceptor methods. The data that is stored is un-typed and can represent state information related to an operation request or a bind or locate request. It is used in conjunction with the `VISClosureData` class.

Include file

Include the `vclosure.h` file when you use this class.

VISClosure members

```
CORBA::ULong id
```

You can use this data member to uniquely identify this object if you are using more than one `VISClosure` object.

```
void *data
```

This data member points to the un-typed data that may be stored or accessed by an interceptor method.

```
VISClosureData *managedData
```

This data member points to the `VISClosureData` class that represents the actual data. You may cast your managed data to this type.

VisExtendedClosure

```
class VISExtendedClosure : public VISClosure {
public:
    interceptor::RequestInfo reqInfo;
    CORBA::MarshalInBuffer_ptr payload;
};
```

This interface is a derived class of `VISClosure` and contains a `RequestInfo` for read only attribute.

Code sample

This sample shows the `RequestInfo` IDL.

```
struct RequestInfo {
    CORBA::Boolean response_expected;
    CORBA::ULong request_id;
};
```

You can cast the `VISClosure` object passed to the `ServerRequestInterceptor` and `ClientRequestInterceptor` to its subclass, `VISExtendedClosure`. `VISExtendedClosure` can be used to extract the `RequestInfo`, from which you can extract the `request_id` and `response_expected`. The `request_id` is the unique id assigned to the request. The `response_expected` flag indicates whether the request is a one-way call.

```
CORBA::Boolean response_expected =
```

```
((VISExtendedClosure)closure).reqInfo.response_expected;  
CORBA::ULong request_id =  
((VISExtendedClosure)closure).reqInfo.request_id;
```

For more information, please see the example in `examples/interceptor/client_server`.

VISClosureData

```
class VISClosureData
```

This class represents managed data that can be shared between different invocations of interceptor methods.

VISClosureData methods

```
virtual void _VisClosureData();
```

This is the default destructor.

```
virtual void _release();
```

Releases this object and decrements the reference count. When the reference count reaches 0, the object is deleted.

ChainUntypedObjectWrapperFactory

```
class  
VISObjectWrapper: ChainUntypedObjectWrapperFactory:  
public UntypedObjectWrapperFactory
```

This interface is used by a client or server application to add or remove an `UntypedObjectWrapperFactory` object. An `UntypedObjectWrapperFactory` is used to create an `UntypedObjectWrapper` for each object a client application binds to or for each object implementation created by a server application.

See "Using object wrappers" in the *VisiBroker C++ Developer's Guide* for more information about how to use the object wrappers.

Include file

Include the `vobjwrap.h` file when you use this class.

ChainUntypedObjectWrapperFactory methods

```
void add(UntypedObjectWrapperFactory_ptr  
factory, Location loc);
```

This method adds the specified un-typed object wrapper factory for a client application, server application, or collocated application.

If your application is acting as both a client application and a server application, that is, a collocated application, you can install an un-typed object wrapper factory. If you do so, the wrapper's methods are invoked for both invocations on bound objects and operation requests received by object implementations. In other words, they are invoked on both the client and server portions of the application.

Note

On the client side, un-typed object wrapper factories must be defined before any objects are bound. On the server side, un-typed object wrapper factories must be defined before an invocation for an object implementation is received.

Parameter	Description
factory	A pointer to the factory to be registered.
loc	The location of the factory being added, which should be one of the following values: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

```
void remove(UntypedObjectWrapperFactory_ptr factory,  
             Location loc);
```

This method removes the specified un-typed object wrapper factory from the specified location.

If your application is acting as both a client and a server, you can remove the object wrapper factories for either the client side objects, server side implementations, or both.

Note

Removing one or more object wrapper factories from a client does not affect objects of that class which are already bound by the client. Only subsequently bound objects will be affected.

Removing object wrapper factories from a server does not affect object implementations that have already serviced requests. Only subsequently created object implementations will be affected.

Parameter	Description
factory	A pointer to the factory to be registered.
loc	The location of the factory being removed; one of the following values: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

```
static CORBA::ULong count(Location loc);
```

This static method returns the number of un-typed object wrapper factories installed for the specified location.

Parameter	Description
loc	The location of the factories: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

UntypedObjectWrapper

```
class VISObjectWrapper::UntypedObjectWrapper : public  
    VISResource
```

You use this class to derive and implement an un-typed object wrapper for a client application, a server application, or collocated application. When you derive an un-typed object wrapper from this class, you define a

`pre_method` method that is invoked before a request is issued by a client application or before it is processed by an object implementation on the server side. You also define a `post_method` method that will be invoked after an operation request is processed by an object implementation on the server side or after a reply has been received by a client application.

You must also derive a factory class that will create your un-typed wrapper objects. Derive it from the `UntypedObjectWrapperFactory` class, described in [“UntypedObjectWrapper” on page 251](#).

Refer to the *VisiBroker C++ Developer's Guide* for more information about how to use the object wrappers.

Quality of Service interfaces and classes

This section describes the VisiBroker for C++ implementation of the Quality of Service APIs. See [“Core interfaces and classes”](#) for information about creating policies.

CORBA::PolicyManager

```
class CORBA::PolicyManager
```

This class is used to set and access policy overrides at the VisiBroker ORB level. Policies defined at the VisiBroker ORB level override any system defaults. The instance belonging to the manager thread is accessible by using `resolve_initial_reference("PolicyManager")` and narrowing down to `PolicyManager`.

IDL definition

```
module CORBA {
    interface PolicyManager {
        PolicyList get_policy_overrides(in PolicyTypeSeq ts);
        void set_policy_overrides(in PolicyList policies,
            in SetOverrideType set_add)
            raises (InvalidPolicies);
    };
};
```

Include file

Include the file `corba.h` when you use this class.

Methods

```
CORBA_PolicyList* get_policy_overrides (PolicyTypeSeq
    ts);
```

This method returns a policy list containing the policies of the requested policy types. If the specified sequence is empty (that is, if the length of the list is zero), all policies at this scope are returned. If none of the requested policy types is set at the target **PolicyManager**, an empty sequence is returned.

Parameter	Description
<code>ts</code>	A sequence containing the requested policy types.

```
void set_policy_overrides (const CORBA_PolicyList&
    policies, CORBA::SetOverrideType set_add)
```

This method updates the current set of policies with the requested list of policy overrides. To remove all overrides from a `PolicyManager`, invoke `set_policy_overrides` with an empty sequence of policies and a mode of `SET_OVERRIDE`.

Only certain policies that pertain to the invocation of an operation at the client end can be overridden using this operation. An attempt to override any other policy results in the raising of the `CORBA::NO_PERMISSION` exception. If the request would put the set of overriding policies for the target `PolicyManager` in an inconsistent state, no policies are changed or added, and the exception `InvalidPolicies` is raised. There is no evaluation of compatibility with policies set within other `PolicyManagers`.

Parameter	Description
<code>policies</code>	A sequence of references to <code>Policy</code> objects.
<code>set_add</code>	Indicates whether these policies should be added (<code>ADD_OVERRIDE</code>) to any other overrides that already exist in the <code>PolicyManager</code> or added to a clean <code>PolicyManager</code> free of any other overrides (<code>SET_OVERRIDE</code>).

CORBA::PolicyCurrent

```
class CORBA::PolicyCurrent
```

This class provides access to policies overridden at the thread level and is defined with operations for querying and applying quality of service values to a thread. Policies defined at the thread level override any system defaults or values set at the VisiBroker ORB level but not those at the Object level. The instance belonging to the current thread is accessible by using `resolve_initial_reference("PolicyCurrent")` and narrowing down to `PolicyCurrent`.

IDL definition

```
interface PolicyCurrent : PolicyManager, Current {
};
```

Include file

Include the file `corba.h` when you use this class.

CORBA::Object

```
class CORBA::Object
```

The VisiBroker Edition implementation of the Quality of Service API allows policies to be assigned to objects, threads, and VisiBroker ORBs. Policies assigned to Objects override all other policies.

IDL definition

```
#pragma prefix "omg.org"
module CORBA {
    interface Object {
        Policy get_client_policy(in PolicyType type);
        Policy get_policy(in PolicyType type);
        PolicyList get_policy_overrides(in PolicyTypeSeq
types);
        Object set_policy_overrides(in PolicyList
policies,in SetOverrideType
```

```

        set_add)
        raises (InvalidPolicies);
        boolean validate_connection(out PolicyList
inconsistent_policies);
    };
};

```

Include file

Include the file `corba.h` when you use this class.

Methods

```

CORBA::Policy_ptr get_client_policy(CORBA::PolicyType
    type);

```

Returns the effective overriding Policy for the object reference. The effective override is obtained by first checking for an override of the specified `PolicyType` at the Object scope, then at the Current scope, and finally at the VisiBroker ORB scope. If no override is present for the requested `PolicyType`, the system-dependent default value for that `PolicyType` is used. Portable applications are expected to set the desired "defaults" at the VisiBroker ORB scope since default Policy values are not specified.

```

CORBA::Policy_ptr get_policy(CORBA::PolicyType type);

```

Returns the effective Policy for the object reference. The effective Policy is the one that would be used if a request were made. This Policy is determined first by obtaining the effective override for the `PolicyType` as returned by `get_client_policy`.

The effective override is then compared with the Policy as specified in the IOR. The effective Policy is the intersection of the values allowed by the effective override and the IOR-specified Policy. If the intersection is empty, the system exception `INV_POLICY` is raised. Otherwise, a Policy with a value legally within the intersection is returned as the effective Policy. The absence of a Policy value in the IOR implies that any legal value may be used. To ensure the accuracy of the returned effective Policy, invoke `non_existent` or `validate_connection` on an object reference prior to `get_policy`. If `get_policy` is invoked prior to the object reference being bound, the returned effective Policy is implementation-dependent. In that situation, a compliant implementation may do any of the following: raise the exception `CORBA::BAD_INV_ORDER`, return some value for that `PolicyType` which may be subject to change once a binding is performed, or attempt a binding and then return the effective Policy. Note that if the `RebindPolicy` has a value of `TRANSPARENT`, the effective Policy may change from invocation to invocation due to transparent rebinding.

Note

In VisiBroker, this method gets the Policy assigned to an Object, thread or the VisiBroker ORB.

```

CORBA::Object_ptr set_policy_overrides(const
    CORBA_PolicyList& _policies, CORBA::SetOverrideType
    _set_add);

```

This method works as does the `PolicyManager` method of the same name. However, this method updates the current set of policies of an Object,

thread or the VisiBroker ORB with the requested list of Policy overrides. In addition, this method returns a `CORBA::Object` whereas other methods of the same name return `void`.

```
CORBA::Boolean validate_connection(CORBA_PolicyList&
    inconsistent_policies);
```

Returns the value `TRUE` if the current effective policies for the Object will allow an invocation to be made. If the object reference is not yet bound, a binding will occur as part of this operation. If the object reference is already bound, but current policy overrides have changed or for any other reason the binding is no longer valid, a rebind will be attempted regardless of the setting of any `RebindPolicy` override. The `validate_connection` operation is the only way to force such a rebind when implicit rebinds are disallowed by the current effective `RebindPolicy`. The attempt to bind or rebind may involve processing `GIOP LocateRequests` by the VisiBroker ORB.

This method returns the value `FALSE` if the current effective policies would cause an invocation to raise the system exception `INV_POLICY`. If the current effective policies are incompatible, the out parameter `inconsistent_policies` contains those policies causing the incompatibility. This returned list of policies is not guaranteed to be exhaustive. If the binding fails due to some reason unrelated to policy overrides, the appropriate system exception is raised.

Messaging::RebindPolicy

```
class Messaging::RebindPolicy
```

The VisiBroker implementation of `RebindPolicy` is a complete implementation of `RebindPolicy` as defined in the Messaging Specification with enhancements to support failover.

The `RebindPolicy` of the VisiBroker ORB determines how it handles `GIOP` location-forward messages and object failures. The VisiBroker ORB handles fail-over/rebind by looking at the effective policy at the `CORBA::Object` instance.

The OMG implementation, derived from `CORBA::Policy`, determines whether the VisiBroker ORB may transparently rebind once it is successfully bound to a target server. The extended implementation determines whether the VisiBroker ORB may transparently failover once it is successfully bound to a target Object, thread, or VisiBroker ORB.

IDL definition

```
#pragma prefix "omg.org"
module Messaging {
    typedef short RebindMode;
    const CORBA::PolicyType REBIND_POLICY_TYPE = 23;
    local interface RebindPolicy CORBA::Policy {
        readonly attribute RebindMode rebind_mode;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

Policy values

Note

Policies are enforced only after a successful bind.

The OMG Policy values that can be set as the Rebind Policy are:

Policy Value	Description
TRANSPARENT	This policy allows the VisiBroker ORB to silently handle object-forwarding and necessary reconnection when making a remote request. This is the least restrictive OMG policy value.
NO_REBIND	This policy allows the VisiBroker ORB to silently handle reopening of closed connections while making a remote request, but prevents any transparent object-forwarding that would cause a change in the client-side effective QoS policies.
NO_RECONNECT	This policy prevents the VisiBroker ORB from silently handling object-forwards or the reopening of closed connections. This is the most restrictive OMG policy value.

The VisiBroker-specific values that can be set as the Rebind Policy are:

Policy Value	Description
VB_TRANSPARENT	This policy extends TRANSPARENT behavior to failover conditions in the object, the thread and the VisiBroker ORB. This is the default policy. If this policy is set, if a remote invocation fails because the server object goes down, then the VisiBroker ORB tries to reconnect to another server using the osagent. The VisiBroker ORB masks the communication failure and does not throw an exception to the client.
VB_NOTIFY_REBIND	VB_NOTIFY_REBIND behaves as does VB_TRANSPARENT but throws an exception when the communication failure is detected. It will try to transparently reconnect to another object if the invocation is re-attempted.
VB_NO_REBIND	VB_NO_REBIND does no failover. It only allows the client VisiBroker ORB to reopen a closed GIOP re-connection to the same server; it does not allow object forwarding of any kind.

QoSExt::DeferBind Policy

```
class QoSExt::DeferRebindPolicy
```

By default, the VisiBroker ORB connects to the (remote) object when it receives a `bind()` or a `string_to_object` call.

If set to `TRUE`, this policy changes this behavior; it causes the VisiBroker ORB to delay contacting the Object until the first invocation.

IDL definition

```
#pragma prefix "inprise.com"
module QoSExt {
    interface DeferBindPolicy :CORBA::Policy {
        readonly attribute boolean value;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

QoSExt::RelativeConnectionTimeoutPolicy

```
class QoSExt::RelativeConnectionTimeoutPolicy
```

The `RelativeConnectionTimeoutPolicy` indicates a timeout after which attempts to connect to an object using one of the available endpoints is aborted. The policy value of unsigned longlong type specifies the timeout in 100s of nanoseconds. It is applied to every endpoint that the VisiBroker ORB tries to connect to. Therefore, if multiple connection attempts are made, the elapsed time will be a multiple of the configured timeout. The default value of 0 sets the timeout value to that of the operating system default timeout.

Note

This Policy is not enforced for in-process communications.

IDL definition

```
module QoSExt {
    const CORBA::PolicyType RELATIVE_CONN_TIMEOUT_POLICY_TYPE = 0x56495304;
    local interface RelativeConnectionTimeoutPolicy :CORBA::Policy {
        readonly attribute TimeBase::TimeT relative_expiry;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

Messaging::RelativeRequestTimeoutPolicy

```
class Messaging::RelativeRequestTimeoutPolicy
```

The `RelativeRequestTimeoutPolicy` specifies the maximum time that a client is to block waiting to send an operation request. If the request times out, `CORBA::TIMEOUT` exception is raised.

IDL definition

```
module Messaging{
    const CORBA::PolicyType RELATIVE_REQ_TIMEOUT_POLICY_TYPE = 31;
    local interface RelativeRequestTimeoutPolicy : CORBA::Policy {
        readonly attribute TimeBase::TimeT relative_expiry;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

Messaging::RelativeRoundtripTimeoutPolicy

```
class Messaging::RelativeRoundtripTimeoutPolicy
```

The `RelativeRoundtripTimeoutPolicy` specifies the relative amount of time for which a Request or its corresponding Reply may be delivered. If a response has not yet been delivered after this amount of time, the Request is canceled. Also, if a Request had already been delivered and a Reply is returned from the target, the Reply is discarded after this amount of time. This policy applies to both synchronous and asynchronous invocations. Assuming the request completes within the specified timeout, the Reply will never be discarded due to timeout. The timeout value is specified in 100s of nanoseconds. This policy is also effective in the initial establishment of a connection.

IDL definition

```
module Messaging{
    const CORBA::PolicyType RELATIVE_RT_TIMEOUT_POLICY_TYPE = 32;
    local interface RelativeRoundtripTimeoutPolicy : CORBA::Policy {
        readonly attribute TimeBase::TimeT relative_expiry;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

Messaging::SyncScopePolicy

```
class Messaging::SyncScopePolicy
```

The `SyncScopePolicy` defines the level of synchronization for a request with respect to the target. Values of type `SyncScope` are used in conjunction with a `SyncScopePolicy` to control the behavior of one-way operations.

The default `SyncScopePolicy` is `SYNC_WITH_TRANSPORT`.

IDL definition

```
module Messaging{
    const CORBA::PolicyType SYNC_SCOPE_POLICY_TYPE = 24;
    const SyncScope SYNC_NONE = 0;
    const SyncScope SYNC_WITH_TRANSPORT = 1;
    const SyncScope SYNC_WITH_SERVER = 2;
    const SyncScope SYNC_WITH_TARGET = 3;
    local interface SyncScopePolicy : CORBA::Policy {
        readonly attribute SyncScope synchronization;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

IOP and IIOP interfaces and classes

This section describes the VisiBroker for C++ implementation of the key General Inter-ORB Protocol interfaces and other structures defined by the CORBA specification. For a complete description of these interfaces, refer to the *OMG CORBA/IIOP Specification*.

IIOP::ProfileBody

struct **ProfileBody**

This structure contains information about the protocol supported by an object.

```
module IIOP {  
    . . .  
    struct ProfileBody {  
        GIOP::Version iiop_version;  
        string host;  
        unsigned short port;  
        sequence<octet> object_key;  
        sequence<IOP::TaggedComponent> components;  
    };  
};
```

Include file

The `IOP_c.hh` file should be included when you use this structure.

ProfileBody members

GIOP::Version **iiop_version**

The version of IIOP supported.

CORBA::String_var **host**

The name of the host where the server hosting the object is running.

CORBA::UShort **port**

The port number to use for establishing a connection to the server hosting the object.

CORBA::OctetSequence **object_key**

Object keys are stored in a vendor-specific format and are generated when an IOR is created.

IIOP::MultiComponentProfile **components**

A sequence of TaggedComponents which contain information about the protocols that are supported.

IOP::IOR

`struct IOR`

This structure represents an Interoperable Object Reference and is used to provide important information about object references. Your client application can create a stringified IOR by invoking the `ORB::object_to_string` method.

Include file

The `IOP_c.hh` file should be included when you use this structure.

IOR members

`CORBA::String_var type_id`

This data member describes the type of object reference that is represented by this IOR.

`TaggedProfileSeq profiles`

This data member represents a sequence of one or more `TaggedProfile` structures which contain information about the protocols that are supported.

IOP::TaggedProfile

`struct TaggedProfile`

This structure represents a particular protocol that is supported by an Interoperable Object Reference (IOR).

Include file

The `IOP_c.hh` file should be included when you use this structure.

TaggedProfile members

`ProfileID tag`

The contents of the profile data. Its value should be one of the following:

Value	Description
<code>TAG_INTERNET_IOP</code>	Indicates the protocol is standard IIOP.
<code>TAG_MULTIPLE_COMPONENTS</code>	Indicates the profile data contains a list of VisiBroker ORB services available using the protocol.
<code>TAG_VB_LOCATOR</code>	Indicates that the IOR is an interim, pseudo-object that is used until the real IOR is received by the osagent.
<code>TAG_VSGN_LIOP</code>	Indicates the protocol is IOP over a local IPC mechanism.

`CORBA_OctetSequence profile_data`

This data member encapsulates all the protocol information needed to invoke an operation on an IOR.

Marshal buffer interfaces and classes

This section describes the buffer class used for marshaling data to a buffer when creating an operation request or a reply message. It also describes the buffer class used for extracting data from a received operation request or reply message.

CORBA::MarshalInBuffer

```
class CORBA::MarshalInBuffer : public VISistream
```

This class represents a stream buffer that allows IDL types to be read from a buffer. Interceptor methods that you implement may use this class. Go to ["Portable Interceptor interfaces and classes for C++"](#) for more information on the interceptor interfaces.

The CORBA::MarshalInBuffer class is used on the client side to extract the data associated with a reply message. It is used on the server side to extract the data associated with an operation request. This class provides a wide range of methods for retrieving various types of data from the buffer.

This class also provides several static methods for testing and manipulating CORBA::MarshalInBuffer pointers.

A CORBA::MarshalInBuffer_var class is also offered. It provides a wrapper that automatically manages the contained object.

Include file

The **mbuf.h** file should be included when you use this class. This file gets included in **corba.h**. So, you don't have to include **mbuf.h** separately.

CORBA::MarshalInBuffer constructors/ destructors

```
CORBA::MarshalInBuffer(char *read_buffer, CORBA::ULong  
    length, CORBA::Boolean release_flag=0, CORBA::ULong  
    start_offset=0, CORBA::Boolean byte_order =  
    CORBA::ByteOrder);
```

This is the default constructor.

Parameter	Description
read_buffer	The buffer where the marshaled data will actually be stored.
length	The maximum number of bytes that may be stored in read_buffer.
release_flag	If set to TRUE, the memory associated with read_buffer is freed when this object is destroyed. The default value is FALSE.

Parameter	Description
<code>start_offset</code>	The starting offset wherein data is written in the <code>read_buffer</code> . The default value is 0.
<code>byte_order</code>	Set this to <code>TRUE</code> to indicate that little-endian byte ordering is being used. Set to <code>FALSE</code> to indicate that big-endian byte ordering is being used.

```
virtual ~CORBA::MarshalInBuffer();
```

This is the default destructor. The buffer memory associated with this object is released if the `release_flag` is set to `TRUE`. The `release_flag` may be set when the object is created or by invoking the `release_flag` method, described in [“void release_flag\(CORBA::Boolean val\);” on page 267](#).

CORBA::MarshalInBuffer methods

```
char *buffer() const;
```

Returns a pointer to the buffer associated with this object.

```
void byte_order(CORBA::Boolean val) const;
```

Sets the byte ordering for this message buffer.

Parameter	Description
<code>val</code>	Set this to <code>TRUE</code> to indicate that little-endian byte ordering is being used. Set to <code>FALSE</code> to indicate that big-endian byte ordering is being used.

```
CORBA::Boolean byte_order() const;
```

Returns `TRUE` if the buffer uses little-endian byte ordering. `FALSE` is returned if big-endian byte ordering is used.

```
CORBA::ULong curoff() const;
```

Returns the current offset within the buffer associated with this object.

```
virtual VISistream& get(char& data);
virtual VISistream& get(unsigned char& data);
```

These methods allow you to retrieve a single character from the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
<code>data</code>	The location where the retrieved char or unsigned char is to be stored.

```
virtual VISistream& get(<data_type> data, unsigned
    size);
```

These methods allow you to retrieve a sequence of data from the buffer at the current location. There is a separate method for each of the listed target data types.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
data	The location where the retrieved data is to be stored. The supported target data types are: char* float* unsigned char* double* short* long double* unsigned short* VISLongLong* int* VISULongLong* unsigned int* wchar_t* long* unsigned long*
size	The number of the specified data types to be retrieved.

```
virtual VISistream& getCString(char* data, unsigned maxlen);
```

This method allows you to retrieve a character string from the buffer at the current location. It returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
data	The location where the retrieved character string is to be stored.
maxlen	The maximum number of characters to be retrieved.

```
virtual int is_available(unsigned long size);
```

Returns 1 if the specified size is less than or equal to the size of the buffer associated with this object.

Parameter	Description
size	Number of bytes that need to fit within this buffer.

```
virtual CORBA::ULong length() const;
```

Returns the total number of bytes in this object's buffer.

```
virtual void new_encapsulation() const;
```

Resets the starting offset within the buffer to 0.

```
void release_flag(CORBA::Boolean val);
```

Enables or disables the automatic freeing of buffer memory when this object is destroyed.

Parameter	Description
val	If val is set to TRUE, the buffer memory for this object will be freed when this object is destroyed. If val is set to FALSE, the buffer will not be freed when this object is destroyed.

`CORBA::Boolean release_flag() const;`

Returns `TRUE` if the automatic freeing of this object's buffer memory is enabled, otherwise `FALSE` is returned.

`void reset();`

Resets the starting offset, current offset and seek position to zero.

`void rewind();`

Resets the seek position to zero.

`CORBA::ULong seekpos(CORBA::ULong pos);`

Sets the current offset to the value contained in `pos`. If `pos` specifies an offset that is greater than the size of the buffer, a `CORBA::BAD_PARAM` exception is raised.

`static CORBA::MarshalInBuffer
*_duplicate(CORBA::MarshalInBuffer_ptr ptr);`

Returns a duplicate pointer to the object pointed to by `ptr` and increments this object's reference count.

`static CORBA::MarshalInBuffer *_nil();`

Returns a `NULL` pointer of type `CORBA::MarshalInBuffer`.

`static void _release(CORBA::MarshalInBuffer_ptr ptr);`

Reduces the reference count of the object pointed to by `ptr`. When the reference count reaches 0, the object is destroyed. If the object's `release_flag` was set to `TRUE` when the object was constructed, the buffer associated with the object is freed.

CORBA::MarshalInBuffer operators

`virtual VISistream&operator>>(<data_type> data);`

This stream operator allows you retrieve a sequence of data of the specified source `data_type` at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just written.

Parameter	Description
<code>data</code>	The data to be written to the buffer. The supported source data types are: <code>char*&</code> <code>long&</code> <code>char&</code> <code>unsigned long&</code> <code>unsigned char&</code> <code>float&</code> <code>short&</code> <code>double&</code> <code>unsigned short&</code> <code>long double&</code> <code>int&</code> <code>wchar_t*&</code> <code>unsigned int&</code> <code>wchar_t&</code>

CORBA::MarshalOutBuffer

```
class CORBA::MarshalOutBuffer : public VISostream
```

This class represents a stream buffer that allows IDL types to be written to a buffer and may be used by interceptor methods that you implement. Go to [“VisiBroker Interceptor and object wrapper interfaces and classes for C++”](#), for more information on the interceptor interfaces.

The CORBA::MarshalOutBuffer class is used on the client side to marshal the data associated with an operation request. It is used on the server side to marshal the data associated with a reply message. This class provides a wide range of methods for adding various types of data to the buffer or for retrieving what was written from the buffer.

This class provides several static methods for testing and manipulating CORBA::MarshalOutBuffer pointers.

A CORBA::MarshalOutBuffer_var class is also offered. It provides a wrapper that automatically manages the contained object.

Include file

The **mbuf.h** file should be included when you use this class. This file gets included in **corba.h**. So, you don't have to separately include **mbuf.h**.

CORBA::MarshalOutBuffer constructors/ destructors

```
CORBA::MarshalOutBuffer(CORBA::ULong initial_size =  
    255, CORBA::Boolean release_flag = 0, CORBA::ULong  
    start_offset = 0);
```

Creates a marshalOutBuffer of size initial_size. The MarshalOutBuffers are capable of resizing themselves during a put operation. When there is not enough space in the buffer to hold all the data written to it, the size of the buffer doubles.

Parameter	Description
initial_size	The initial size of the buffer associated with this object. The default size is 255 bytes.
release_flag	If set to TRUE, the memory associated with read_buffer is freed when this object is destroyed. The default value is FALSE.
start_offset	Set the starting offset within the buffer. Defaults to 0, that is starting from the very beginning of the buffer.

```
CORBA::MarshalOutBuffer(char *read_buffer, CORBA::ULong  
    len, CORBA::Boolean release_flag=0, CORBA::ULong  
    start_offset = );
```

Creates an object with the specified buffer, buffer length and release flag value.

Parameter	Description
read_buffer	The buffer where the marshaled data will actually be stored.
length	The maximum number of bytes that may be stored in read_buffer.

Parameter	Description
<code>release_flag</code>	If set to <code>TRUE</code> , the memory associated with <code>read_buffer</code> is freed when this object is destroyed. The default value is <code>FALSE</code> .
<code>start_offset</code>	Set the starting offset within the buffer. Defaults to 0, that is starting from the very beginning of the buffer.

```
virtual ~CORBA::MarshalOutBuffer();
```

This is the default destructor. The buffer memory associated with this object is released if the `release_flag` is set to `TRUE`. The `release_flag` may be set when the object is created or by invoking the `release_flag` method, described in “[CORBA::Boolean release_flag\(\) const;](#)” on page 268.

CORBA::MarshalOutBuffer methods

```
char *buffer() const;
```

Returns a pointer to the buffer associated with this object.

```
CORBA::ULong curoff() const;
```

Returns the current offset within the buffer associated with this object.

```
virtual CORBA::ULong length() const;
```

Returns the total number of bytes in this object's buffer.

```
virtual void new_encapsulation() const;
```

Resets the starting offset within the buffer to zero.

```
virtual VISostream& put(char data);
```

Adds a single character to the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description
<code>data</code>	The char to be stored.

```
virtual VISostream& put(const <data_type> data,
    unsigned size);
```

These methods allow you to store a sequence of data in the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description												
<code>data</code>	The data is to be stored. The supported source data types are: <table border="0"> <tr> <td><code>char*</code></td> <td><code>float*</code></td> </tr> <tr> <td><code>unsigned char*</code></td> <td><code>double*</code></td> </tr> <tr> <td><code>short*</code></td> <td><code>long double*</code></td> </tr> <tr> <td><code>unsigned short*</code></td> <td><code>VISLongLong*</code></td> </tr> <tr> <td><code>int*</code></td> <td><code>VISULongLong*</code></td> </tr> <tr> <td><code>unsigned int*</code></td> <td><code>wchar_t*</code></td> </tr> </table>	<code>char*</code>	<code>float*</code>	<code>unsigned char*</code>	<code>double*</code>	<code>short*</code>	<code>long double*</code>	<code>unsigned short*</code>	<code>VISLongLong*</code>	<code>int*</code>	<code>VISULongLong*</code>	<code>unsigned int*</code>	<code>wchar_t*</code>
<code>char*</code>	<code>float*</code>												
<code>unsigned char*</code>	<code>double*</code>												
<code>short*</code>	<code>long double*</code>												
<code>unsigned short*</code>	<code>VISLongLong*</code>												
<code>int*</code>	<code>VISULongLong*</code>												
<code>unsigned int*</code>	<code>wchar_t*</code>												

Parameter	Description
	long*
	unsigned long*
size	The number of the specified data types to be stored.

```
virtual VISostream& putCString(const char* data);
```

This method allows you to store a character string into the buffer at the current location. It returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description
data	The character string to be stored.

```
void release_flag(CORBA::Boolean val);
```

Enables or disables the automatic freeing of buffer memory when this object is destroyed.

Parameter	Description
val	If val is set to TRUE, the buffer memory for this object will be freed when this object is destroyed. If val is set to FALSE, the buffer will not be freed when this object is destroyed

```
CORBA::Boolean release_flag() const;
```

Returns TRUE if the automatic freeing of this object's buffer memory is enabled, otherwise returns FALSE.

```
void reset();
```

Resets the starting offset, current offset and seek position to zero.

```
void rewind();
```

Resets the seek position to zero.

```
CORBA::ULong seekpos(CORBA::ULong pos);
```

Sets the current offset to the value contained in pos. If pos specifies an offset that is greater than the size of the buffer, a CORBA::BAD_PARAM exception is raised.

```
static CORBA::MarshalOutBuffer  
* _duplicate(CORBA::MarshalOutBuffer_ptr ptr);
```

Returns a duplicate pointer to this object pointed to by ptr and increments this object's reference count.

```
static CORBA::MarshalOutBuffer * _nil();
```

Returns a NULL pointer of type CORBA::MarshalOutBuffer.

```
static void _release(CORBA::MarshalOutBuffer_ptr ptr);
```

Reduces the reference count of the object pointed to by ptr. If the reference count is then zero, the object is destroyed. If the object's release_flag was set to TRUE when it was constructed, the buffer associated with the object is freed.

CORBA::MarshalOutBuffer operators

```
virtual VISostream& operator<<(<data_type> data);
```

This stream operator allows you to add data of the specified `data_type` to the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just written.

Parameter	Description
<code>data</code>	The data to be obtained to the buffer. The supported data types are: <code>const char*</code> <code>float</code> <code>char</code> <code>double</code> <code>unsigned char</code> <code>long double</code> <code>short</code> <code>VISLongLong</code> <code>unsigned short</code> <code>VISULongLong</code> <code>int</code> <code>wchar_t*</code> <code>unsigned int</code> <code>wchar_t</code> <code>long</code> <code>unsigned long</code>

Location service interfaces and classes

This section describes the interfaces you can use to locate object instances on a network of Smart Agents. For more information on the Location Service, see "Using the Location Service" in the *VisiBroker for C++ Developer's Guide*.

Agent

```
class Agent : public CORBA::Object
```

This class provides methods that enable you to locate all instances of a particular object on a network of Smart Agents. The methods offered by this class are divided into two categories: those that query a Smart Agent for data about objects and those that deal with *triggers*.

Your client application can obtain object information based on an interface repository ID alone or in combination with an instance name.

Triggers allow your client application to be notified of changes in the availability of one or more object instances.

IDL definition

```
interface Agent {
    HostnameSeq all_agent_locations()
        raises (Fail);
    RepositoryIdSeq all_repository_ids()
        raises (Fail);
    ObjSeqSeq all_available()
        raises (Fail);
    ObjSeq all_instances (in string repository_id)
        raises (Fail);
    ObjSeq all_replica (in string repository_id, in string
instance_name)
        raises (Fail);
    DescSeqSeq all_available_descs()
        raises (Fail);
    DescSeq all_instances_descs (in string repository_id)
        raises (Fail);
    DescSeq all_replica_descs (in string repository_id,
in string instance_name)
        raises (Fail);
    void reg_trigger(in TriggerDesc desc, in
TriggerHandler handler)
        raises (Fail);
    void unreg_trigger(in TriggerDesc desc, in
TriggerHandler handler)
        raises (Fail);
    attribute boolean willRefreshOADs;
};
```

Include file

You should include the `locate_c.hh` file when you use this class.

Agent methods

```
ObjLocation::HostnameSeq_ptr all_agent_locations ();
```

Returns a sequence of host names representing the hosts on which osagent processes are currently executing.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

```
ObjLocation::ObjSeqSeq all_available ();
```

Returns a sequence of object references for all objects currently registered with some Smart Agent on the network.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

```
ObjLocation::DescSeqSeq_ptr all_available_descs ();
```

Returns descriptions for all objects currently registered with a Smart Agent on the network. The description information returned is organized by repository id.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

```
ObjLocation::ObjSeq_ptr all_instances(const char  
*repository_id);
```

Returns a sequence of object references to all instances with the specified repository_id.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object references to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the <code>FailReason</code> values, other than <code>NO_SUCH_TRIGGER</code> , may be presented. For more information on the <code>Fail</code> class, see “Fail” .

```
ObjLocation::DescSeq_ptr all_instances_descs(const char *repository_id);
```

Returns description information for all object instances with the specified `repository_id`.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object descriptions to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the <code>FailReason</code> values, other than <code>NO_SUCH_TRIGGER</code> , may be presented. For more information on the <code>Fail</code> class, see “Fail” .

```
ObjLocation::ObjSeq_ptr all_replica(const char *repository_id, const char *instance_name);
```

Returns a sequence of object references for objects with the specified `repository_id` and `instance_name`.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object references to be retrieved.
instance_name	The instance name of the object references to be returned.

This method throws the following exceptions:

Exception	Description
Fail	Any of the <code>FailReason</code> values, other than <code>NO_SUCH_TRIGGER</code> , may be presented. For more information on the <code>Fail</code> class, see “Fail” .

```
ObjLocation::DescSeq_ptr all_replica_descs(const char
    *repository_id, const char *instance_name);
```

Returns a sequence of description information for all object instances with the specified repository_id and instance_name.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object descriptions to be retrieved.
instance_name	The instance name of the object descriptions to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO_SUCH_TRIGGER, may be presented. For more information on the Fail class, see “Fail” .

```
CORBA::StringSequence* all_repository_ids();
```

This method retrieves all interfaces known to any osagent. This method throws the following exception:

Exception	Description
Fail	The FailReason values that may be presented include NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

```
void reg_trigger(const ObjLocation::TriggerDesc& desc,
    ObjLocation::TriggerHandler_ptr hdlr);
```

Registers the trigger handler hdlr for object instances that match the description information specified in desc.

Note

A TriggerHandler is invoked every time an object that satisfies the trigger's description becomes available. If you are only interested in learning when the first instance of the object becomes available, you should use the unreg_trigger method to remove the trigger after the first notification is received.

Parameter	Description
desc	The object instance description information, which can contain combinations of the following information: repository ID, instance name, hostname. You can provide more or less information to narrow or widen the object instances to be monitored.
hdlr	The trigger handler object being registered.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO_SUCH_TRIGGER, may be presented. For more information on the Fail class, see “Fail” .

```
void unreg_trigger(const ObjLocation::TriggerDesc&
    desc, ObjLocation::TriggerHandler_ptr hdlr);
```

Unregisters the trigger handler `hdlr` for object instances that match the description information specified in `desc`.

Parameter	Description
<code>desc</code>	The object description information.
<code>hdlr</code>	The trigger handler object being unregistered.

This method throws the following exceptions:

Exception	Description
<code>Fail</code>	The only <code>FailReason</code> value possible is <code>NO_SUCH_TRIGGER</code> . For more information on the <code>Fail</code> class, see " Fail ".

```
CORBA::Boolean willRefreshOADs();
```

Returns `TRUE` if the set of Object Activation Daemon is updated each time a method offered by this class is invoked, otherwise returns `FALSE`. If the cache is not refreshed on each invocation, the following conditions may occur:

- All objects are still reported, but their descriptor's activable flag may be incorrect.
- Any attempt to verify the existence of an object registered with an OAD that has been started since the last refresh of the OAD cache causes those objects to be activated by the OAD.

```
void willRefreshOADs(CORBA::Boolean val);
```

This class maintains a set of Object Activation Daemons. This method enables or disables the automatic refreshing of the OADs contained in this set.

Parameter	Description
<code>val</code>	If <code>TRUE</code> , the OAD set will be refreshed whenever a method offered by this class is invoked.

Desc

```
struct Desc
```

This structure contains information you use to describe the characteristics of an object. You pass this structure as an argument to several of the Location Service methods described in the chapter. The `Desc` structure, or a sequence of them, is returned by some of the Location Service methods.

See also

["<type>Seq"](#)

IDL definition

```
module ObjLocation {
    struct Desc {
        Object ref;
        IIOP::ProfileBody iiop_locator;
    };
};
```

```

        string repository_id;
        string instance_name;
        boolean activable;
        string agent_hostname;
    };
};

```

Desc members

Object **ref**

A reference to the object being described.

IIOP::ProfileBody **iiop_locator**

Represents profile data for the object, described in "[IIOP::ProfileBody](#)".

CORBA::String_var **repository_id**

The object's repository identifier.

CORBA::String_var **instance_name**

The object's instance name.

CORBA::Boolean **activable**

Set to TRUE to indicate that this object is registered with the Object Activation Daemon. It is set to FALSE to indicate that the object was started manually and is registered with the osagent.

CORBA::String_var **agent_hostname**

The name of the host running the Smart Agent with which this object is registered.

Fail

```
class Fail : public CORBA::UserException
```

This exception class may be thrown by the Agent class to indicate various errors. The data member `FailReason` is used to indicate the nature of the failure.

Fail members

FailReason **reason**

Set to one of the following values to indicate the nature of the failure:

```

enum FailReason {
    NO_AGENT_AVAILABLE,
    INVALID_REPOSITORY_ID,
    INVALID_OBJECT_NAME,
    NO_SUCH_TRIGGER,
    AGENT_ERROR
};

```

TriggerDesc

```
struct TriggerDesc
```

This structure contains information you use to describe the characteristics of one or more objects for which you wish to register a `TriggerHandler`, described in [“TriggerHandler” on page 279](#).

The `host_name` and `instance_name` members may be set to `NULL` to monitor the widest possible set of objects. The more information specified, the smaller the set of objects is.

IDL definition

```
module ObjLocation {  
    . . .  
    struct TriggerDesc {  
        string repository_id;  
        string instance_name;  
        string host_name;  
    };  
    . . .  
};
```

TriggerDesc members

```
CORBA::String_var repository_id
```

The repository identifiers of the objects to be monitored by the `TriggerHandler`. May be set to `NULL` to include all possible repository identifiers.

```
CORBA::String_var instance_name
```

The instance name of the object to be monitored by the `TriggerHandler`. May be set to `NULL` to include all possible instance names.

```
CORBA::String_var host_name;
```

The host name where the object or objects monitored by the `TriggerHandler` are located. May be set to `NULL` to include all hosts in the network.

TriggerHandler

You use this base class to derive your own callback object to be invoked every time an object becomes available or unavailable. You specify the criteria for the object or objects in which you are interested. You register your `TriggerHandler` object using the `Agent::reg_trigger` method, described in [“TriggerHandler” on page 279](#).

You must provide implementations for the `impl_is_ready` and `impl_is_down` methods.

IDL definition

```
interface TriggerHandler {  
    void impl_is_ready(in Desc desc);  
    void impl_is_down(in Desc desc);  
};
```

Include file

You should include the `locate_c.hh` file when you use this class.

TriggerHandler methods

```
virtual void impl_is_ready(const Desc& desc);
```

This method is invoked by the Location Service when an object instance matching the criteria specified in `desc` becomes accessible.

Parameter	Description
<code>desc</code>	The object description information.

```
virtual void impl_is_down(const Desc& desc);
```

This method is invoked by the Location Service when an object instance matching the criteria specified in `desc` is no longer accessible.

Parameter	Description
<code>desc</code>	The object description information.

<type>Seq

This is a generalized class description for the following sequence classes used by the Location Service:

Class	Description
<code>DescSeq</code>	A sequence of <code>Desc</code> structures.
<code>HostnameSeq</code>	A sequence of host names.
<code>ObjSeq</code>	A sequence of object references.
<code>RepositoryIdSeq</code>	A sequence of repository identifiers.

Each class represents a particular sequence of `<type>`. The Location Service returns lists of information to your client application in the form of sequences which are mapped to one of these classes.

Each class offers operators for indexing items in the sequence just as you would a C++ array. Each class also offers methods for setting and obtaining the length of the array.

The code sample below shows the correct way to index a `HostnameSeq` returned from the `Agent::all_agent_locations` method.

```
. . . .
ObjLocation::HostnameSeq_var hostnames(myAgent->
all_agent_locations());
for (CORBA::ULong i=0; i < hostnames->length(); i++) {
    cout << "Agent host #" << i+1 << ": " << hostnames[i] <<
endl;
}
. . . .
```

See also

[“<type>SeqSeq”](#)

<type>Seq methods

```
<type>& operator [] (CORBA::ULong index) const;
```

Returns a reference to the element in the sequence identified by `index`.

Caution

You must use a `CORBA::ULong` type for the index. Using an `int` type may lead to unpredictable results.

Parameter	Description
<code>index</code>	The zero-based index of the element to be returned.

This method throws the following exception:

Exception	Description
<code>CORBA::BAD_PARAM</code>	The index specified is less than zero or greater than the size of the sequence.

```
CORBA::ULong length() const;
```

Returns the number of elements in the sequence.

```
void length(CORBA::ULong len);
```

Sets the maximum length of the sequence to the value contained in `len`.

Parameter	Description
<code>len</code>	The new length for the sequence.

<type>SeqSeq

This is a generalized class description for the following classes used by the Location Service:

Class	Description
<code>DescSeqSeq</code>	A sequence of <code>DescSeq</code> objects.
<code>ObjSeqSeq</code>	A sequence of <code>ObjSeq</code> objects.

Each class represents a particular sequence of `<type>Seq`. Some Location Service methods return lists of information to your client application in the form of sequences of sequences which are mapped to one of these classes.

Each class offers operators for indexing items in the sequence just as you would a C++ array. The class also offer methods for setting and obtaining the length of the array.

See also

[“<type>Seq”](#)

<type>SeqSeq methods

```
<type>Seq& operator [] (CORBA::ULong index) const;
```

Returns a reference to the element in the sequence identified by `index`. The reference is to a one dimensional sequence, described in [“<type>Seq”](#)

Caution

You must use a `CORBA::ULong` type for the index. Using an `int` type may lead to unpredictable results.

Parameter	Description
<code>index</code>	The zero-based index of the element to be returned.

This method throws the following exceptions:

Exception	Description
<code>CORBA::BAD_PARAM</code>	The index specified is less than zero or greater than the size of the sequence.

```
CORBA::ULong length() const;
```

Returns the number of elements in the sequence.

```
void length(CORBA::ULong len);
```

Sets the maximum length of the sequence to the value contained in `len`.

Parameter	Description
<code>len</code>	The new length for the sequence.

Initialization interfaces and classes

This section describes the interfaces and classes that are provided for statically initializing VisiBroker ORB services such as interceptors.

VISInit

```
class VISInit
```

This abstract base class provides for the static initialization of service classes after the VisiBroker ORB and BOA have been initialized. By deriving your service class from `VISInit` and declaring it statically, you ensure that your service class instance will be properly initialized.

The VisiBroker ORB invokes the `VISInit::ORB_init` and `VISInit::BOA_init` whenever the application calls `CORBA::ORB_init` or `BOA_init` methods. By providing your own implementations of these methods, you may add any needed initialization that must be performed for your service.

Include file

Include the `vinit.h` file when you use this class.

VISInit constructors/destructors

```
VISInit();
```

This is the default constructor.

```
VISInit(CORBA::Long init_priority);
```

This constructor creates a `VISInit`-derived object with the specified priority, which determines when it will be initialized relative to other `VISInit`-derived objects.

Internal VisiBroker classes which need to be initialized before user-defined classes have a negative priority value. The lowest priority value currently used by VisiBroker internal classes is `-10` to `10`.

Note

You should set a priority value less than `-10` if your class must be initialized before the VisiBroker internal classes.

If no priority value is specified, the default value is `0`, which means that the class will be initialized after the internal VisiBroker classes.

Parameter	Description
<code>init_priority</code>	The initialization priority for this object. A negative priority value causes this class to be initialized earlier. A positive priority value causes this class to be initialized later.

```
virtual ~VISInit();
```

This is the default destructor.

VISInit methods

```
virtual void ORB_init(int& argc, char * const *argv,  
CORBA::ORB_ptr orb);
```

This method will be called during VisiBroker ORB initialization. Your implementation should provide for the initialization of the client-side interceptor factory that you wish to use.

Parameter	Description
argc	The count of arguments.
argv	An array of argument pointers.
orb	The VisiBroker ORB being initialized.

```
virtual void ORB_initialized(CORBA::ORB_ptr orb);
```

This method will be called after the VisiBroker ORB is initialized. Your implementation should provide for the initialization of the client-side interceptor factory that you wish to use.

Parameter	Description
orb	The VisiBroker ORB being initialized.

```
virtual void BOA_init(int& argc, char * const *argv,  
CORBA::BOA_ptr boa);
```

This method will be called when the BOA is initialized. Your implementation should provide for the initialization of the server-side interceptor factory that you wish to use.

Parameter	Description
argc	The count of arguments.
argv	An array of argument pointers.
boa	The BOA being initialized.

```
virtual void ORB_shutdown();
```

This method will be called when the VisiBroker ORB is shut down.

Real-Time CORBA interfaces and classes

This section describes the Real-Time CORBA interfaces and classes supported by VisiBroker for C++.

Note

Before using these interfaces, read “Real-Time CORBA Extensions” in the *VisiBroker for C++ Developer's Guide* for descriptions and usage information on the supported extensions.

Introduction

Real-Time CORBA provides a set of APIs that support the development of predictable CORBA-based systems, through the control of the number and priority of threads involved in the execution of CORBA invocations.

The majority of the Real-Time CORBA API is specified in IDL, and is mapped to C++ according to the rules of the CORBA C++ language mapping. The Real-Time CORBA IDL is scoped within module `RTCORBA`, and hence the C++ class names are all prefixed `RTCORBA::`.

The following Real-Time CORBA interfaces and classes are described in the sections that follow:

- [RTCORBA::Current](#)
- [RTCORBA::Mutex](#)
- [RTCORBA::NativePriority](#)
- [RTCORBA::Priority](#)
- [RTCORBA::PriorityMapping](#)
- [RTCORBA::PriorityModel](#)
- [RTCORBA::PriorityModelPolicy](#)
- [RTCORBA::RTORB](#)
- [RTCORBA::ThreadpoolId](#)
- [RTCORBA::ThreadpoolPolicy](#)

Include file

To use any of the Real-Time CORBA features described in this chapter, the application should include the file `rtcorba.h`, which is one of the include files supplied with VisiBroker for C++.

RTCORBA::Current

```
class RTCORBA::Current : public virtual CORBA::Current,
    public virtual CORBA::LocalObject
    typedef RTCORBA::Current* Current_ptr
    class RTCORBA::Current_var
```

The class `RTCORBA::Current` provides methods that allow a Real-Time CORBA Priority value to be associated with the current thread of execution, and the reading of the Real-Time CORBA Priority value presently associated with the current thread.

When a Real-Time CORBA Priority value is associated with the current thread, that value is immediately used to set the Native Priority of the underlying thread. The Native Priority value to apply to the thread is obtained by means of the currently installed Priority Mapping.

Where the Client Propagated Priority Model is in use, the Priority associated with a thread also determines the priority of CORBA invocations made from that thread. For details, see “Real-Time CORBA Priority Models” in the *VisiBroker for C++ Developer's Guide*.

`RTCORBA::Current` is defined in IDL, as a locality constrained interface. Hence applications handle `RTCORBA::Current` by means of CORBA `LocalObject` References, using the C++ classes `RTCORBA::Current_ptr` and `RTCORBA::Current_var`.

See “[RTCORBA::Priority](#)” for more information.

RTCORBA::Current Creation and Destruction

`RTCORBA::Current` is a special interface. Applications need not be concerned with which instance of it they are dealing. A reference to `RTCORBA::Current` is obtained through the `resolve_initial_references` method of `RTORB`, and is released in the normal way when it is no longer required. For details see “Real-Time CORBA Current” in the *VisiBroker for C++ Developer's Guide*.

IDL definition

```
//Locality Constrained Object
local interface Current : CORBA::Current {
    attribute Priority base_priority;
};
```

RTCORBA::Current methods

```
void base_priority(Priority _val);
```

Associates the `RTCORBA::Priority` value `_val` with the current thread of execution.

Parameter	Description
<code>_val</code>	The Priority value to associate with the thread.

```
Priority base_priority();
```

Gets the `RTCORBA::Priority` value associated with the current thread of execution.

RTCORBA::Mutex

```
class RTCORBA::Mutex : public virtual CORBA::
                        LocalObject
    typedef RTCORBA::Mutex* RTCORBA::Mutex_ptr
    class RTCORBA::Mutex_var
    class TimeBase {
    typedef unsigned long long TimeT;
    };
```

The interface `RTCORBA::Mutex` provides applications with a mutex synchronization primitive that is guaranteed to have the same priority inheritance properties as mutexes used internally by VisiBroker to protect ORB resources. For details, see “Real-Time CORBA Mutex API” in the *VisiBroker for C++ Developer's Guide*.

`RTCORBA::Mutex` is defined in IDL, as a locality constrained interface. Hence applications handle `RTCORBA::Mutex` instances by means of CORBA LocalObject References, using the C++ classes `RTCORBA::Mutex_ptr` and `RTCORBA::Mutex_var`.

See “[RTCORBA::RTORB](#)” for more information.

Mutex Creation and Destruction

A new `RTCORBA::Mutex` is obtained using the `create_mutex` operation of the `RTCORBA::RTORB` interface. The new `RTCORBA::Mutex` is created in an unlocked state.

When the `RTCORBA::Mutex` is no longer needed, it is destroyed using the `destroy_mutex` operation of `RTCORBA::RTORB`. See “[RTCORBA::RTORB](#)” for details.

Note that if the `RTCORBA::Mutex_var` type is used in place of the `RTCORBA::Mutex_ptr` type, the reference is automatically released when the `_var` instance goes out of scope, but the `RTCORBA::Mutex` instance it refers to is not automatically destroyed. The `RTCORBA::Mutex` instance must still be destroyed with a call to `destroy_mutex`.

IDL definition

```
// Locality Constrained Object
local interface Mutex {
void lock();
void unlock();
boolean try_lock ( in TimeBase::TimeT max_wait );
};
local interface RTORB {
f
Mutex create_mutex();
void destroy_mutex( in Mutex the_mutex );
f
};
// defined in TimeBase.idl
module TimeBase {
typedef unsigned long long TimeT;
};
```

RTCORBA::Mutex Methods

```
void lock();
```

Locks the `RTCORBA::Mutex`. When the `RTCORBA::Mutex` object is in the unlocked state, the first thread to call the `lock()` operation causes the `Mutex` object to change to the locked state. Subsequent threads that call the `lock()` operation while the `Mutex` object is still in the locked state will block until the owner thread unlocks it.

```
void unlock();
```

Unlocks the locked `RTCORBA::Mutex`.

```
CORBA::Boolean try_lock( const TimeBase::TimeT _max_wait  
    );
```

Attempts to lock the `RTCORBA::Mutex`, waiting for a maximum of `_max_wait` amount of time. Returns true if the lock is successfully taken within the time, or false if it could not be taken before the time expired.

Parameter	Description
<code>_max_wait</code>	The maximum amount of time to wait for the lock, in 100-nanosecond ticks. A value of 0 means do not wait for the lock.

RTCORBA::NativePriority

```
typedef CORBA::Short RTCORBA::NativePriority
```

The type `RTCORBA::NativePriority` is used to represent priorities in the priority scheme of the particular Operating System that the Real-Time ORB is running on. Real-Time CORBA applications only use `RTCORBA::NativePriority` values in special circumstances:

- When defining a Priority Mapping. For details, see [“RTCORBA::PriorityMapping”](#).
- When interacting directly with the Operating System, or with some other non-CORBA subsystem, that works in terms of Native Priorities. This should still be done by means of the installed Priority Mapping. For details, see “Using Native Priorities in VisiBroker Application Code” in the *VisiBroker for C++ Developer's Guide*.

Normally, within a Real-Time CORBA application, priorities are expressed in terms of `RTCORBA::Priority` values.

IDL definition

```
typedef short NativePriority;
```

RTCORBA::Priority

```
typedef CORBA::Short RTCORBA::Priority  
    static const Priority RTCORBA::minPriority; // 0  
    static const Priority RTCORBA::maxPriority; // 32767
```

The type `RTCORBA::Priority` should be used to represent priority values in a Real-Time CORBA application. These values are mapped on to the Native Priority scheme of the particular Operating System that the application is running on by the currently installed Priority Mapping. For a

detailed discussion of Real-Time CORBA Priority, see “Real-Time CORBA Priority” in the *VisiBroker for C++ Developer's Guide*.

The only time a Real-Time CORBA application should use Native Priority values is when interacting directly with the Operating System or some other non-CORBA subsystem. Even then, this should still be done using the installed Priority Mapping. For details see 'Using Native Priorities in VisiBroker Application Code' in the *VisiBroker for C++ Developer's Guide*.

`RTCORBA::Priority` values are in the range 0 to 32767. However, it is not expected that this full range of priorities will be used in a Real-Time CORBA system. Instead, the application system designer should decide on a suitable range of priorities for that system, and implement a Priority Mapping that only allows priority values in that range. For many applications the default valid range of 0 to 31 is acceptable, but there might still be reasons to override the default Priority Mapping. See “[RTCORBA::PriorityMapping](#)” for details.

IDL definition

```
typedef short Priority;
static const Priority minPriority; // 0
static const Priority maxPriority; // 32767
```

RTCORBA::PriorityMapping

```
class RTCORBA::PriorityMapping
```

The `RTCORBA::PriorityMapping` class facilitates the mapping of `RTCORBA::Priority` values to and from the Native Priority scheme of the Operating System the Real-Time ORB is running on. The ORB calls out to a Priority Mapping object whenever it needs to map a `RTCORBA::Priority` value to a `RTCORBA::NativePriority` value or vice versa.

A Real-Time CORBA application should describe its priorities in terms of `RTCORBA::Priority` values. However, the application might need to make explicit use of the installed Priority Mapping, in order to interact directly with the Operating System or some other non-CORBA subsystem. For details see “Using Native Priorities in VisiBroker Application Code” in the *VisiBroker for C++ Developer's Guide*.

The range of `RTCORBA::Priority` values supported by a Priority Mapping should always start from zero. The Real-Time ORB expects `RTCORBA::Priority` zero to be valid. Also, this convention makes integration of different Real-Time CORBA systems on the same node easier.

PriorityMapping Creation and Destruction

It is not necessary to create instances of a Priority Mapping in the code of a normal Real-Time CORBA application. The available Priority Mapping is automatically used by the ORB, and can be accessed by the application if necessary.

Exactly one Priority Mapping is 'installed' at any one time. A 'default' Priority Mapping is provided, which is installed by default. This Default Priority Mapping can be overridden by installing an application-implemented Priority Mapping object. The installation process is described in the section “Replacing the Default Priority Mapping” in the *VisiBroker for C++ Developer's Guide*.

IDL definition

```
// 'native' IDL type
native PriorityMapping;
```

The `RTCORBA::PriorityMapping` IDL type is defined as a 'native' IDL type. This means that its mapping to different programming languages is defined on a per-language basis. The C++ class representing `RTCORBA::PriorityMapping` has the following declaration:

```
class PriorityMapping {
public:
virtual CORBA::Boolean to_native(
RTCORBA::Priority corba_priority,
RTCORBA::NativePriority &native_priority )=0;
virtual CORBA::Boolean to_CORBA(
RTCORBA::NativePriority native_priority,
RTCORBA::Priority &corba_priority )=0;
virtual RTCORBA::Priority max_priority() = 0;
PriorityMapping();
virtual ~PriorityMapping() {}
static RTCORBA::PriorityMapping * instance();
};
```

The purpose of each method is explained in the next section, [“PriorityMapping Methods”](#).

PriorityMapping Methods

```
static RTCORBA::PriorityMapping * instance();
```

This static method, implemented by `VisiBroker` for C++, can be used by Real-Time CORBA applications to access the currently installed Priority Mapping. For details see “Using Native Priorities in `VisiBroker` Application Code” in the ***VisiBroker for C++ Developer's Guide***.

```
virtual RTCORBA::Priority max_priority() = 0;
```

This method returns the maximum Real-Time CORBA Priority value that is valid using this Priority Mapping. For example, if the installed Priority Mapping maps Real-Time CORBA Priorities in the range 0 to 31, the value 31 will be returned every time this method is called.

This method must be implemented when implementing a new Priority Mapping.

```
virtual CORBA::Boolean to_CORBA (
RTCORBA::NativePriority native_priority,
RTCORBA::Priority &corba_priority ) = 0;
```

This method maps a given Native Priority value, `native_priority`, to a Real-Time CORBA Priority value. If the Native Priority value is in the range supported by this Priority Mapping, the resultant Real-Time CORBA Priority value is stored in `corba_priority`, and a true value is returned. Otherwise `corba_priority` is not changed, and a false is returned.

This method must be implemented when implementing a new Priority Mapping.

Parameter	Description
native_priority	The Native Priority value to be mapped to a Real-Time CORBA Priority.
corba_priority	The variable to assign the mapped Real-Time CORBA Priority value to.

```
virtual CORBA::Boolean to_native (  
    RTCORBA::Priority corba_priority,  
    RTCORBA::NativePriority &native_priority ) = 0;
```

This method maps a given Real-Time CORBA Priority value, `corba_priority`, to a Native Priority value. If the Real-Time CORBA Priority value is in the range supported by this Priority Mapping, the resultant Native Priority value is stored in `native_priority`, and a true value is returned. Otherwise `native_priority` is not changed, and a false value is returned.

This method must be implemented when implementing a new Priority Mapping.

Parameter	Description
corba_priority	The CORBA Priority value to be mapped to a Native Priority.
native_priority	The variable to assign the mapped Native Priority value to.

RTCORBA::PriorityModel

```
enum RTCORBA::PriorityModel {  
    CLIENT_PROPAGATED,  
    SERVER_DECLARED  
};
```

This enumeration specifies the two Real-Time CORBA Priority Models: Client Propagated Priority Model and Server Declared Priority Model. These are described in the section “Real-Time CORBA Priority Models” in the *VisiBroker for C++ Developer's Guide*.

These enumeration values are used as values for a parameter to the `create_priority_model_policy` method of `RTCORBA::RTORB`. See “[RTCORBA::PriorityModelPolicy](#)” for details.

RTCORBA::PriorityModelPolicy

```
class RTCORBA::PriorityModelPolicy : public virtual
    CORBA::Policy, public virtual CORBA::LocalObject
```

An instance of this Real-Time Policy type is created by calling the `create_priority_model_policy` method of `RTCORBA::RTORB`. The Policy instance can then be used to configure a Real-Time POA at the time of its creation, by passing it into the `create_POA` method, as a member of the Policy List parameter.

See “[RTCORBA::RTORB](#)” and “[RTCORBA::PriorityModel](#)” for more information.

IDL definition

```
local interface PriorityModelPolicy : CORBA::Policy {
    readonly attribute PriorityModel priority_model;
    readonly attribute Priority server_priority;
};
```

RTCORBA::RTORB

```
class RTCORBA::RTORB : public virtual
    CORBA::LocalObject
{
    typedef RTCORBA::RTORB* RTCORBA::RTORB_ptr
    class RTCORBA::RTORB_var
```

The interface `RTCORBA::RTORB` provides methods for the management of Real-Time CORBA Threadpools and Mutexes, and to create instances of Real-Time CORBA Policies.

`RTCORBA::RTORB` is defined in IDL, as a locality constrained interface. Hence applications handle `RTCORBA::RTORB` by means of CORBA LocalObject References, using the C++ classes `RTCORBA::RTORB_ptr` and `RTCORBA::RTORB_var`.

Note

As stated in the *VisiBroker for C++ Developer's Guide*, to support Real-Time CORBA Extensions the VisiBroker for C++ ORB has to operate in a special 'real-time compatible' mode, the behavior and semantics of which differ from the regular mode of operation. Since obtaining an “RTORB” reference automatically puts the ORB in this special mode, you should obtain an “RTORB” reference as early as possible in your application code to avoid any possible inconsistency in behavior.

See “[RTCORBA::Mutex](#)”, “[RTCORBA::Priority](#)”, “[RTCORBA::ThreadpoolId](#)”, and “[RTCORBA::ThreadpoolPolicy](#)”. For details on the use of Real-Time CORBA Threadpools, see “Threadpools” in the *VisiBroker for C++ Developer's Guide*.

RTORB Creation and Destruction

The Real-Time ORB does not need to be explicitly initialized—it is initialized implicitly as part of the regular `CORBA::ORB_init` call.

To use the Real-Time ORB operations, the application must have a reference to the Real-Time ORB instance. This reference can be obtained any time after the call to `ORB_init`, and is obtained through the `resolve_initial_references` operation on `CORBA::ORB`, with the object ID string “RTORB” as the parameter. For details, see “Real-Time CORBA ORB” in the *VisiBroker for C++ Developer's Guide*.

IDL definition

```
// locality constrained interface
local interface RTORB {
    Mutex create_mutex();
    void destroy_mutex( in Mutex the_mutex );

    exception InvalidThreadpool {};

    ThreadpoolId create_threadpool (
        in unsigned long stacksize,
        in unsigned long static_threads,
        in unsigned long dynamic_threads,
        in Priority default_priority,
        in boolean allow_request_buffering,
        in unsigned long max_buffered_requests,
        in unsigned long max_request_buffer_size );

    void destroy_threadpool( in ThreadpoolId threadpool )
        raises (InvalidThreadpool);

    void threadpool_idle_time( in ThreadpoolId threadpool,
        in unsigned long seconds )
        raises (InvalidThreadpool);

    PriorityModelPolicy create_priority_model_policy(
        in PriorityModel priority_model,
        in Priority server_priority );

    ThreadpoolPolicy create_threadpool_policy(
        in ThreadpoolId threadpool );
};
```

RTORB Methods

```
Mutex_ptr create_mutex();
```

Creates a new Real-Time CORBA Mutex and returns a reference to it.

```
void destroy_mutex( Mutex_ptr _the_mutex );
```

Destroys a Real-Time CORBA Mutex.

Parameter	Description
<code>_the_mutex</code>	Reference of the mutex to destroy.

```

ThreadpoolId create_threadpool(
    CORBA::ULong _stacksize,
    CORBA::ULong _static_threads,
    CORBA::ULong _dynamic_threads,
    Priority _default_priority,
    CORBA::Boolean _allow_request_buffering = 0,
    CORBA::ULong _max_buffered_requests = 0,
    CORBA::ULong _max_request_buffer_size = 0 );

```

Creates a new Real-Time CORBA Threadpool with the specified configuration, and returns a `RTCORBA::ThreadpoolId` for it.

Parameter	Description
<code>_stacksize</code>	Stacksize, in bytes, for each thread in the Threadpool.
<code>_static_threads</code>	Number of threads to create at the time of Threadpool creation. This value can be zero, as long as <code>_dynamic_threads</code> is non-zero.
<code>_dynamic_threads</code>	Number of extra threads that can be created, if all the statically created threads are in use and more threads are required. This value can be zero (so that no more threads can be dynamically created), as long as <code>_static_threads</code> is non-zero.
<code>_allow_request_buffering</code>	Boolean flag to enable request buffering when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.
<code>_max_buffered_requests</code>	Maximum number of requests to buffer when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.
<code>_max_request_buffer_size</code>	Maximum amount of data to buffer, in bytes, when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.

```

void destroy_threadpool( ThreadpoolId _threadpool );

```

Destroys a Real-Time CORBA Threadpool. The Threadpool must not be in use by any Object Adapter, or the operation will fail, and a CORBA system exception is raised.

Parameter	Description
<code>_threadpool</code>	The ThreadpoolId of the Threadpool to destroy.

```

void threadpool_idle_time(
    ThreadpoolId _threadpool,
    CORBA::ULong _seconds );

```

Sets the time, in seconds, that dynamically allocated threads remain idle before they are garbage collected. Configured on a per-Threadpool basis. The default is to garbage collect dynamically allocated threads after 300 seconds.

This method is a proprietary VisiBroker extension.

Parameter	Description
<code>_threadpool</code>	The ThreadpoolId of the Threadpool to set the idle time for.
<code>_seconds</code>	The maximum number of seconds that a dynamically allocated thread can be idle in this Threadpool before it is destroyed. Statically allocated threads are not destroyed.

```
PriorityModelPolicy create_priority_model_policy(
    in PriorityModel _priority_model,
    in Priority _server_priority );
```

Creates an instance of the `RTCORBA::PriorityModelPolicy` policy object, for use in configuring one or more Real-Time POAs. See [“RTCORBA::PriorityModel”](#) and [“RTCORBA::PriorityModelPolicy”](#).

Parameter	Description
<code>_priority_model</code>	Either <code>RTCORBA::SERVER_DECLARED</code> for the Server Declared Priority Model, or <code>RTCORBA::CLIENT_PROPAGATED</code> for the Client Priority Propagation Model.
<code>_server_priority</code>	The maximum number of seconds that a dynamically allocated thread can be idle in this Threadpool before it is destroyed. Statically allocated threads are not destroyed.

```
ThreadpoolPolicy create_threadpool_policy(
    in ThreadpoolId _threadpool );
```

Creates an instance of the `RTCORBA::ThreadpoolPolicy` policy object, for use in configuring one or more Real-Time POAs.

Parameter	Description
<code>_threadpool</code>	The <code>ThreadpoolId</code> of the Threadpool to associate POA with.

RTCORBA::ThreadpoolId

```
typedef CORBA::ULong RTCORBA::ThreadpoolId
```

Values of the type `RTCORBA::ThreadpoolId` are used to identify Real-Time CORBA Thread-pools. A value of this type is returned from the `create_threadpool` method of `RTCORBA::RTORB`.

The ID can be used to initialize an instance of a Threadpool Policy, which in turn can be passed in to a call to `create_POA`, as a member of the `PolicyList` parameter, to configure a Real-Time POA. For details, see [“RTCORBA::RTORB”](#), [“RTCORBA::ThreadpoolPolicy”](#), and the section [“Association of an Object Adapter with a Threadpool”](#) in the *VisiBroker for C++ Developer's Guide*.

RTCORBA::ThreadpoolPolicy

```
class RTCORBA::ThreadpoolPolicy : public virtual
    CORBA::Policy, public virtual CORBA::LocalObject
```

An instance of this Real-Time Policy type is created by calling the `create_threadpool_policy` method of `RTCORBA::RTORB`. The Policy instance can then be used to configure a Real-Time POA at the time of its creation, by passing it into the `create_POA` method, as a member of the `Policy List` parameter. See [“RTCORBA::RTORB”](#), [“RTCORBA::ThreadpoolId”](#), and the section [“Association of an Object Adapter with a Threadpool”](#) in the *VisiBroker for C++ Developer's Guide* for more information.

IDL definition

```
local interface ThreadpoolPolicy : CORBA::Policy {
    readonly attribute ThreadpoolId threadpool;
};
```


Pluggable Transport Interface classes

This chapter describes the classes of the Pluggable Transport Interface provided by VisiBroker for C++. For information on how to implement support for a transport protocol via the VisiBroker Pluggable Transport Interface, see the chapter “VisiBroker Pluggable Transport Interface” in the *VisiBroker for C++ Developer's Guide*.

VSPTransConnection

This class is the abstract base class for a connection class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. Each instance of the derived class will represent a single connection between a server and a client. VisiBroker will request instances of this class be created (via the corresponding factory class, see “[virtual CORBA::Boolean waitNextMessage\(CORBA::ULong _timeout\) = 0;](#)”) on both the client and server side of the ORB, whenever a new connection is required.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransConnection methods

```
virtual void close() = 0;
```

To be implemented by the derived connection class. This method closes the connection in an orderly fashion. This method must be able to close the connection from either the client- or the server-side of a connection.

```
virtual void connect(CORBA::ULongLong _timeout) = 0;
```

To be implemented by the derived connection class. This method will be called by the client-side ORB, and must communicate with the remote peer's 'Listener' instance to setup a new connection on the server-side. The function does not return any error code, but should throw exceptions if any transport layer errors occur. Any exception may be thrown, including a CORBA User Exception, as the exception will be thrown back to the client CORBA application. `CORBA::TRANSIENT` is one possible exception that could be thrown.

The timeout value is in specified in milliseconds. A value of 0 means no timeout (block forever), and this is the default value, which is used unless the timeout is set through the VisiBroker QoS policy system. If the transport does not support timeouts on connect, it still can be used successfully. In this case the connect call must always block until the connection is established or has failed.

Parameter	Description
<code>_timeout</code>	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever).

```
virtual void flush() = 0;
```

To be implemented by the derived connection class. If this transport buffers data, this method should immediately send all data buffered for output, and block until the data is sent. Otherwise, there is nothing to be done and it can return immediately.

```
virtual IOP::ProfileValue_ptr getPeerProfile() = 0;
```

To be implemented by the derived connection class. This method should return a copy of the Profile describing the peer endpoint used in this connection. The copy must be created on the heap and the caller is responsible for releasing the used memory. The Profile does not describe the actual connection for this instance, but the Profile of the 'Listener' endpoint used during the 'connect' call.

```
virtual CORBA::Long id() = 0;
```

To be implemented by the derived connection class. This method must return a unique number for each connection instance. The ID only needs to be unique for this transport. It is used to lookup/locate a connection instance during request dispatching for this transport.

```
virtual CORBA::Boolean isBridgeSignalling() = 0;
```

To be implemented by the derived connection class. This method is used to indicate to the ORB which worker thread 'cooling' strategy is to be used. If the method returns 0 (FALSE), it means that the protocol plug-in itself is going to handle the re-reading of the connection after a request has been read. This is only possible if the plug-in is capable of doing a blocking read with timeout on the protocol endpoint. If it cannot or chooses not to, this method should return 1 (TRUE), and the transport bridge will notify the thread if another request becomes available or the when the timeout is reached. Note that thread cooling only occurs if a cooling time is configured for that protocol instance.

```
virtual CORBA::Boolean isConnected() = 0;
```

To be implemented by the derived connection class. This method should return 1 (TRUE), if the remote peer is still connected. If the connection was closed by the peer or any error condition exists that prevents the use of this connection, it must return 0 (FALSE).

```
virtual CORBA::Boolean isDataAvailable() = 0;
```

To be implemented by the derived connection class. This method should return 1 (TRUE), if data is ready to be read from the connection. Otherwise, it should return 0 (FALSE).

```
virtual CORBA::Boolean no_callback() = 0;
```

To be implemented by the derived connection class. This method indicates whether a connection of this transport can be used to reverse the client/server setup and call back to a servant in the client code. It should return 0 (FALSE) if it can not, which will cause the ORB to create a new connection for this kind of call, or 1 (TRUE) if it can.

This feature is provided to support Bi-Directional IIOP, that was introduced in GIOP-1.2. See the CORBA specification for details.

```
virtual void read(CORBA::Boolean _isFirst,
    CORBA::Boolean _isLast, char* _data, CORBA::ULong
    _offset, CORBA::ULong _length, CORBA::ULongLong
    _timeout) = 0;
```

To be implemented by the derived connection class. This method reads data from the connection. It does not return any error code, but must signal transport related errors by throwing exceptions. The arguments describe a byte array with a given length that needs to be filled. This function must either fill the complete byte array successfully, timeout, or throw an exception.

The timeout parameter's value defaults to 0 unless the user sets it through the VisiBroker QoS policies. A value of 0 indicates no timeout, and hence that the read should block forever waiting for data. Therefore, if this transport does not support timeouts on read/write, it still can be used successfully. In this case the read call must always block until all data has arrived.

Parameter	Description
_isFirst	TRUE if this is the first time data is being read from the connection.
_isLast	TRUE if this is the last time data is being read from the connection.
_data	Byte array to read data into.
_offset	Offset into the array at which to start storing the read data.
_length	The number of bytes of data to be read.
_timeout	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever)

```
virtual void setupProfile(const char* prefix,
    VISPTransProfileBase_ptr peer) = 0;
```

To be implemented by the derived connection class. This method is used to tell a newly created client-side connection object what peer it should try to connect to in later steps (when connect() is called.) The given VISPTransProfileBase_ptr base class should be cast to the Profile class type of the particular transport and all member data in the connection should be initialized from that instance. A prefix string is also passed, for property lookup, in case additional property parameters need to be read.

Parameter	Description
prefix	String prefix of the form "vbroker.se.<SE_name>.scm.<SCM_name>" that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure this instance.
peer	Profile for the Listening endpoint that this connection will connect to. Given as an instance of this protocol's Profile class, passed as a pointer to the base VISPTransProfile class.

```
virtual CORBA::Boolean waitNextMessage(CORBA::ULong
    _timeout) = 0;
```

To be implemented by the derived connection class. This method should block the calling thread until either data has arrived on this connection or the given timeout (in milliseconds) has expired. It should return 1 (TRUE) if data is available, or 0 (FALSE) if not. Note that a value of 0 for the _timeout parameter should never occur (as in this case the ORB should

not call this method). Therefore receiving this value should be handled as an error, perhaps by logging an error message.

Parameter	Description
<code>_timeout</code>	Maximum amount of time to wait for a message (in seconds). 0 means wait forever.

```
virtual void write(CORBA::Boolean _isFirst,  
                 CORBA::Boolean _isLast, char* _data, CORBA::ULong  
                 _offset, CORBA::ULong _length, CORBA::ULongLong  
                 _timeout) = 0;
```

To be implemented by the derived connection class. This method sends data through the connection to the remote peer. It does not return any error code, but must signal transport related errors by throwing exceptions. The arguments describe a byte array with a given length that needs to be sent. This function must either send the complete byte array successfully, timeout, or throw an exception. The timeout parameter's value defaults to 0 unless the user sets it through the VisiBroker QoS policies. A value of 0 indicates no timeout, and hence that the write should block forever waiting for data. Therefore, if this transport does not support timeouts on read/write, it still can be used successfully. In this case the write call must always block until all data has arrived.

Parameter	Description
<code>_isFirst</code>	TRUE if this is the first time data is being sent through the connection.
<code>_isLast</code>	TRUE if this is the last time data is being sent through the connection.
<code>_data</code>	Byte array of data that needs to be sent.
<code>_offset</code>	Offset from the array into which to start storing the read data.
<code>_length</code>	The number of bytes of data to be sent.
<code>_timeout</code>	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever)

VISPTransConnectionFactory

This class is the abstract base class for a connection factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the “[VISPTransRegistrar](#)” class. The ORB calls the connection factory object to create instances of the connection class of the associated transport. The connection class is the corresponding class derived from class “[VSPTransConnection](#)”.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransConnectionFactory methods

```
VISPTransConnection_ptr create(const char* prefix) = 0;
```

To be implemented by the derived connection factory class. This method creates a new instance of the corresponding connection class and returns

the pointer to it cast to the base class type. The caller is responsible for the destruction of the instance when it is no longer required.

Parameter	Description
prefix	String prefix of the form "vbroker.se.<SE_name>.scm.<SCM_name>" that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure the connection factory.

VISPTransListener

This class is the abstract base class for a listener factory that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. Instances of the derived class are created each time a Server Engine is created that includes Server Connection Managers ('SCMs') that specify the particular transport protocol. One instance is created per SCM instance that specifies the protocol. The listener instances are used by the server-side ORB to wait for incoming connections and requests from clients. New connections and requests on existing connections are signaled by the listener to the ORB via the Pluggable Transport Interface's Bridge class (see "VISPTransBridge"). When a request is received on an existing connection, the connection goes through a 'Dispatch Cycle'. The Dispatch Cycle starts when the connection delivers data to the transport layer. In this initial state, the arrival of this data must be signaled to the ORB via the Bridge and then the Listener ignores the connection until the Dispatch process is completed (in the mean time, the connection is said to be in the 'dispatch state'). The connection is returned to the initial state when the ORB makes a call to the Listener's `completedData()` method. During the dispatch state the ORB will read directly from the connection until all requests are exhausted, avoiding any overhead incurred by the Bridge-Listener communication. In most cases, the transport layer uses blocking calls that wait for new connections. In order to handle this situation, the Listener should be made a subclass of the class `VISThread` and start a separate thread of execution that can be blocked without holding up the whole ORB.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransListener methods

```
virtual void completedData(CORBA::Long id) = 0;
```

To be implemented by the derived listener class. This method is called when the ORB has completed reading a request from the connection with the given `id` and wants the Listener once again to signal any new incoming requests on that connection (via the Bridge).

Parameter	Description
<code>id</code>	Id of the connection that may once again be listened on.

```
virtual void destroy() = 0;
```

To be implemented by the derived listener class. This method instructs the Listener instance to tear down its endpoint and close all related active connections.

```
virtual IOP::ProfileValue_ptr getListenerProfile() = 0;
```

To be implemented by the derived listener class. This method should return the Profile describing the Listener instance's endpoint on this transport. The returned Profile should be a copy on the heap and the caller (the ORB) takes over memory management of it.

```
virtual CORBA::Boolean isDataAvailable(CORBA::Long id) = 0;
```

To be implemented by the derived connection factory class. This method should return 1 (TRUE), if the connection with the given Id has data ready to be read. Returns 0 (FALSE) otherwise. Normally the call should just be forwarded to the transport layer to find out.

Parameter	Description
-----------	-------------

id	Id of the connection that should be queried to see if data is available.
----	--

```
virtual void setBridge(VISPTransBridge* up) = 0;
```

To be implemented by the derived listener class. This method establishes the 'link' to the Pluggable Transport Bridge instance to be used by this Listener instance. The pointer it passes to the Listener should be stored to allow 'upcalls' to be made into ORB when necessary.

Parameter	Description
-----------	-------------

up	Pointer to the Pluggable Transport Bridge instance that the Listener instance should use to communicate with the ORB.
----	---

VISPTransListenerFactory

This class is the abstract base class for a listener factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the VISPTransRegistrar class. The ORB calls this object to create instances of the listener class of the associated transport. The listener class is the corresponding class derived from class VISPTransListener, as described in "[VISPTransListener](#)".

Include file

The `vptrans.h` file should be included to use this class.

VISPTransListenerFactory methods

```
VISPTransListener_ptr create(const char* propPrefix) = 0;
```

To be implemented by the derived listener factory class. This method creates a new instance of the corresponding listener class and returns the

pointer to it cast to the base class type. The caller (the ORB) is responsible for the destruction of the instance when it is no longer required.

Parameter	Description
propPrefix	String prefix of the form "vbroker.se.<SE_name>.scm.<SCM_name>" that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure the listener instance or the particular listener instance that is being created. Note that the factory can pass the prefix into the constructor of the listener instance it is creating, to allow it to read properties itself. This would require the derived listener class to have a constructor that takes the prefix as a parameter.

VISPTransProfileBase

```
class VISPTransProfileBase : public  
    GIOP::ProfileBodyValue, public  
    CORBA_DefaultValueRefCountBase
```

This class is the abstract base class for a Profile class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. This class provides the functionality to convert between a transport specific endpoint description and an CORBA IOP based IOR that can be exchanged with other CORBA implementations. It is also used during the process of binding a client to a server, by passing a ProfileValue to a 'parsing' function that has to return TRUE or FALSE, to determine whether a particular IOR is usable for this transport or not. An instance of the derived Profile class is frequently passed to functions via a pointer to its base class type. In order to support safe runtime downcasting with any C++ compiler, a '_downcast' function must be provided that can test if the cast is legal or not.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransProfileBase methods

```
static GIOP::ObjectKey* convert(const  
    PortableServer::ObjectId& seq);
```

Converts octet sequence representation of an Object Key into the in-memory representation.

Parameter	Description
seq	Octet sequence version of Object Key, to be converted into in-memory representation.

```
void object_key(GIOP::ObjectKey_ptr k);
```

Set the Object Key for this Profile instance.

Parameter	Description
k	Object Key.

```
GIOP::ObjectKey_var object_key() const;
```

Get the Object Key for this Profile instance.

```
void version(const GIOP::Version& v);
```

Set the GIOP version for this Profile.

Parameter	Description
-----------	-------------

v	GIOP Version.
---	---------------

```
GIOP::Version& version();
```

Get the GIOP version of this Profile.

```
const GIOP::Version& version() const;
```

Get the GIOP version of this Profile.

```
static const VISValueInfo& _info();
```

Get the VisiBroker ValueInfo for this Profile type.

VISPTTransProfileBase members

```
static const VISValueInfo& _stat_info;
```

Stores the VisiBroker ValueInfo for this particular Profile type.

VISPTTransProfileBase base class methods

```
IOP::ProfileValue_ptr copy()
```

To be implemented by the derived listener factory class. This method should make an exact copy on the free store and return a pointer to it. It is good coding practice to use the copy constructor inside of this function.

```
CORBA::Boolean matchesTemplate(IOP::ProfileValue_ptr  
  body);
```

To be implemented by the derived Profile class. This method should return 1 (TRUE) if there is an IOR in the given data, that can be used to connect through this transport. Otherwise return 0 (FALSE).

Parameter	Description
-----------	-------------

body	Profile to be checked, to see if it can be used by this transport.
------	--

```
IOP::ProfileId tag()
```

To be implemented by the derived Profile class. This method should return the unique tag value for this Profile.

```
IOP::TaggedProfile* toTaggedProfile();
```

To be implemented by the derived Profile class. This method should return a tagged (stringified) Profile instance created with the values read from this instance's member data.


```
static VISPTransProfileBase*
    _downcast(CORBA::ValueBase* vbptr);
```

To be implemented by the derived Profile class. Function to downcast a base class pointer to an instance of this Profile class.

Parameter	Description
vbptr	Profile instance passed as base Value type pointer.

```
virtual void* _safe_downcast(const VISValueInfo &info)
    const;
```

To be implemented by the derived listener factory class. Virtual method called by ORB during downcast, to check type info data.

Parameter	Description
info	VisiBroker Value Info for this Profile type.

VISPTransProfileFactory

This class is the abstract base class for a Profile factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the VISPTransRegistrar class. The ORB calls this object to create instances of the Profile class of the associated transport. The Profile class is the corresponding class derived from class VISPTransProfileBase, as described in [“VISPTransProfileBase”](#).

Include file

The `vptrans.h` file should be included to use this class.

VISPTransProfileFactory methods

```
IOP::ProfileValue_ptr create(const IOP::TaggedProfile&
    profile)
```

Read the tagged IOR and create a Profile describing a Listener endpoint.

Parameter	Description
profile	CDR encoded IOR to be read.

```
CORBA::ULong hash(VISPTransProfileBase_ptr prof);
```

Support the optimized storage of profiles in a hashed lookup table by calculating a hash number for the given instance. Return 0 if you do not provide hash values.

Parameter	Description
prof	Profile instance to produce hash value for.

```
IOP::ProfileId getTag();
```

Return the unique Profile Id tag for the type of Profile created by this factory.

VISPTransBridge

This class provides a generic interface between the transport classes and the ORB. It provides methods to signal various events occurring in the transport layer.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransBridge methods

```
CORBA::Boolean addInput(VISPTransConnection_ptr con);
```

Send a connection request to the ORB through the bridge, by passing a pointer to the Connection instance representing the Listener endpoint. The returned flag signals whether the ORB has accepted the new connection (returns 1 (TRUE)) or refused it (returns 0 (FALSE)). The latter might happen due to resource constraints or due to a restriction on connections (set up through the property system).

Members	Description
<code>con</code>	Connection object representing the Listener endpoint you wish to connect to.

```
void signalDataAvailable(CORBA::Long conId);
```

Passes the connection id to the ORB of a connection that just got new data from the transport layer. This will start the dispatch cycle for incoming requests.

Members	Description
<code>conId</code>	Connection Id of connection you want to indicate data is available on.

```
void closedByPeer(CORBA::Long conId);
```

Tell the ORB that the connection with the given id was closed by the remote peer.

Members	Description
<code>conId</code>	Connection Id of the connection you want to indicate was closed by the remote peer.

VISPTransRegistrar

This class must be used to register a new transport with the ORB. The protocol name string given during registration is used as identifier of this transport and must be unique in the scope of that ORB. It is also used as a prefix in the name string of properties related to this transport.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransRegistrar methods

```
static void addTransport(const char* protocolName,  
    VISPTransConnectionFactory* connFac,  
    VISPTransListenerFactory* listFac,  
    VISPTransProfileFactory* profFac);
```

Register the protocol name string and the three Factory instances used to create specific classes for this transport. This method is static and can therefore be called at any time during the initialization of the ORB.

Members	Description
<code>protocolName</code>	Name to be used to identify this transport protocol.
<code>connFac</code>	Pointer to singleton instance of the connection factory.
<code>listFac</code>	Pointer to singleton instance of the listener factory.
<code>profFac</code>	Pointer to singleton instance of the profile factory.

VisiBroker for C++ Logging

This chapter describes the classes that support VisiBroker for C++ logging.

VISDLoggerMgr

This class is a bootstrap class into the functionality provided by the logging library `vdlog`.

Include file

Include the `vdlog.h` file when you use this class.

VISDLoggerMgr methods

```
static VISDLoggerMgr_ptr instance();
```

Static function to access a singleton instance of `VISDLoggerMgr`.

```
CORBA::Boolean global_log_enabled();
```

Returns `true` if the global log switch is enabled, else `false`.

```
void global_log_enabled(CORBA::Boolean b);
```

Setter method for the global log level switch.

Parameter	Description
<code>b</code>	Boolean value to enable or disable the global log level switch.

```
VISDLogLevel::Level global_log_level();
```

Returns the current global log level (verbosity) setting on the log manager.

```
void global_log_level(VISDLogLevel::Level l);
```

Setter for the global log level on the log manager.

Parameter	Description
<code>l</code>	Global verbosity setting.

```
VISDLogger_ptr get_default_logger();
```

Returns the default logger. If not created, creates and returns. The name of the returned logger is "default".

```

VISDLogger_ptr get_logger(const char* name,
    VISDAppender_ptr* apps = NULL, CORBA::Short num_apps
    = 0);

```

Creates (if not created) and returns a logger with the given name.

Parameter	Description
name	Input name of the logger.
apps	Pointer to an array of appender pointers indicating an initial list of appenders for the logger.
num_apps	Number of appenders in the array of appender pointer.

```

void register_app_factory(VISDAppenderFactory* fac);

```

API for custom appender factories to register themselves with the logger framework. Factory will be added to a dictionary of appender factories indexed by its name. If a factory is not registered with the framework, then an instance of its type cannot be created.

Parameter	Description
fac	Appender factory to be registered.

```

VISDAppender_ptr create_app(const char* logger_name,
    VISDConfig::LogAppenderConfig_ptr p);

```

API to create an appender for the logger specified by its name using the configuration information pointed.

Parameter	Description
logger_name	Name of the logger for which the appender instance is to be created.
p	Pointer to the logger appender instance configuration.

```

void register_lyt_factory(VISDLayoutFactory* fact);

```

API for custom layout factories to register themselves with the logger framework.

Parameter	Description
fact	Pointer to the implemented layout factory to be registered.

```

VISDLayout_ptr create_lyt(const char* logger_name,
    VISDConfig::LogAppenderConfig_ptr p);

```

API to create a layout instance.

Parameter	Description
logger_name	Name of the logger in which the appender instance is associated which needs to use the layout.
p	Pointer to the logger appender instance configuration.

VISDLogger

Class providing the logging interface.

Include file

Include the `vdlog.h` file when you use this class.

VISDLogger methods

```
const char* name() const;
```

Returns the name of the logger object.

```
void log(VISDLogLevel::Level level, const char*  
        component, const char* message, const char  
        *sourcefile = NULL, CORBA::ULong linenum = 0, const  
        void *bindata = NULL, size_t binsize = 0)
```

API to log messages.

Parameter	Description
level	Log level of the logged message.
component	Source name from where the message is being logged. The source name is the logical module name that can be useful during filtering.
message	Logged message data.
sourcefile	Source file name from where the message is being logged.
linenum	Source file line number from where the message is being logged.
bindata	Binary data pointer.
binsize	Size of any binary data.

VISDAppenderFactory

Interface for appender factory implementations to implement. The logger framework calls on this interface for appender instance creation.

Include file

Include the `vdlog.h` file when you use this class.

VISDAppenderFactory methods

```
virtual const char* type_name() = 0;
```

This method is invoked by the logger framework when it needs to know the type of the factory. For example, when a factory registers itself with the logger manager, this API is called to get the type name. The type name identifies the type of destination to which its appenders will forward the log. Type names "stdout", "rolling" and others as mentioned in the developer guide are restricted from usage. Should return back a unique type name for the appender type.

```
virtual VISDAppender_ptr create(const char*
    logger_name, VISDConfig::LogAppenderConfig_ptr p) =
    0;
```

This method is invoked by the logger framework when it needs to create an instance of the appender supported by this factory. The return value should be an instance of desired appender.

Parameter	Description
logger_name	Name of the logger with which the appender instance is to be associated.
p	Pointer to the logger's appender instance configuration.

```
virtual void destroy(VISDAppender_ptr p) = 0;
```

This method is invoked by the logger framework when it is done with using the appender instance. The API is supposed to remove all resources dedicated to the appender instance when it was created.

Parameter	Description
p	Pointer to the appender instance that is to be destroyed.

VISDAppender

```
class VISDAppender : public VISResource
```

Interface providing the appender interface. The logger object uses this interface to log to specific destinations.

Include file

Include the `vdlog.h` file when you use this class.

VISDAppender methods

```
virtual VISDAppenderFactory* factory() = 0;
```

Should return the associated factory object which created this appender instance.

```
virtual CORBA::Boolean append(const VISDLogRecord&
    record) = 0;
```

API used by the logger to forward the log message to a specific destination. The log record abstracts the complete log message. On successful completion of forwarding, the API should return `TRUE`.

Parameter	Description
record	The log record to be appended to the destination.

```
virtual CORBA::Boolean ORB_initialized(void* orb_ptr) =
    0;
```

This is a notification from the ORB that it has initialized. If an appender is going to use any of the ORB functionality, then it needs to wait for this notification and return back `TRUE`. Otherwise, it should return back `FALSE`.

After this notification, the appender can start using any of the ORB interfaces.

Parameter	Description
orb_ptr	Reference to the ORB.

```
virtual void ORB_shutdown() = 0;
```

This is a notification from the ORB that it is shutting down. If the appender is using any ORB functionality, then it needs to stop using that after this notification.

VISDLayoutFactory

Interface for layout factory implementations to implement. The logger framework calls on this interface for layout instance creation.

Include file

Include the `vdlog.h` file when you use this class.

VISDLayoutFactory methods

```
virtual const char* type_name() = 0;
```

Returns the type name of the layout that this factory will create.

```
virtual VISDLayout_ptr create(const char* logger_name,  
    VISDConfig::LogAppenderConfig_ptr p) = 0;
```

Should creates a layout instance. This API is called by the logger framework when an instance of the layout is desired.

Parameter	Description
logger_name	Name of the logger whose associated appender instance needs this layout instance.
p	Pointer to the logger's appender instance configuration.

```
virtual void destroy(VISDLayout_ptr layout) = 0;
```

Framework calls this API when it is done with usage of the layout and needs to factory to destroy the instance.

Parameter	Description
layout	Pointer to the layout instance that needs to be destroyed.

VISDLayout

```
class VISDLayout : public VISResource
```

Interface which all layout instances should implement. Appenders which desire to format the log message before outputting to the desired destination will make use of this interface.

Include file

Include the `vdlog.h` file when you use this class.

VISDLayout methods

```
virtual VISDLayoutFactory* factory() = 0;
```

Should return the factory of the layout instance that created it.

```
virtual void format(const VISDLogRecord& record, char*  
    buf, CORBA::ULong buf_size, CORBA::String_var&  
    other_buf) = 0;
```

API that is called by the appender instances for formatting the log record. The appender allocates buffer and sends the buffer into this API and expects the layout to format the message and set in this buffer. However, if the layout wants more memory than that has been sent to it by the appender, then it can itself allocate memory and make use of `other_buf`.

Parameter	Description
<code>record</code>	Log record containing the log message.
<code>buf</code>	Memory buffer sent by the appender onto which the layout can set the formatted message.
<code>buf_size</code>	Size of the memory buffer sent in by the appender.
<code>other_buffer</code>	If the layout needs more memory than that sent by the appender, then it can allocate memory into this buffer and set the formatted text into it.

VISDConfig

Namespace class for configuration structures.

Include file

Include the `vdlog.h` file when you use this class.

LogAppenderConfig structure

```
struct LogAppenderConfig {  
    CORBA::String_var appender_name;  
    CORBA::String_var appender_type;  
    CORBA::String_var layout_type;  
};  
typedef LogAppenderConfig* LogAppenderConfig_ptr;
```

This structure contains a single appender instance configuration on a logger. This is filled and passed to the factory interfaces by the logger framework after reading from the configurations.

Parameter	Description
<code>appender_name</code>	Name of the appender instance configured on the logger.

Parameter	Description
appender_type	The type name of the appender instance. This implies which appender factory needs to be used.
layout_type	The type name of the layout instance desired. Again this implies which layout factory should be used to obtain layout instance.

VISDLogRecord

Class abstracting a log message. Apart from the actual log message, it also captures various other states such as thread id, timestamp parameter, and others.

Include file

Include the `vdlog.h` file when you use this class.

VISDLogRecord methods

Timestamp **get_timestamp()** const;

Returns the timestamp of the log record.

CORBA::ULong **get_seq_number()** const;

Returns a sequence number if many log records are logged at the same time interval.

CORBA::ULong **get_process_id()** const;

Returns the process id.

CORBA::ULong **get_thread_id()** const;

Returns the thread id of the thread that logged this message.

const char* **get_thread_name()** const;

If the thread is named, then it returns the thread name.

const char* **get_logger_name()** const;

Returns the logger object's name.

VISDLogLevel::Level **get_log_level()** const;

Returns the verbosity of the logged message.

const char* **get_component_name()** const;

Returns the source name of the source that logged the message.

const char* **get_filename()** const;

Returns the name of the file that logged the message.

CORBA::ULong **get_line_number()** const;

Returns the line number in the file from where the log message is emanating.

```
const char* get_message() const;
```

This is the actual logged message.

```
const unsigned char* get_bindata() const;
```

Returns any binary data that is piggybacking on the log record.

```
size_t get_binsize() const;
```

Returns the size of the binary data.

VISDLogLevel

Class enclosing the verbosity enumeration Level.

Include file

Include the `vdlog.h` file when you use this class.

Level enumeration

```
enum Level {  
    OFF_ = 1000,  
    EMERG_ = 800,  
    EXCEP_ = 800,  
    FATAL_ = 800,  
    ALERT_ = 700,  
    CRIT_ = 600,  
    ERROR_ = 500,  
    WARN_ = 400,  
    NOTICE_ = 300,  
    INFO_ = 200,  
    DEBUG_ = 100,  
    ALL_ = 0,  
    DEFAULT_ = -1  
};
```

Index

Symbols

- _POA class 6
- _tie_ class 6
- _var class 6
- ... ellipsis 2
- symbols
 - square brackets 2
 - | vertical bar 2

A

- accessing
 - system exceptions 62
 - the interface repository 106
 - user exceptions 62
- ActiveObjectLifecycleInterceptor class 244
- ActiveObjectLifecycleInterceptorManager class 245
- Adapter activators 7
- AdaptorActivator methods 7
- Agent
 - methods 274
- agent class 273
- AliasDef 81
 - class 81
 - methods 81
- all_repository_ids 274
- Any 49, 65
 - class 49
 - extraction operators 50
 - initialization operators 50
 - methods 49
- arguments
 - ORBid 231
 - ORBServerId 231
- ArrayDef 81
 - class 81
 - methods 81
- AttributeDef 82
 - class 82
- AttributeDescription 83
 - class 83
- AttributeMode 83
 - class 83

B

- BAD_INV_ORDER
 - ClientRequestInfo 209
 - Current methods 215
 - ORBInitInfo 223
 - ServerRequestInfo 230
- BAD_PARAM
 - ClientRequestInfo 209
 - IORInfo 218
- Basic Object Adaptor (see BOA) 9
- bind options
 - connection_timeout 8
 - defer_bind 8
 - enable_rebind 8
 - max_bind_retries 8

- receive_timeout 8
- send_timeout 8
- Binding 132
 - class 132
- binding clients to objects 17
- Binding structure 132
- BindingIterator
 - class 132
 - methods 133
- BindingList
 - class 132
- BindingList sequence 132
- BindInterceptor 239
- BindInterceptorManager
 - class 240
- BindOptions 7
 - struct 7
- BOA 9
 - include file 117, 119, 122, 123
 - methods 9
 - VisiBroker extensions 13
- brackets 2

C

- C++ language exceptions 62
- ChainUntypedObjectWrapperFactory 250
 - class 250
- class
 - _POA_ 6
 - _tie_ 6
 - _var 6
 - ActiveObjectLifecycleInterceptor 244
 - ActiveObjectLifecycleInterceptorManager 245
 - agent 273
 - AliasDef 81
 - Any 49, 65
 - ArrayDef 81
 - AttributeDef 82
 - AttributeDescription 83
 - AttributeMode 83
 - BindingBindingList 132
 - BindingIterator 132
 - BindingList 132
 - BindInterceptor 239
 - BindInterceptorManager 240
 - BOA 9
 - ChainUntypedObjectWrapperFactory 250
 - ClientInterceptor 241
 - ClientRequestInceptorManager 242
 - ClientRequestInfo 208
 - ClientRequestInterceptor 210
 - Codec 212
 - CodecFactory 214
 - CompletionStatus 13
 - ConstantDef 83
 - ConstantDescription 84
 - Contained 85, 86, 100, 101
 - Container 86, 100
 - Context 14

ContextList 51
CORBA::Object 254
CORBA::PolicyCurrent 254
CORBA::PolicyManager 253
Current 215
DuplicateName 223
DynamicImplementation 53
DynAny 53
DynAnyFactory 57
DynArray 57
DynEnum 58
DynSequence 59
DynStruct 60
DynUnion 61
EnumDef 93
Environment 62
Exception 17, 45, 47
ExceptionDef 93
ExceptionList 63, 216
ExtendedNamingContextFactory 135
Fail 278
FixedDef 94
FormatMismatch 213
ForwardRequest 217
IDLType 96, 100
Interceptor 217
InterceptorManager 238
InterceptorManagerControl 238
interface_name 5
InterfaceDef 97
InvalidName 223
InvalidTypeForEncoding 213
IORCreationInterceptor 247
IORInfo 218
IORInfoExt 220
IORInterceptor 220
IRObject 100
MarshalInBuffer 265, 269
MarshalOutBuffer 265, 269
Messaging::RebindPolicy 256
ModuleDef 100
ModuleDescription 100
NamedValue 65
NamingContext 125
NamingContextExt 130
NamingContextFactory 133
NativeDef 101
NVList 14, 65, 66
Object 17
ObjectStatus 122
ObjectStatusList 122
ObjectWrapper 5
OperationDef 101
ORB 22
ORBInitializer 222
ORBInitInfo 223
ParameterList 226
POA 29
POALifeCycleInterceptor 243
POALifeCycleInterceptorManager 244
PolicyFactory 226
PrimitiveDef 105
QoSExt::DeferBindPolicy 257
Repository 106
Request 69, 72, 76
RequestInfo 227
RTCORBA
 PriorityMapping 289
RTCORBA::Current 286
RTCORBA::Mutex 287
RTCORBA::NativePriority 288
RTCORBA::Priority 288
RTCORBA::PriorityModel 291
RTCORBA::PriorityModelPolicy 292
RTCORBA::RTORB 292
RTCORBA::ThreadpoolId 295
RTCORBA::ThreadpoolPolicy 295
Seq 280
SeqSeq 281
SequenceDef 107
ServantActivator 42
ServantLocator 44
ServantManager 45
ServerRequestInfo 230
ServerRequestInterceptor 233, 246
ServerRequestInterceptorManager 247
StringDef 108, 110
StructDef 108
SystemException 45, 47
TriggerHandler 279
TypedefDef 109
TypeMismatch 213
UnionDef 110
UnknownEncoding 214
UntypedObjectWrapper 251
ValueBoxDef 111
ValueDef 111
VISClientInterceptor 243, 244, 245, 246,
 247, 248
VISClosure 249
VISClosureData 250
VISDAppender 312
VISDAppenderFactory 311
VISDConfig 314
VISDLayout 313
VISDLayoutFactory 313
VISDLogger 310
VISDLoggerMgr 309
VISDLogLevel 316
VISDLogRecord 315
VISInit 283
VISPTransBridge 306
VISPTransConnectionFactory 300
VISPTransListener 301
VISPTransListenerFactory 302
VISPTransProfileBase 303
VISPTransProfileFactory 305
VISPTransRegistrar 307
VSPTransConnection 297
WstringDef 114
classes 207
ClientInterceptor 241
ClientRequestInfo

- BAD_INV_ORDER 209
- BAD_PARAM 209
 - class 208
 - exceptions 209
 - INV_POLICY 209
 - methods 209
- ClientRequestInterceptor
 - class 210
 - exceptions 211
 - ForwardRequest 211
 - methods 211
- ClientRequestInterceptorManager
 - class 242
- Codec
 - class 212
 - exceptions 213
 - FormatMismatch 213
 - InvalidTypeForEncoding 213
 - members 213
 - methods 213
- Codec encoding
 - struct 216
- CodecFactory
 - class 214
 - exceptions 214
 - UnknownEncoding 214
- commands
 - conventions 2
- COMPLETED_MAYBE 14
- COMPLETED_NO 14
- COMPLETED_YES 14
- CompletionStatus 13
- ConstantDef 83
 - class 83
- ConstantDescription
 - class 84
- ConsumerAdmin
 - interface 137
 - method 137
- Contained 85, 100, 101
 - methods 85
- Container 86, 100
 - methods 87
- containment hierarchy 86
- Context 14
 - class 14
 - include file 14
 - methods 14
- Context_var class 14
- ContextList
 - class 51
- CORBA
 - BOA
 - methods 9
- Current
 - class 16, 215
 - methods 16, 215
- Current methods
 - BAD_INV_ORDER 215
 - exceptions 215
 - InvalidSlot 215

D

- deactivating
 - object implementations 9
- DeferBindPolicy
 - class 257
- defining
 - an ORB object's interface 97
- DefinitionKind 92
 - enum 92
- delegation implementations 6
- deriving
 - Interface Repository objects 85
- Desc
 - structure 277
- documentation
 - .pdf format 3
 - accessing Help Topics 1
 - platform conventions used in 2
 - type conventions used in 2
 - updates on the web 3
- DuplicateName
 - class 223
 - ORBInitInfo 223
- dynamic interfaces 49
- DynamicImplementation 53
 - class 53
 - methods 53
- DynAny 53
 - class 53
 - methods 54
 - usage restrictions 54
- DynAnyFactory
 - class 57
- DynArray 57
 - class 57
 - methods 57
 - usage restrictions 57
- DynEnum 58
 - class 58
 - methods 58
 - usage restrictions 58, 61
- DynSequence 59
 - class 59
 - methods 60
 - usage restrictions 59
- DynStruct 60
 - class 60
 - methods 60
 - usage restrictions 60
- DynUnion 61
 - class 61
 - methods 61

E

- encoding
 - members 216
 - struct 216
 - supported 216
- enum
 - DefinitionKind 92
 - OperationMode 104

- ParameterMode 104
- PrimitiveKind 105
- EnumDef 93
 - class 93
- enumeration
 - AttributeMode 83
 - DefinitionKind 92
 - OperationMode 104
 - ParameterMode 104
 - PrimitiveKind 105
 - TCKind 75
- Environment 62
 - methods 63
- event handlers
 - interfaces 125, 137
- EventChannel
 - interface 137
 - methods 138
- EventChannelFactory
 - interface 138
 - methods 139
- Exception 45, 47
 - class 17
- ExceptionDef 93
- ExceptionDescription 94
 - structure 94
- ExceptionList
 - class 63, 216
- exceptions
 - BAD_INV_ORDER 231
 - BAD_PARAM 227
 - CodecFactory 214
 - DuplicateName 223
 - FormatMismatch 213
 - ForwardRequest 217, 233
 - INV_POLICY 231
 - InvalidName 223
 - InvalidSlot 227, 231
 - InvalidTypeForEncoding 213
 - IORInfo 218
 - NO_RESOURCES 233
 - ORBInitInfo 223
 - TypeMismatch 213
 - UNKNOWN 231
- extended methods
 - BOA 13
- ExtendedNamingContextFactory
 - class 135
 - methods 135

F

- Fail class 278
- FixedDef
 - class 94
- FormatMismatch
 - class 213
 - Codec 213
- ForwardRequest
 - class 217
 - ClientRequestInterceptor 211
 - exceptions 217

- FullInterfaceDescription 94
 - structure 94
- FullValueDescription
 - structure 95

G

- generated classes 5
 - _sk_ 6
 - _st_ 5
 - _tie_ 6
 - _var 6
- GLOBAL_SCOPE 9

H

- Help Topics
 - accessing 1

I

- IDL
 - OAD 117
- IDLType 96, 100
 - include file 96
 - methods 97
- IIOP structure
 - ProfileBody 261
- ImplementationStatus struct 117
- include file
 - BOA 117, 119, 122, 123
 - Context 14
 - IDLType 96
- interception points
 - receive_exception 211
 - receive_other 211
 - receive_reply 211
 - receive_request 233
 - receive_request_service_contexts 233
 - send_exception 233
 - send_other 233
 - send_poll 211
 - send_reply 233
 - send_request 211
- Interceptor
 - class 217
 - methods 217
- interceptor_c.hh 247
- InterceptorManager
 - class 238
- InterceptorManagerControl
 - class 238
- interceptors
 - client request 210
 - IOR 220
 - server request 233
- Interface Repository
 - classes 81
- interface_name class 5
- InterfaceDef 97
 - methods 98
- InterfaceDescription
 - structure 99
- interfaces

- ConsumerAdmin 137
- EventChannel 137
- EventChannelFactory 138
- OAD 117
- ProxyPullConsumer 139
- ProxyPullSupplier 140
- ProxyPushConsumer 140
- ProxyPushSupplier 140
- PullConsumer 141
- PullSupplier 142
- PushConsumer 141
- PushSupplier 142
- SupplierAdmin 143
- Interoperable Object Reference (see IOR) 262
- INV_POLICY
 - ClientRequestInfo 209
 - IORInfo 218
- InvalidName
 - class 223
 - ORBInitInfo 223
- InvalidSlot
 - Current methods 215
- InvalidTypeForEncoding
 - class 213
 - Codec 213
- IOP structure::TaggedProfile 262
- IOR 262
- IORCreationInterceptor
 - class 247
- IORInfo
 - BAD_PARAM 218
 - class 218, 220
 - exceptions 218
 - INV_POLICY 218
 - methods 218
 - validity 218
- IORInfo class 218
- IORInfoExt
 - class 220
 - methods 220
- IORInterceptor
 - class 220
 - methods 221
- IObject (Interface Repository object) 100
- IObject (Interface Repository objects)
 - methods 100

L

- LOCAL_SCOPE 9
- Location Service
 - agent 273
 - Fail 278
 - Seq 280
 - SeqSeq 281
 - TriggerDesc 279
 - TriggerHandle 279

M

- manipulating object references 17

- MarshalInBuffer
 - class 265, 269
 - methods 265, 268
- MarshalOutBuffer
 - methods 269, 272
- members
 - argument in Parameter 226
 - format in encoding 216
 - major_version in encoding 216
 - minor_version in encoding 216
 - mode in Parameter 226
- memory management semantics 14
- methods
 - adapter_id in ServerRequestInfo 231
 - adapter_manager_state_changed in IORInterceptor 221
 - adapter_name in ServerRequestInfo 231
 - adapter_state_changed in IORInterceptor 221
 - adapter_template in IORInfo 218
 - add_client_request_interceptor in ORBInitInfo 223
 - add_ior_component in IORInfo 218
 - add_ior_component_to_profile in IORInfo 218
 - add_ior_interceptor in ORBInitInfo 223
 - add_reply_service_context in ServerRequestInfo 231
 - add_request_service_context in ClientRequestInfo 209
 - add_server_request_interceptor in IORInfoExt 220
 - add_servert_request_interceptor in ORBInitInfo 223
 - allocate_slot_id in ORBInitInfo 223
 - arguments in ORBInitInfo 223
 - arguments in RequestInfo 227
 - bind in NamingContext 126
 - bind_context in NamingContext 126
 - bind_new_context in NamingContext 126
 - BOA 9
 - change_implementation in OAD 119
 - codec_factory in ORBInitInfo 223
 - components_established in IORInterceptor 221
 - connect_push_supplier in ProxyPushConsumer 140
 - Contained 85
 - Container 87
 - Context 14
 - contexts in RequestInfo 227
 - create in EventChannelFactory 139
 - create_by_name in EventChannelFactory 139
 - create_codec in CodecFactory 214
 - create_policy in PolicyFactory 227
 - create_struct in Container 87
 - current_factory in IORInfo 218
 - decode in Codec 213
 - decode_value in Codec 213

- destroy in EventChannel 138
- destroy in EventChannelFactory 139
- destroy in Interceptor 217
- destroy in NamingContext 126
- destroy_on_unregister in OAD 119
- disconnect_pull_supplier 142
- disconnect_push_consumer in
 - PullConsumer 141
- disconnect_push_supplier in
 - PushSupplier 142
- effective profile in
 - ClientRequestInfo 209
- effective_target in
 - ClientRequestInfo 209
- encode in Codec 213
- encode_value in Codec 213
- establish_components in
 - IORInterceptor 221
- exceptions in RequestInfo 227
- extraction methods in Any 55
- for_suppliers in EventChannel 138
- forward_reference in RequestInfo 227
- full_poa_name in IORInfoExt 220
- get_cluster_manager in
 - NamingContextFactory 134
- get_effective_component in
 - ClientRequestInfo 209
- get_effective_components in
 - ClientRequestInfo 209
- get_effective_policy in IORInfo 218
- get_implementation in OAD 119
- get_reply_service_context in
 - RequestInfo 227
- get_request_policy in
 - ClientRequestInfo 209
- get_request_service_context in
 - RequestInfo 227
- get_server_policy in
 - ServerRequestInfo 231
- get_slot in Current 215
- get_status in OAD 119
- get_status_all in OAD 119
- get_status_interface in OAD 119
- getslot in RequestInfo 227
- IDLType 97
- insertion methods in Any 56
- InterfaceDef 98
- IObject 100
- list_all_roots in
 - NamingContextFactory 134
- lookup_by_name in
 - EventChannelFactory 139
- lookup_id in Repository 106
- manager_id in IORInfo 218
- name in Interceptor 217
- NamedValue 65
- new_context in NamingContext 126
- NVList 66
- object_id in ServerRequestInfo 231
- obtain_pull_consumer in
 - SupplierAdmin 143
- obtain_pull_supplier 137
- obtain_push_consumer in
 - SupplierAdmin 143
- obtain_push_supplier 137
- operation in RequestInfo 227
- operation_context in RequestInfo 227
- OperationDef 102
- ORB 22
- orb_id in ORBInitInfo 223
- orb_id in ServerRequestInfo 231
- POA 29
- POAManager 39
- post_init in ORBInitializer 222
- pre_init in ORBInitializer 222
- Principal 41
- pull in PullSupplier 142
- rebind in NamingContext 126
- rebind_context in NamingContext 126
- receive_exception in
 - ClientRequestInterceptor 211
- receive_other in
 - ClientRequestInterceptor 211
- receive_reply in
 - ClientRequestInterceptor 211
- receive_request in
 - ServerRequestInterceptor 233
- receive_request_service_contexts in
 - ServerRequestInterceptor 233
- received_exception in
 - ClientRequestInfo 209
- received_exception_id in
 - ClientRequestInfo 209
- reg_implementation in OAD 119
- register_initial_reference in
 - ORBInitInfo 223
- register_policy_factory in
 - ORBInitInfo 223
- remove_state_contexts in
 - NamingContextFactory 134
- reply_status in RequestInfo 227
- Repository 106
- Request 69
- request_id in RequestInfo 227
- resolve in NamingContext 126
- resolve_initial_references in
 - ORBInitInfo 223
- response_expected in RequestInfo 227
- result in RequestInfo 227
- root_context in
 - ExtendedNamingContextFactory 135
- send_exception in
 - ServerRequestInterceptor 233
- send_other in
 - ServerRequestInterceptor 233
- send_poll in
 - ClientRequestInterceptor 211
- send_reply in
 - ServerRequestInterceptor 233
- send_request in
 - ClientRequestInterceptor 211
- sending_exception in
 - ServerRequestInfo 231
- ServantActivator 42

- ServantBase 43
- ServantLocator 44
- server_id in ServerRequestInfo 231
- ServerRequest 73
- set_slot in Current 215
- set_slot in ServerRequestInfo 231
- state in IORInfo 218
- sync_scopoe in RequestInfo 227
- SystemException 46, 48
- target in ClientRequestInfo 209
- target_is_a in ServerRequestInfo 231
- target_most_derived_interface in ServerRequestInfo 231
- try_pull in PullSupplier 142
- unbind in NamingContext 126
- unreg_implementation in OAD 119
- unreg_interface in OAD 119
- unregister_all in OAD 119
- ModuleDef 100
 - class 100
- ModuleDescription 100
 - structure 100
- multi-threaded applications 62

N

- NamedValue 65, 66
 - methods 65
- NamingContext
 - class 125
 - methods 126
- NamingContextExt
 - class 130
 - methods 130
- NamingContextFactory
 - class 133
 - methods 134
- Native Messaging C++
 - DuplicatedRequestTag class 205
 - PollingGroupIsEmpty class 205
 - property struct 203
- native messaging C++
 - RequestAgent class 199
- Native Messaging for C++
 - interfaces and classes 199
 - OctetSeq class 204
 - Property fields 203
 - Property IDL definition 203
 - PropertySeq class 203
 - REPLY_NOT_AVAILABLE constant 202
 - REPLY_NOT_AVAILABLE IDL
 - definition 203
 - ReplyRecipient class 202
 - ReplyRecipient methods 202
 - RequestAgent IDL definition 199
 - RequestAgent methods 200
 - RequestDesc fields 201
 - RequestDesc IDL definition 201
 - RequestDesc struct 201
 - RequestNotExist class 205
 - RequestTag typedef 204
 - RequestTagSeq class 204

- typedef Cookie 204
- NativeDef
 - class 101
- NVList 65, 66
 - methods 66

O

- OAD
 - IDL 117
- OAD interface 117
- Object 17
 - class with QoS 254
 - methods 17
 - VisiBroker extensions 19
- Object Activation Daemon
 - OAD interface 117
- Object Request Broker. See ORB 22
- ObjectStatus 122
- ObjectStatusList
 - class 122
- online Help Topics
 - accessing 1
- OP_NORMAL 104
- OP_ONEWAY 104
- OperationDef 101
 - methods 102
- OperationDescription
 - structure 103
- OperationMode 104
 - enum 104
 - NORMAL 104
 - ONEWAY 104
- ORB 22
 - class 22
 - extensions to CORBA 28
 - methods 22
- ORBInitializer
 - class 222
 - methods 222
- ORBInitInfo
 - BAD_INV_ORDER 223
 - class 223
 - DuplicateName 223
 - exceptions 223
 - InvalidName 223
 - members 223
 - methods 223

P

- Parameter
 - struct 226
- Parameter struct 226
- ParameterDescription 104
 - structure 104
- ParameterList
 - class 226
- ParameterMode 104
 - enum 104
- PDF documentation 3
- PICurrent
 - see also Current 215

POA
 adapter activators 7
 class 29
 core classes 7
 core interfaces 7
 creating child POAs 7
 methods 29
 POALifeCycleInterceptor
 class 243
 POALifeCycleInterceptorManager
 class 244
 POAManager 38
 methods 39
 PolicyCurrent
 class 254
 PolicyFactory
 class 226
 PolicyManager
 class 253
 Portable Interceptors
 interfaces 207
 portable interceptors
 ClientRequestInfo 208
 POA scoped server request
 interceptor 220
 PortableServer
 AdapterActivator 7
 PortableServer_c.hh 245
 PortableServer::Current 16
 methods 16
 PortableServerExt_c.hh 244, 248
 PortalServerExt_c.hh 244
 PrimitiveDef 105
 class 105
 PrimitiveKind 105
 enum 105
 Principal 41
 methods 41
 ProfileBody 261
 programming interface
 agent 273
 AliasDef 81
 Any 49, 65
 ArrayDef 81
 AttributeDef 82
 BindInterceptor 239
 BindOptions 7
 BOA 9
 ChainUntypedObjectWrapperFactory 25
 0
 ClientInterceptor 241
 CompletionStatus 13
 ConstantDef 83
 Contained 85, 100, 101
 Container 86, 100
 Context 14
 DynamicImplementation 53
 DynAny 53
 DynArray 57
 DynEnum 58
 DynSequence 59
 DynStruct 60
 DynUnion 61
 EnumDef 93
 Environment 62
 Exception 17, 45, 47
 ExceptionDef 93
 Fail 278
 IDLType 96, 100
 InterfaceDef 97
 IObject 100
 MarshalInBuffer 269
 MarshalOutBuffer 265, 269
 ModuleDef 100
 ModuleDescription 100
 NamedValue 65
 NVList 65, 66
 Object 17
 OperationDef 101
 ORB 22
 PrimitiveDef 105
 Principal 41
 Repository 106
 Request 69, 72, 76
 Seq 280
 SeqSeq 281
 SequenceDef 107
 StringDef 108
 StructDef 108
 SystemException 45, 47
 TriggerHandler 279
 TypedDef 109
 UnionDef 110
 UntypedObjectWrapper 251
 VISClientInterceptor 243, 244, 245, 246,
 247, 248
 VISInit 283
 WstringDef 114
 ProxyPullConsumer
 interface 139
 ProxyPullSupplier
 interface 140
 ProxyPushConsumer
 interface 140
 ProxyPushSupplier
 interface 140
 PullConsumer
 interface 141
 PullSupplier
 interface 142
 methods 142
 PushConsumer
 interface 141
 PushSupplier
 interface 142
Q
 QoS
 Quality of Service 253
 Quality of Service
 QoS 253
 querying

an object's state 17

R

RebindPolicy

class 256

RefCountServantBase

methods 41

reporting

standard system errors 45

system exceptions 62

user exceptions 62

Repository 106

methods 106

Request 69, 72, 76

methods 69

request interceptors

client 210

server 233

RequestInfo

class 227

methods 227

returning

an object's Typecode 96

RTCORBA::Current 286

RTCORBA::Mutex 287

RTCORBA::NativePriority 288

RTCORBA::Priority 288

RTCORBA::PriorityMapping 289

RTCORBA::PriorityModel 291

RTCORBA::PriorityModelPolicy 292

RTCORBA::RTORB 292

RTCORBA::ThreadPoolId 295

RTCORBA::ThreadPoolPolicy 295

S

Seq

methods 280

SeqSeq

methods 281

SequenceDef 107

class 107

ServantActivator

class 42

methods 42

ServantBase

methods 43

ServantLocator

class 44

methods 44

ServantManager

class 45

Server Manager

container interface 145

container methods for C++ 145

storage interface 149

ServerRequest

methods 73

ServerRequestInfo

BAD_INV_ORDER 230

class 230

exceptions 230

methods 231

ServerRequestInterceptor

class 233, 246

methods 233

ServerRequestInterceptorManager

class 247

setting

an object's state 17

skeletons 6

square brackets 2

StringDef 108

class 108, 110

struct

Codec encoding 216

Parameter 226

UnionMember 111

struct BindOptions 7

struct Parameter 226

StructDef 108

class 108

StructMember

structure 109

structure

AttributeDescription 83

BindOptions 7

Desc 277

ExceptionDescription 94

FullInterfaceDescription 94

FullValueDescription 95

InterfaceDescription 99

IOR 262

ModuleDescription 100

OperationDescription 103

ParameterDescription 104

StructMember 109

TriggerDesc 279

TypeDescription 109

UnionMember 111

ValueDescription 114

VersionSpec 111

structure ExceptionDescription 94

structure ParameterDescription 104

stubs 5

SupplierAdmin

interface 143

symbols

ellipsis ... 2

vertical bar | 2

system exception classes 17

SystemException 45, 47

class 45

defined 46, 48

methods 46, 48

T

TaggedProfile 262

TCKind 75

descriptions 75

TPool 13

TriggerDesc 279

TriggerHandler

- methods 280
- TriggerHandler class 279
- TSession 13
- TypeCode
 - constructors 76
 - methods 76
- TypedefDef 109
 - class 109
- TypeDescription 109
- TypeMismatch
 - class 213

U

- UnionDef 110
- UnionMember 111
 - structure 111
- UnknownEncoding
 - class 214
 - CodecFactory 214
- UntypedObjectWrapper 251
 - class 251
- user exception classes 17

V

- ValueBoxDef
 - class 111
- ValueDef
 - class 111
- ValueDescription
 - structure 114
- Var classes 6
- vdlog library 309
- VersionSpec 111
- vinit.h 283
- VISClientInterceptor 243, 244, 245, 246, 247, 248
- VISClosure
 - class 249
- VISClosureData
 - class 250
- VISDAppender 312
- VISDAppenderFactory 311
- VISDConfig 314
- VISDLayout 313
- VISDLayoutFactory 313
- VISDLogger 310
- VISDLoggerMgr 309
- VISDLogLevel 316
- VISDLogRecord 315
- VisiBroker interceptors
 - interceptor managers 237
 - InterceptorManager class 238
 - IOR templates 238
- VISInit 283
 - methods 283, 284
- VISPTransBridge 306
- VISPTransConnectionFactory 300
- VISPTransListener 301
- VISPTransListenerFactory 302
- VISPTransProfileBase 303
- VISPTransProfileFactory 305

- VISPTransRegistrar 307
- vobjwrap.h 250
- VSPTransConnection 297

W

- WstringDef 114
 - class 114